



GENERAL PRODUCT INFORMATION:

This product is suitable for wet locations.

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product can be dimmed with most ELV, TRIAC, or 0-10V dimmers.

This instruction shows a typical installation.



CAUTION - RISK OF FIRE
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
Use minimum 90°C supply conductors.





7400 Linder Ave, Skokie, IL 60077

847.410.4400

www.techlighting.com


© 2019 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.
A Generation Brands Company

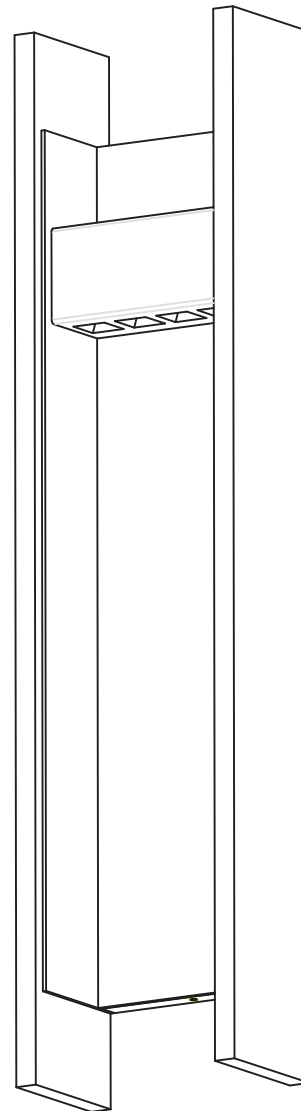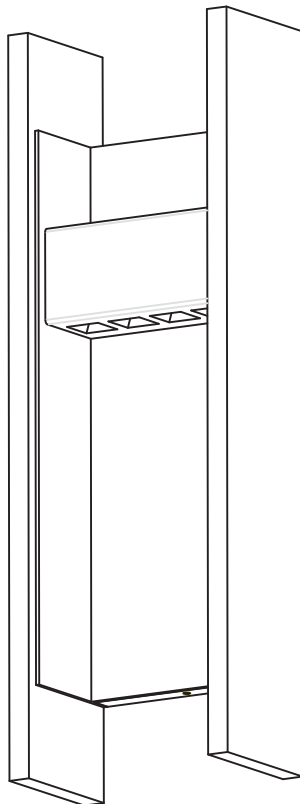

SAVE THESE INSTRUCTIONS!

Install the Fixture

1A

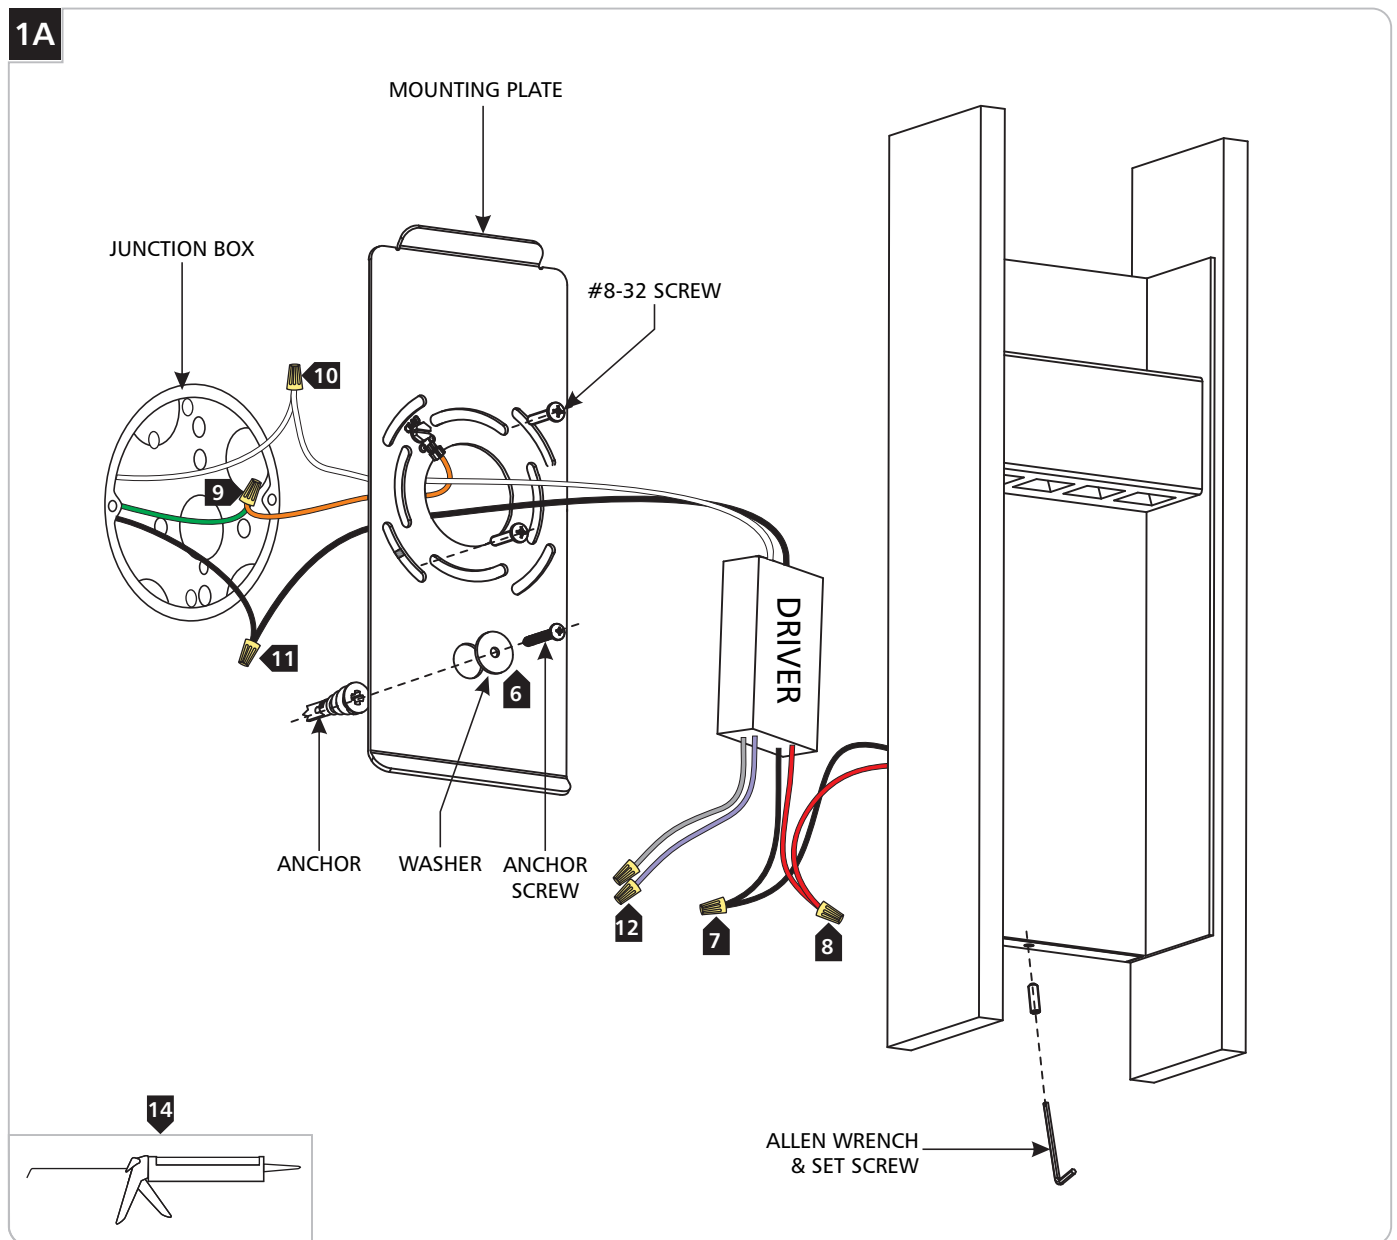

- 1 With the provided Allen wrench, remove the set screw at the bottom of the fixture base.
- 2 Remove the mounting plate from the fixture base
- 3 Install the mounting plate to the junction box with the two #8-32 screws provided.
- 4 Verify that the mounting plate is level before continuing. Line up an anchor tip with the center of an anchor hole, and push the anchor into the wall up to the threads.
- 5 Screw the anchor in the rest of the way with a Phillips-head screwdriver.
- 6 Slide an anchor screw through a washer, and screw it into an anchor to secure the fixture base to the wall.
- 7 Connect the black driver wire to the black fixture wire with a wire nut.
- 8 Connect the red driver wire to the red fixture wire with a wire nut.
- 9 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 10 Connect the white driver wire to the neutral power line with a wire nut.
- 11 Connect the black driver wire to the hot power line with a wire nut.
- 12 Use the gray and purple dimming wires for 0-10v dimming application (if not in use, make sure to cap these wires off). **Warning:** The purple and gray wires are only used for 0-10v dimming. For all other applications, do not connect the gray and purple wires.
- 13 Properly place the driver, all wires, and wire nut connections into the fixture base, mount the fixture back onto the mounting plate, and reinstall the set screw (reversal of step 1A).
- 14 For wet locations, caulk around the fixture base with waterproof construction sealant.