

Zur Pathway

7000AZUR_

1.1




GENERAL PRODUCT INFORMATION:

This product is suitable for wet locations.



12VAC input only.

If using Tech Lighting magnetic transformers, this product be dimmed with a low-voltage magnetic dimmer. For all other transformers, consult with the manufacturer for compatible dimmers.

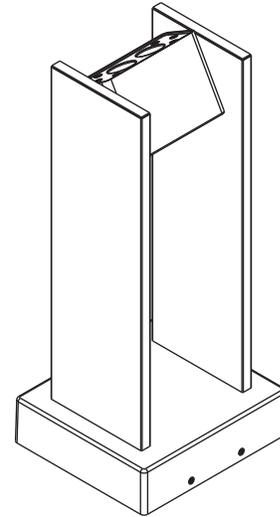

WARNING – Risk of Electric Shock. Install all luminaires 10 feet (3.05 m) or more from a pool, spa, or fountain.

Unit low voltage cable is to:


- a) be protected by routing in close proximity to the luminaire or fitting, or next to a building structure such as a house or deck;
- b) not be buried except for a maximum 6 inches (15.2 cm) in order to connect to the main low voltage cable; and
- c) have the length cut off so that it is connected to a connector within 6 inches (15.2 cm) from a building structure, a luminaire, or fitting.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


Use minimum 90°C supply conductors.

Install the Fixture

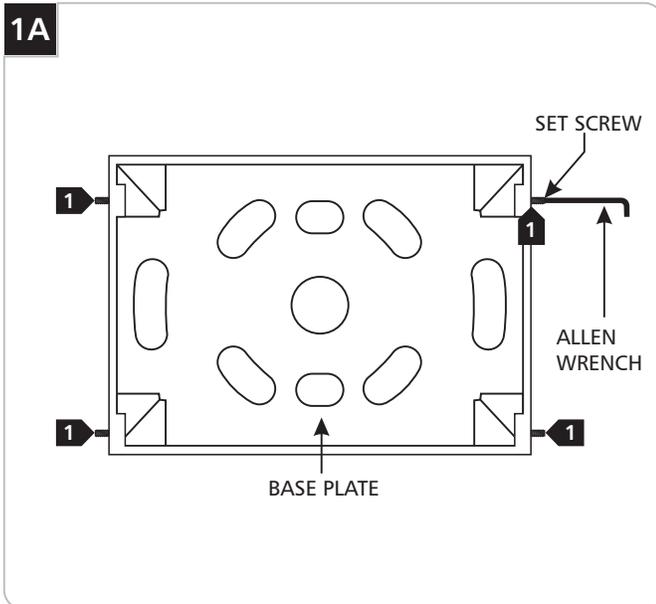


- 1 Loosen (**Do Not Remove**) the four set screws on fixture base with the provided Allen wrench and remove the base plate.

INSTALLATION OPTIONS:
For Stake Install - see section 2
For Concrete and other Hard Surfaces - see section 3

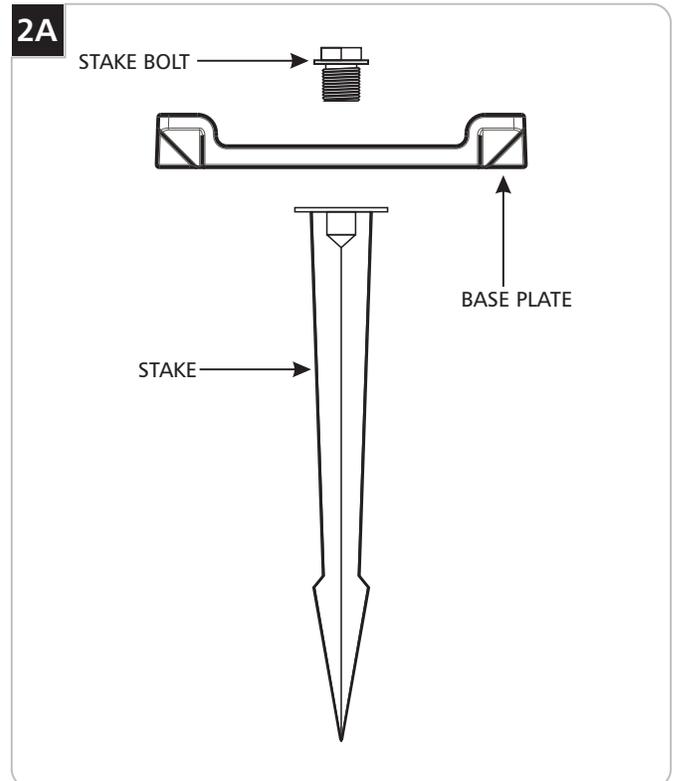


- 1 Attach the stake to the base plate by tightly screwing down the provided stake bolt through the center hole of the base plate and the stake.
- 2 Reattach the base plate assembly to fixture and tighten down the set screws (reversal of Section 1A).


Install the Fixture to Concrete (or other hard surfaces)

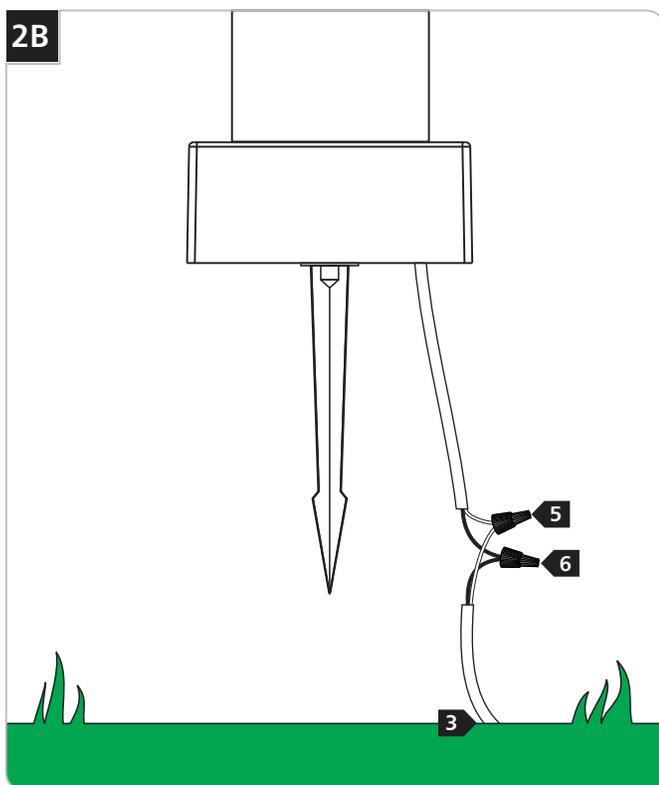


- 3 Bring the power wires to the fixture location in accordance with local electrical codes.
- 4 Connect the white fixture wire to one of the low-voltage power line wire with the provided outdoor waterproof wire nut.
- 5 Connect the black fixture wire to the remaining low-voltage power line wire with the provided outdoor waterproof wire nut.

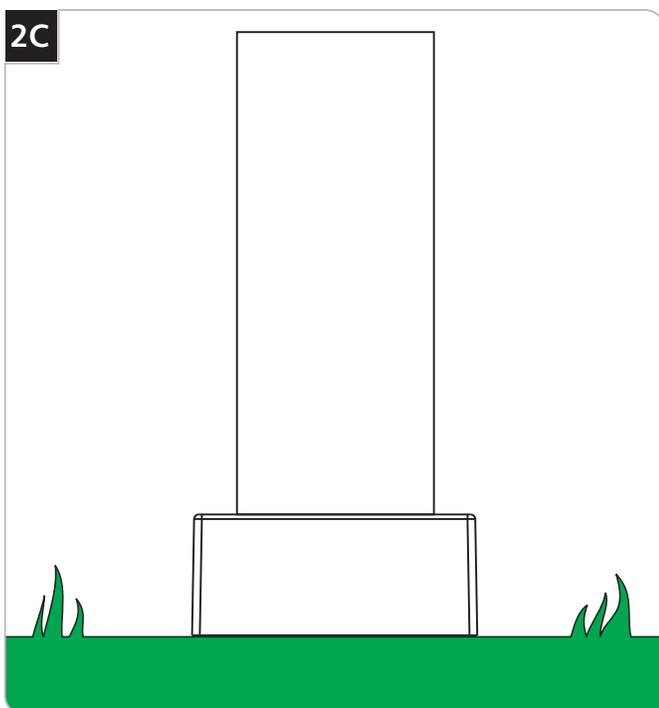

- 6 Stake the fixture to the desired location and properly bury the wire and wire nut connections.

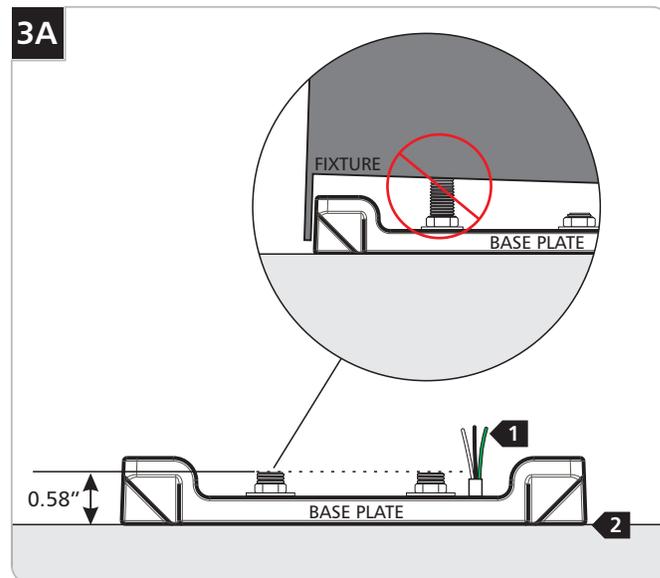


- 1 Bring the power wires to the fixture location in accordance with local electrical codes.
- 2 Mount the base plate to an even and smooth surface using the appropriate template, which can be found on the following pages. Ensure that length of the lag bolts or anchor bolts do not exceed 0.58" from the mounting surface in order to leave enough clearance for the fixture to fit properly over the base plate.

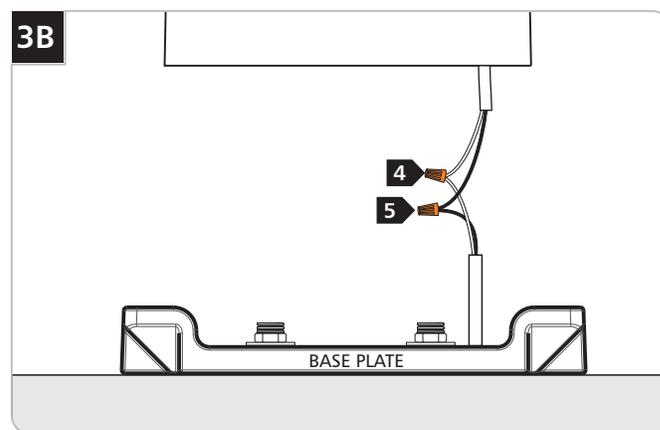

- 3 Bring the power wires to the fixture location in accordance with local electrical codes.
- 4 Connect the white fixture wire to one of the low-voltage power line wire with the provided outdoor waterproof wire nut.
- 5 Connect the black fixture wire to the remaining low-voltage power line wire with the provided outdoor waterproof wire nut.


Adjust the Fixture Head

4A

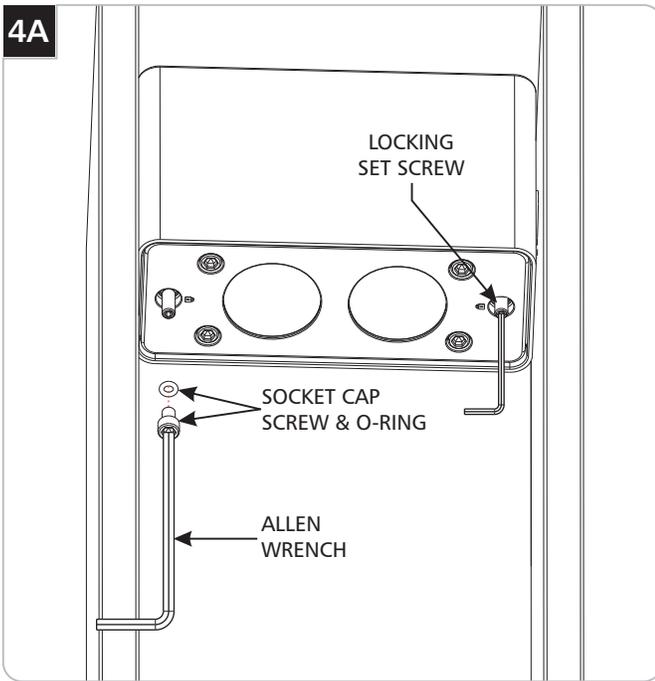

- 1 Remove the two socket head screws and O-rings using the provided Allen wrench to access the locking set screw. Make sure to only loosen the two set screws marked by padlock symbol.
- 2 Loosen (do not remove) the locking set screw on each side of the fixture head with the provided Allen wrench.




4B

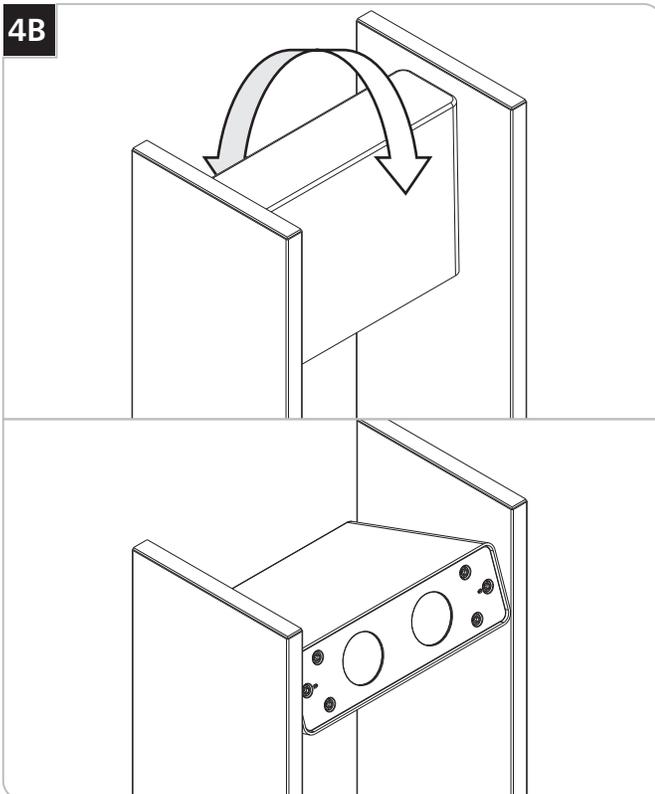

- 3 Adjust the fixture head to the desired position and re-tighten the set screws to secure in place. NOTE: Maximum rotation of the fixture head is 300°.
- 4 Re-install the O-rings and socket cap screws (reversal of step 1).

Adjust Multiple Fixture Heads


5A

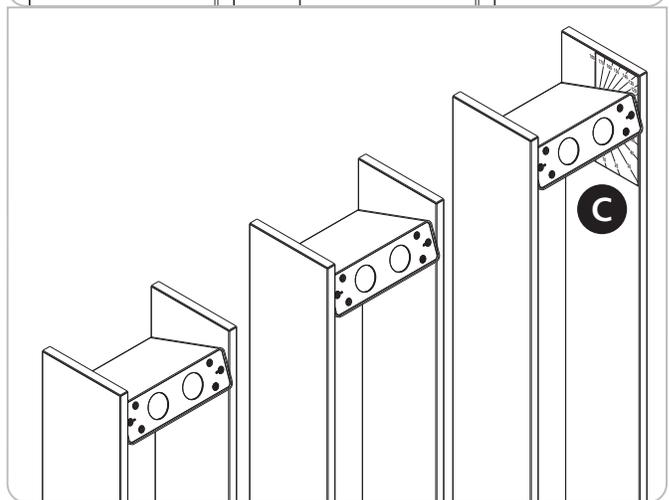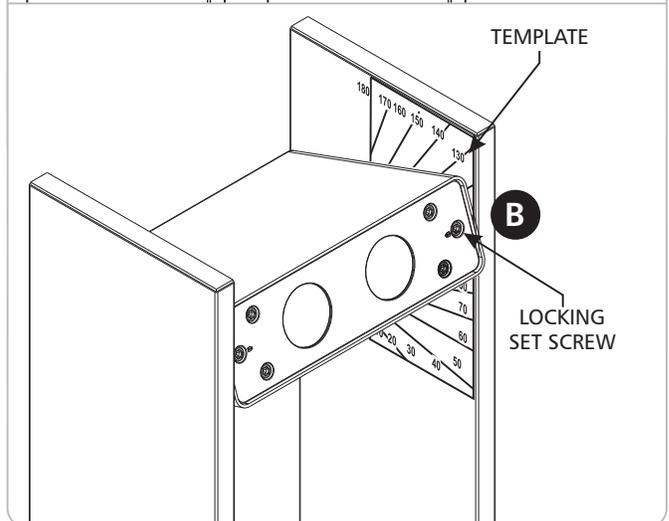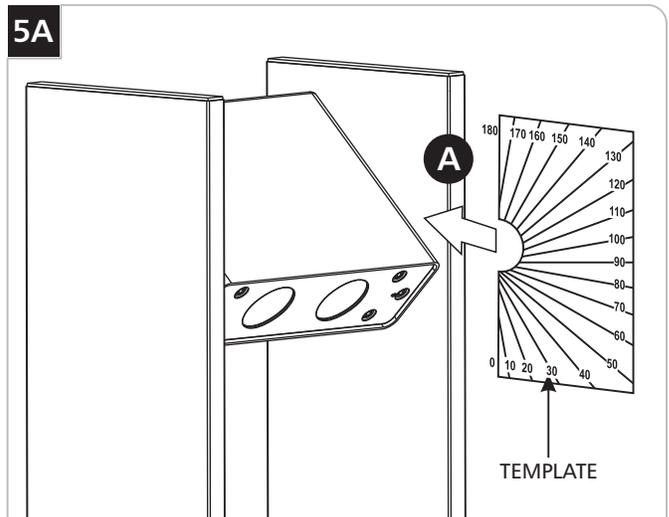

- 1 Use the following instructions along with the provided template to adjust multiple fixtures to the same angle:
 - a Insert the template in between the head and fixture, then align the template edge with the fixture edge.
 - b Adjust the head to the desired angle and take note of the angle using the locking set screw as a guide in reference to the template.
 - c Adjust the other fixtures to the same angle using the template and locking set screw as a point of reference.


FIXTURE HEAD PROTRACTOR TEMPLATE

WARNING: If printing this template, ensure printer settings are set to actual size.

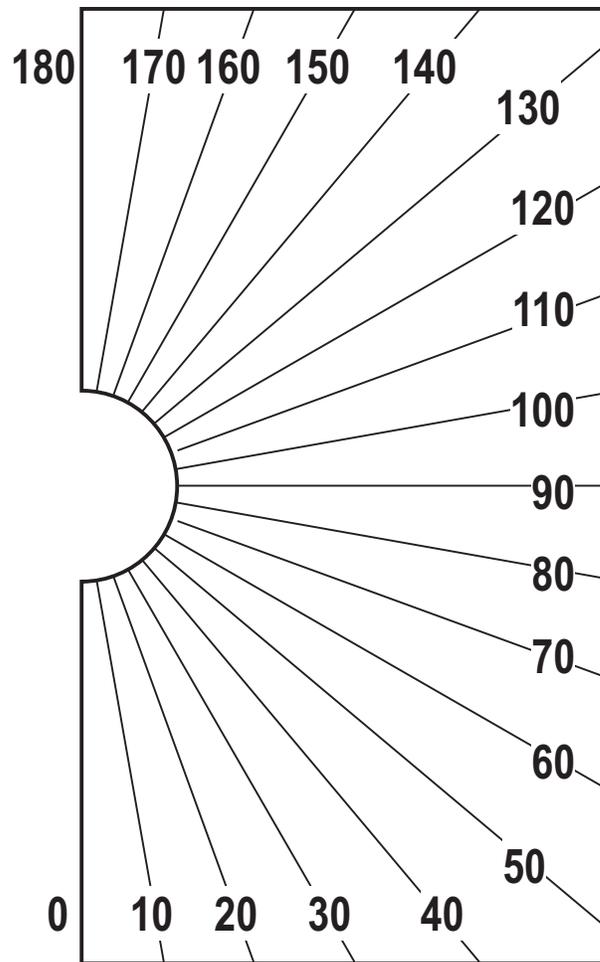

RECTANGULAR MOUNTING PLATE TEMPLATE

WARNING: If printing this template, ensure printer settings are set to actual size.

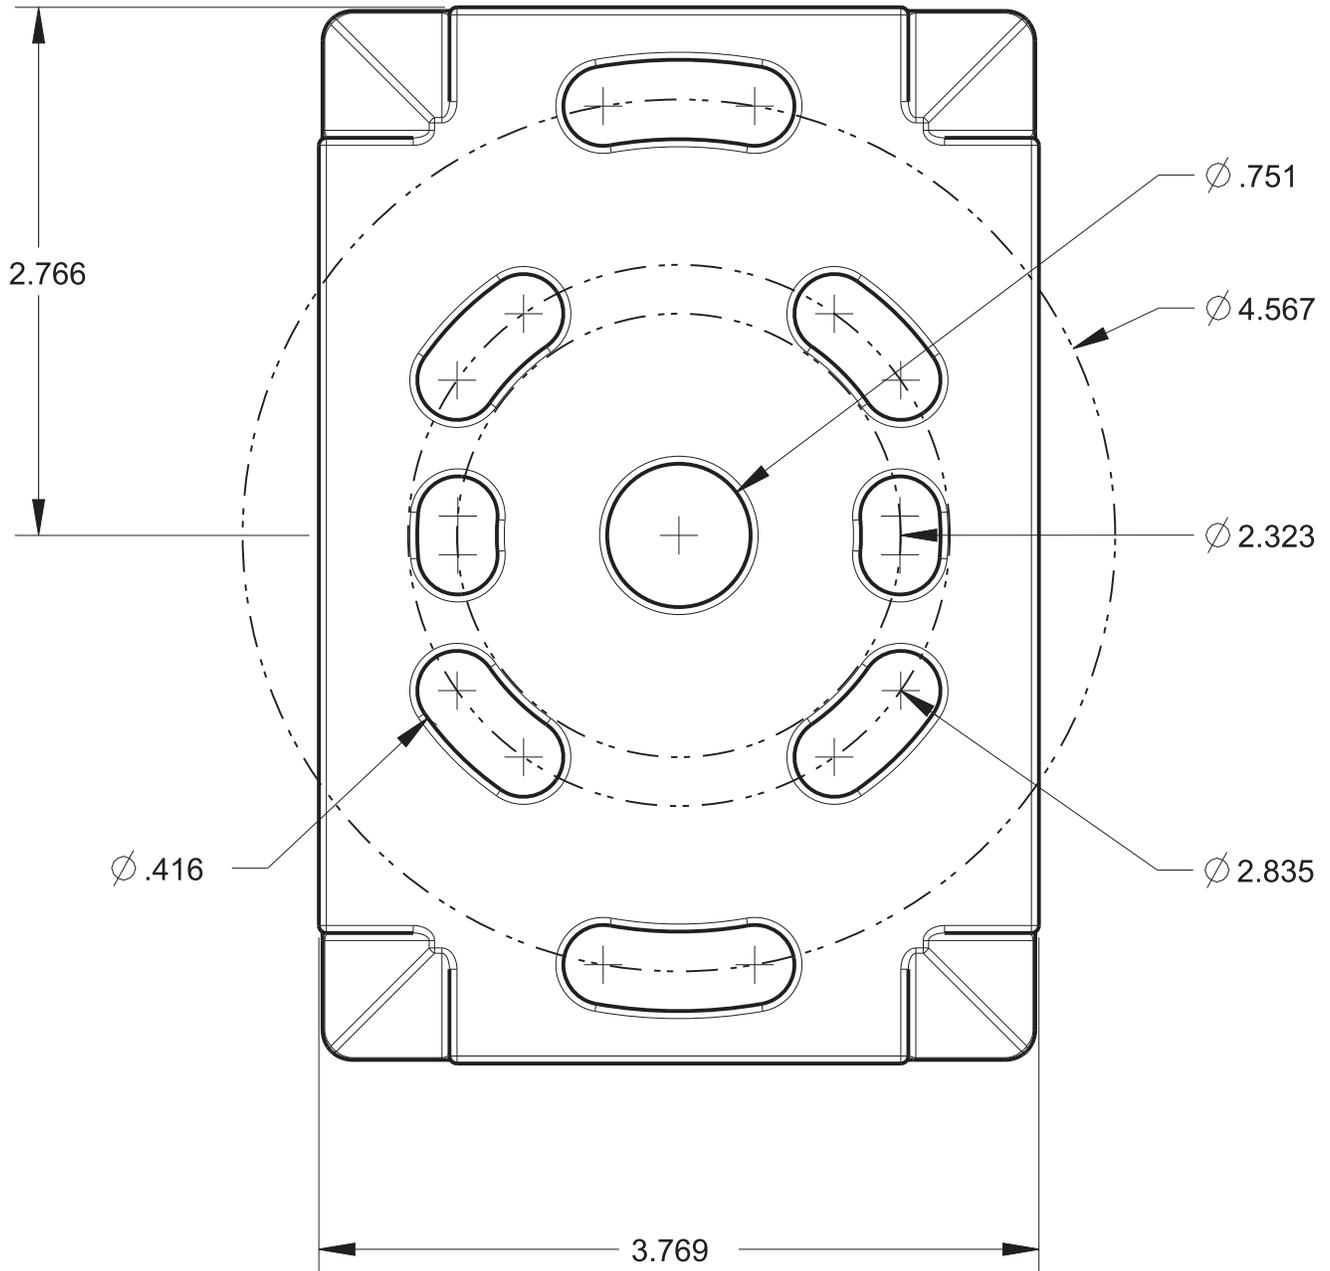

SAVE THESE INSTRUCTIONS!



7400 Linder Ave, Skokie, IL 60077
847.410.4400

www.techlighting.com

© 2018 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.

A Generation Brands Company