

LOW - VOLTAGE PENDANTS

Cone Pendant

DESCRIPTION

Case glass cone with reflective white interior or transparent glass cone. Includes low-voltage, 50 watt halogen bi-pin lamp or 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module and six feet of field-cutttable cable. Dimmable with low-voltage electronic or magnetic dimmer (based on transformer). Works with SORAA.

INSTALLATION


Socket terminates with FreeJack male connector, which may be installed into a system connector. Elements ordered with a system prefix include a connector for that system. For use on T~TRAK, order FreeJack version and T~TRAK FreeJack Connector (sold separately).

ACCESSORIES & OPTICAL CONTROLS

SORAA® LED Bi-Pin Replacement Pendant Module, Swag Hook

WEIGHT

1.35lb / 0.61kg ±

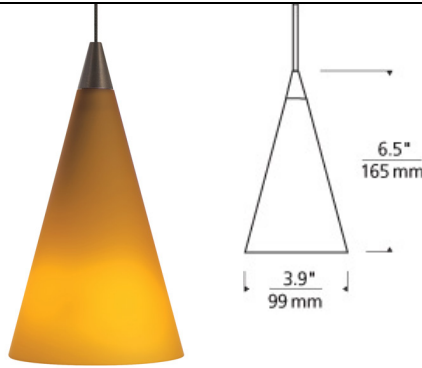

cobalt



amber

cobalt

red

white

ORDERING INFORMATION

700	SYSTEM	CON	COLOR	FINISH	LAMP
FJ	FREEJACK		A AMBER	Z ANTIQUE BRONZE	12 VOLT HALOGEN
K	KABLE LITE		P COBALT	C CHROME	-LEDS930 12 VOLT LED 90 CRI 3000K
MP	MONOPOINT		R RED	S SATIN NICKEL	-24 24 VOLT HALOGEN
MO	MONORAIL		W WHITE		
MO2	TWO-CIRCUIT MONORAIL				

Note: Note: MP includes 4" Round Flush Canopy.

Antique Bronze is not available for Kable Lite.

Chrome not offered on Monorail & Two~Circuit Monorail.



TECH LIGHTING®
 7400 Linder Avenue T 847.410.4400
 Skokie, Illinois 60077 F 847.410.4500

Tech Lighting, L.L.C.

700 ____ CON ____

FIXTURE TYPE: _____

JOB NAME: _____

NOTES: _____
