

LOW - VOLTAGE PENDANTS

Pinnacle Pendant

DESCRIPTION

Sleek glass cone, available in large and small versions. Small rated for (1) low-voltage, 35 watt max MR16/Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer) (Lamp Not Included) Large rated for (1) low-voltage, 50 watt max, bi-pin/Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer) (Lamp Not Included) LED includes 12 volt 8 watt, 300 delivered lumens, 3000K, replaceable SORAA® LED module. Dimmable with low-voltage electronic or magnetic dimmer (based on transformer). Works with SORAA.

INSTALLATION


Socket terminates with FreeJack male connector, which may be installed into a system connector. Elements ordered with a system prefix include a connector for that system.

ACCESSORIES & OPTICAL CONTROLS

SORAA® LED Bi-Pin Replacement Pendant Module, Swag Hook

WEIGHT

1-1.9lb / 0.45-0.86kg ±

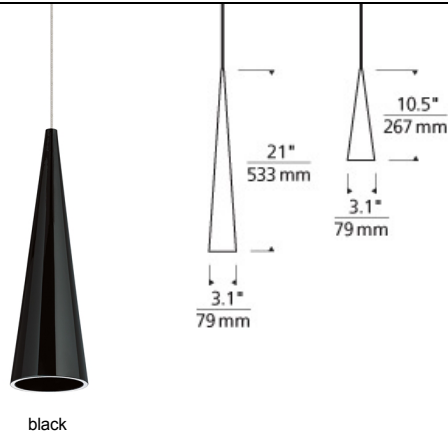

black



ORDERING INFORMATION

700	SYSTEM	PIN	SHAPE OR SIZE	COLOR	FINISH	LAMP
FJ	FREEJACK		L LARGE	B BLACK	Z ANTIQUE BRONZE	NO LAMP
KL	KABLE LITE		S SMALL	C CHROME		-LEDS930 12 VOLT LED 90 CRI 3000K
MP	MONOPOINT			N BROWN	S SATIN NICKEL	-LEDS930 12 VOLT LED 90 CRI 3000K (T20/T24)
MO	MONORAIL			W WHITE		-24 24 VOLT HALOGEN
MO2	TWO-CIRCUIT MONORAIL					

Note: MP includes 4" Round Flush Canopy.
Large & Antique Bronze not available on Kable Lite.

Chrome not offered on Monorail & Two-Circuit Monorail.



700 ____ PIN _____

FIXTURE TYPE: _____

JOB NAME: _____

NOTES: _____
