

The Ash pendant is a modern take on the classic industrial-style light fixture. The Ash features a sleek metal shade and either an acrylic diffuser that creates diffused light from under the shade creating an intriguing column of light, or a clear lens hidden within the shade for beautifully even LED illumination with minimal uplight.

Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized acrylic lensing
- IP-65 Rated

SPECIFICATIONS

DELIVERED LUMENS	619 or 1115 with clear cylinder 400 or 863 with clear lens
WATTS	8 or 18
VOLTAGE	Universal 120-277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Ceiling
ADJUSTABILITY	Adjustable stem length (3", 6" and 12"). Integrated ball joint that accommodates sloped ceiling up to 45°.
CCT	2700K or 3000K
CRI	90+
COLOR BINNING	3 Step
BUG RATING	B0-U1-G0
DARK SKY	Compliant (Lensed version only)
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years

* Visit techlighting.com for specific warranty limitations and details.



ASH PENDANT
shown in charcoal/clear cylinder




ASH PENDANT
shown in bronze/clear lens

ORDERING INFORMATION

7000PASH	CRI / CCT	LENS	FINISH	VOLTAGE
L927	LED LO-OUTPUT 90 CRI, 2700K	C CLEAR CYLINDER	Z BRONZE	UNV 120V-277V UNIVERSAL
H927	LED HI-OUTPUT 90 CRI, 2700K	D CLEAR LENS	H CHARCOAL	
L930	LED LO-OUTPUT 90 CRI, 3000K			
H930	LED HI-OUTPUT 90 CRI, 3000K			

RIGID STEM ONLY (ADJUSTABLE 3", 6" AND 12" LENGTHS).

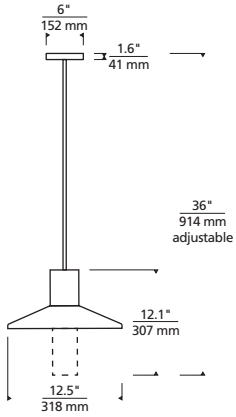


Ash Pendant

PHOTOMETRICS*

*For latest photometrics, please visit www.techlighting.com/OUTDOOR

ASH 16 WITH CYLINDER

- Total Lumen Output: 619
- Total Power: 8
- Luminaire Efficacy: 77
- Color Temp: 2700K or 3000K
- CRI: 90
- BUG Rating: B0-U1-G0

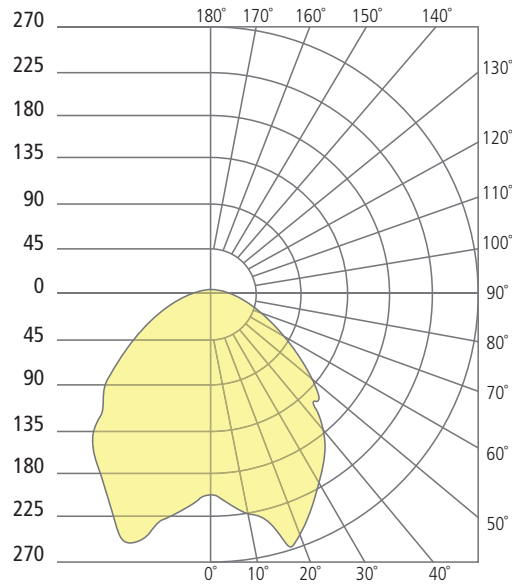

PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES



© 2017 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.