

The Aspen outdoor wall sconce creates an elegant elongated column of beautifully diffused light. The Aspen is available in four sizes (8", 15", 26", 36") to meet architectural scale; ideal for way-finding and general outdoor illumination. The Aspen features energy-efficient, fully dimmable integrated LED lamping. Available in two finishes: Bronze and Charcoal.

High quality LM80-tested LEDs

for consistent long-life performance and color

Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing
- IP-65 Rated

SPECIFICATIONS

| | |
|-----------------------|---|
| DELIVERED LUMENS | 648 |
| WATTS | 22 |
| VOLTAGE | Universal 120-277V, with integral transient 2.5kV surge protection (driver) |
| DIMMING | 0-10, ELV |
| LIGHT DISTRIBUTION | Symmetric |
| MOUNTING OPTIONS | Wall |
| PERFORMANCE OPTIONS | In-Line Fuse / Surge Protector |
| CCT | 2700K, 3000K |
| CRI | 90+ |
| COLOR BINNING | 3 Step |
| BUG RATING | B0-U3-G1 |
| DARK SKY | Non-compliant |
| WET LISTED | IP65 |
| GENERAL LISTING | ETL |
| CALIFORNIA TITLE 24 | Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required. |
| START TEMP | -30°C |
| FIELD SERVICEABLE LED | Yes |
| CONSTRUCTION | Aluminum |
| HARDWARE | Stainless Steel |
| FINISH | Marine Grade Powder Coat |
| LED LIFETIME | L70; 70,000 Hours |
| WARRANTY* | 5 Years |



ASPEN 15
shown in bronze




ASPEN 15
shown in charcoal

* Visit techlighting.com for specific warranty limitations and details.

ORDERING INFORMATION

| 7000WASP | CRI / CCT | LENGTH | LENS | FINISH | VOLTAGE | DISTRIBUTION | OPTIONS |
|----------|---------------|---------|-----------|------------|-------------------------|--------------|--------------------------------------|
| 927 | 90 CRI, 2700K | 15" 15" | D DIFFUSE | Z BRONZE | UNV 120V-277V UNIVERSAL | S SYMMETRIC | NONE |
| 930 | 90 CRI, 3000K | | | H CHARCOAL | | | LF IN-LINE FUSE |
| | | | | | | | SP SURGE PROTECTION |
| | | | | | | | LFSP IN-LINE FUSE & SURGE PROTECTION |

ASPEN 15 WALL SCONCE




Aspen 15

PHOTOMETRICS*

*For latest photometrics, please visit www.techlighting.com/OUTDOOR

ASPEN 15

Total Lumen Output: 648
 Total Power: 22
 Luminaire Efficacy: 29
 Color Temp: 3000K
 CRI: 90
 BUG Rating: B0-U3-G1

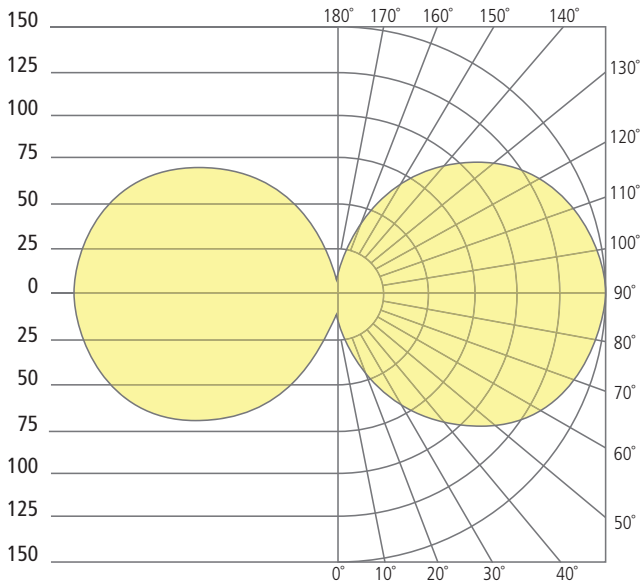

PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES



GENERATION BRANDS
 7400 Linder Avenue, Skokie, Illinois 60077

T 847.410.4400 F 847.410.4500



© 2017 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.