

Foundry 15 Flush Mount

700FMFND15_ 1.0



FLUSH

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is suitable for damp locations.


This product can be dimmed with a low-voltage electronic dimmer.

This instruction shows a typical installation.




CAUTION - RISK OF FIRE
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
Use minimum 90°C supply conductors.

SAVE THESE INSTRUCTIONS!

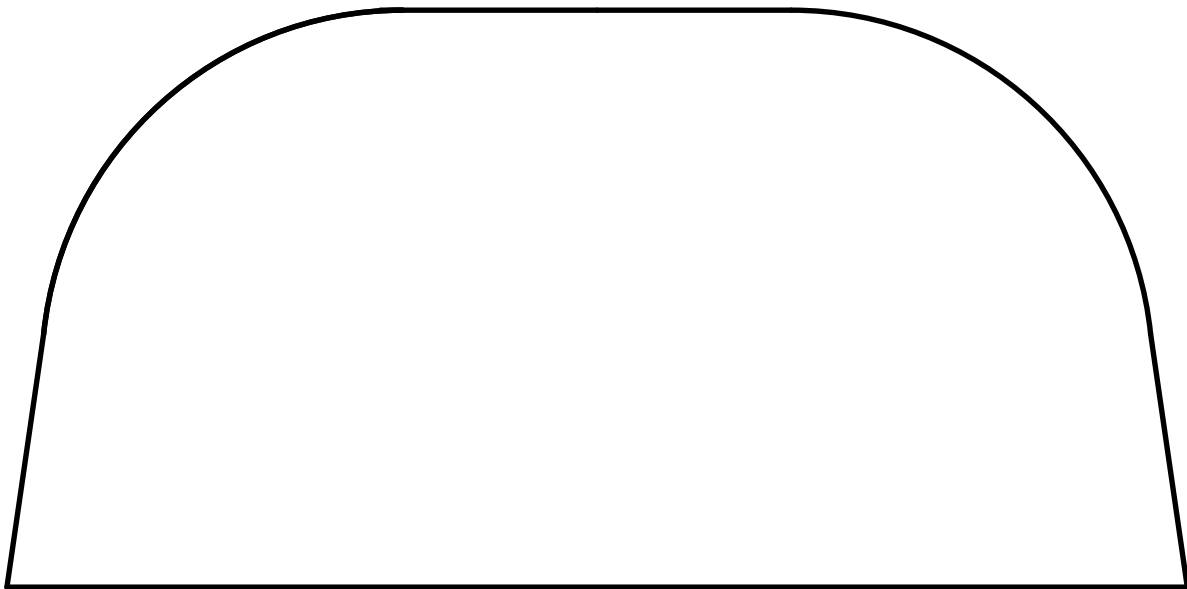

Install the Fixture

1A

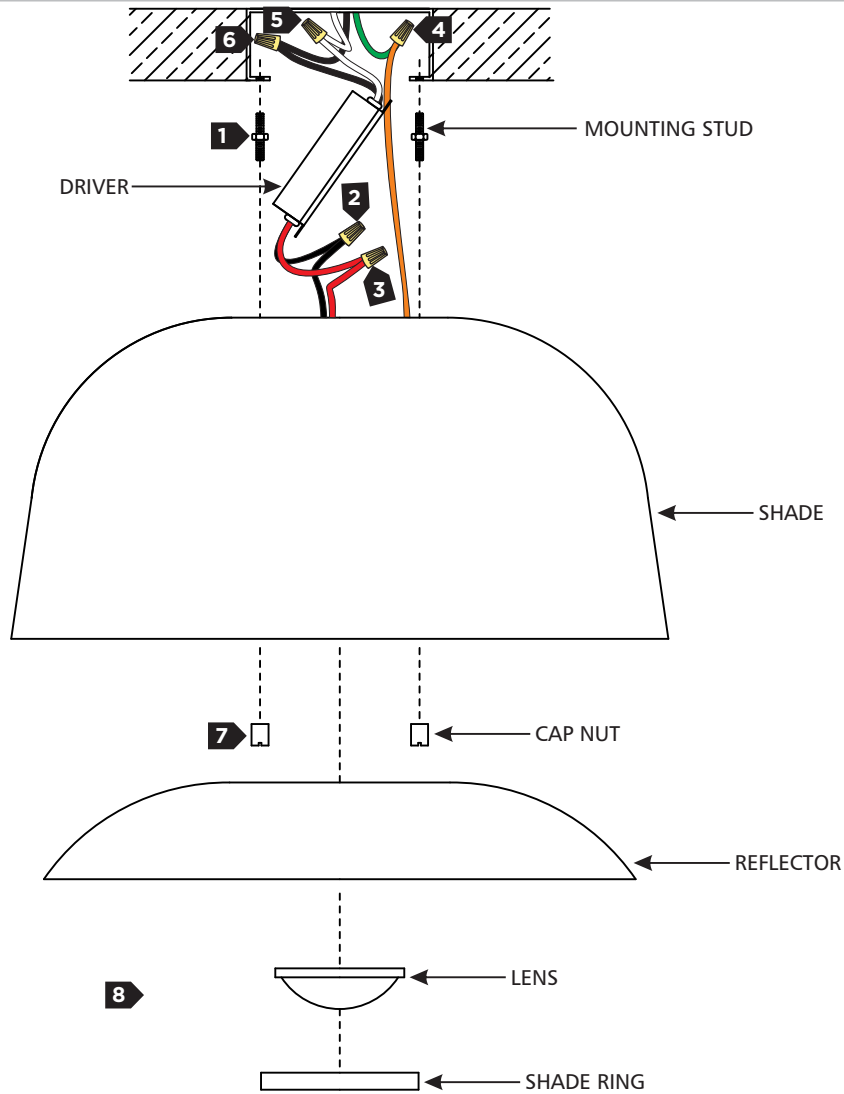

- 1 Install the mounting studs to the junction box. If necessary, adjust the height of the nut.
- 2 Connect the black/blue driver wire to the black/blue fixture wires with a wire nut.
- 3 Connect the red driver wire to the red fixture wires with a wire nut.
- 4 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 5 Connect the white driver wire to the neutral power line with a wire nut.
- 6 Connect the black driver wire to the hot power line with a wire nut.
- 7 Properly place the driver, all wires, and wire nut connections into the junction box, then install the shade assembly onto the mounting studs and secure it in place with the cap nuts.
- 8 Install the reflector and lens into the shade assembly, then secure them in place with the shade ring.

 **TECH LIGHTING**

7400 Linder Ave., Skokie, IL 60077
T 847.410.4400 | F 847.410.4500
www.techlighting.com