

# Kola 13 and 22 Flush Mount

700FMKLA\_ 1.0



FLUSH

### GENERAL PRODUCT INFORMATION:



These fixtures are intended to be installed utilizing NEC compliant junction boxes.


This product is suitable for damp locations.

This product can be dimmed with most low-voltage electronic dimmers.

This instruction shows a typical installation.


**CAUTION - RISK OF FIRE**  
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.  
**Use minimum 90°C supply conductors.**

**SAVE THESE INSTRUCTIONS!**

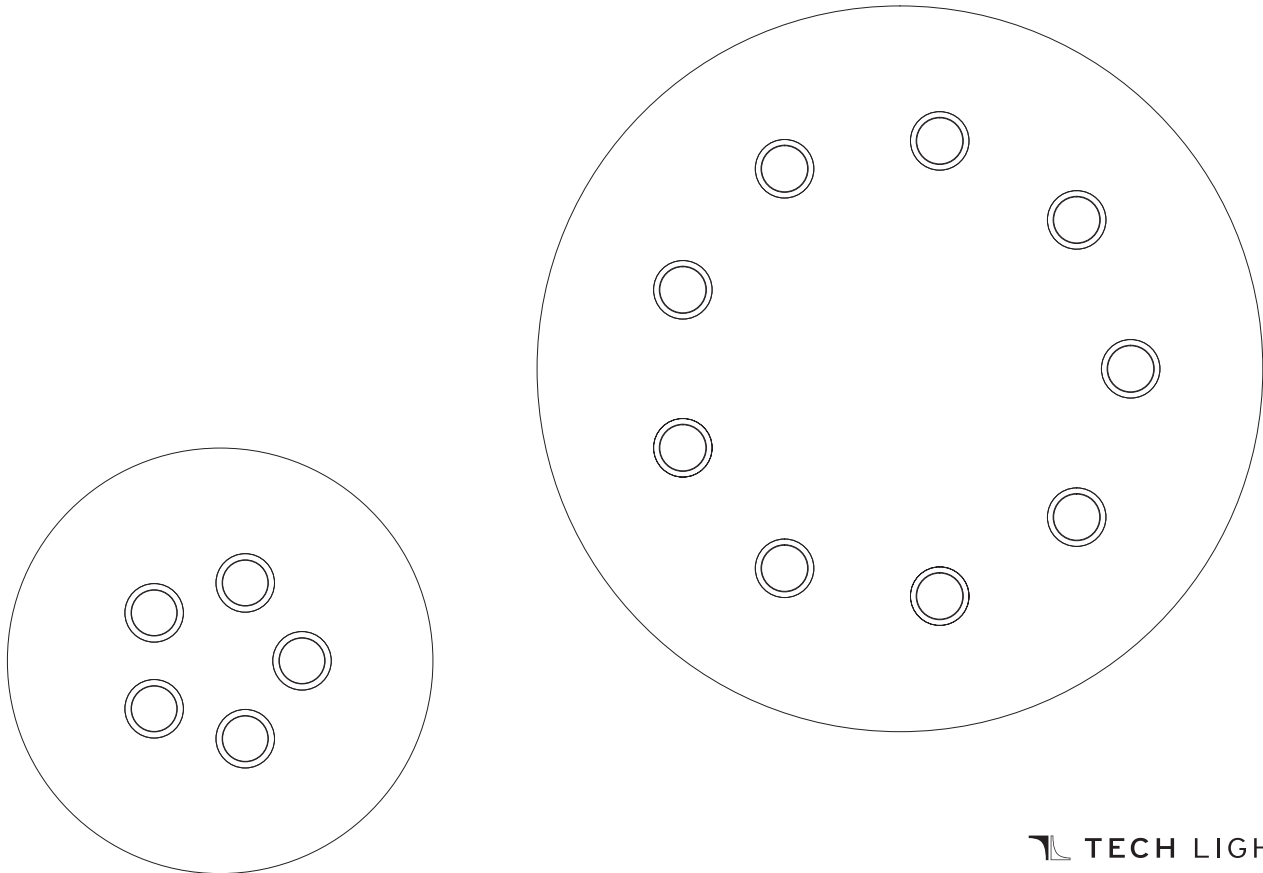

7400 Linder Ave., Skokie, IL 60077  
T 847.410.4400 | F 847.410.4500  
www.techlighting.com

## Install the Fixture

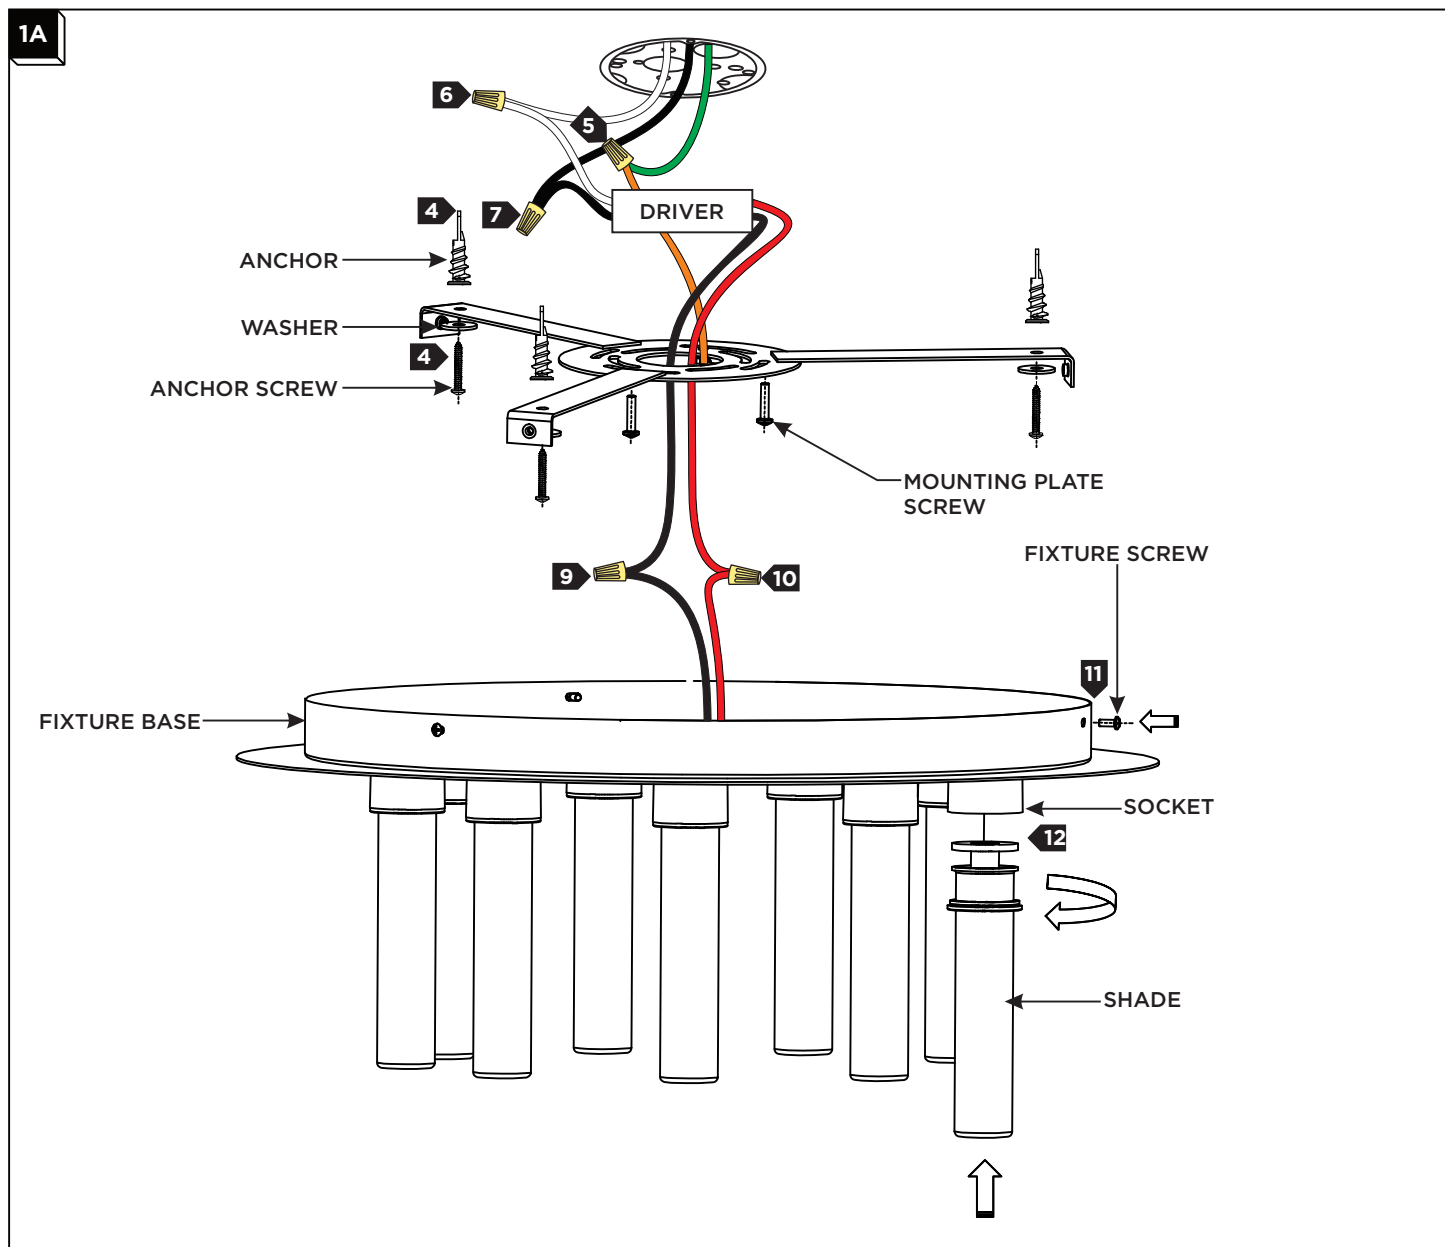

- 1 Separate the mounting plate from the fixture by removing the fixture screws.
- 2 Temporarily install the mounting plate to the junction box with the provided #8-32 screws.
- 3 Mark the location of the anchors and remove the mounting plate.
- 4 Line the anchor tip to the marked location and push the anchor into the ceiling up to the threads. Screw the anchor in the rest of the way with a Phillips-head screwdriver. Repeat for remaining anchor holes.
- 5 Connect the fixture to suitable ground in accordance with local electrical codes.
- 6 Connect the white driver wire to the neutral power line wire with a wire nut.
- 7 Connect the black driver wire to the hot power line wire with a wire nut.
- 8 Properly place the driver, all wires, and wire nut connections into the electrical box. Install the mounting plate onto the electrical box with the two #8-32 screws provided and secure it with anchor screws and washers.
- 9 Connect the black driver wire to the black fixture wire with a wire nut.
- 10 Connect the red driver wire to the red fixture wire with a wire nut.
- 11 Mount the fixture base onto the mounting plate and secure in place using the fixture screws.
- 12 Screw the shades onto the sockets.