

# ASPEN WEDGE 15 WALL SCONCE



The Aspen Wedge outdoor wall sconce creates a tapered rectilinear column of beautifully diffused light that can be mounted with the wedge angled up or down. The Aspen Wedge is available in four sizes (8", 15", 26", 36") to meet architectural scale; ideal for way-finding and general outdoor illumination. The Aspen Wedge features energy-efficient, fully dimmable integrated LED lighting. Available in two finishes: Bronze and Charcoal.

## High quality LM80-tested LEDs

for consistent long-life performance and color

## Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing
- IP-65 Rated

## SPECIFICATIONS

|                       |   |
|-----------------------|---|
| DELIVERED LUMENS      | 648   |
| WATTS                 | 22  |
| VOLTAGE               | Universal 120-277V, with integral transient 2.5kV surge protection (driver)   |
| DIMMING               | 0-10, ELV   |
| LIGHT DISTRIBUTION    | Symmetric   |
| MOUNTING OPTIONS      | Wall  |
| PERFORMANCE OPTIONS   | In-Line Fuse / Surge Protector  |
| CCT                   | 2700K, 3000K  |
| CRI                   | 90+   |
| COLOR BINNING         | 3 Step  |
| BUG RATING            | B0-U3-G1  |
| DARK SKY              | Non-compliant   |
| WET LISTED            | IP65  |
| GENERAL LISTING       | ETL   |
| CALIFORNIA TITLE 24   | Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required. |
| START TEMP            | -30°C   |
| FIELD SERVICEABLE LED | Yes   |
| CONSTRUCTION          | Aluminum  |
| HARDWARE              | Stainless Steel   |
| FINISH                | Marine Grade Powder Coat  |
| LED LIFETIME          | L70; 70,000 Hours   |
| WARRANTY*             | 5 Years   |

\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.



ASPEN WEDGE 15  
shown in black




ASPEN WEDGE 15  
shown in black

## ORDERING INFORMATION

| 7000WASPW | CRI / CCT     | LENGTH  | LENS      | FINISH     | VOLTAGE                 | DISTRIBUTION | OPTIONS                              |
|-----------|---------------|---------|-----------|------------|-------------------------|--------------|--------------------------------------|
| 927       | 90 CRI, 2700K | 15" 15" | D DIFFUSE | Z BRONZE   | UNV 120V-277V UNIVERSAL | S SYMMETRIC  | NONE                                 |
| 930       | 90 CRI, 3000K |         |           | H CHARCOAL |                         |              | LF IN-LINE FUSE                      |
|           |               |         |           |            |                         |              | SP SURGE PROTECTION                  |
|           |               |         |           |            |                         |              | LFSP IN-LINE FUSE & SURGE PROTECTION |

# ASPEN WEDGE 15 WALL SCONCE




Aspen Wedge 15

## PHOTOMETRICS\*

\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)

### ASPEN WEDGE 15

Total Lumen Output: 648  
 Total Power: 22  
 Luminaire Efficacy: 29  
 Color Temp: 3000K  
 CRI: 90  
 BUG Rating: B0-U3-G1

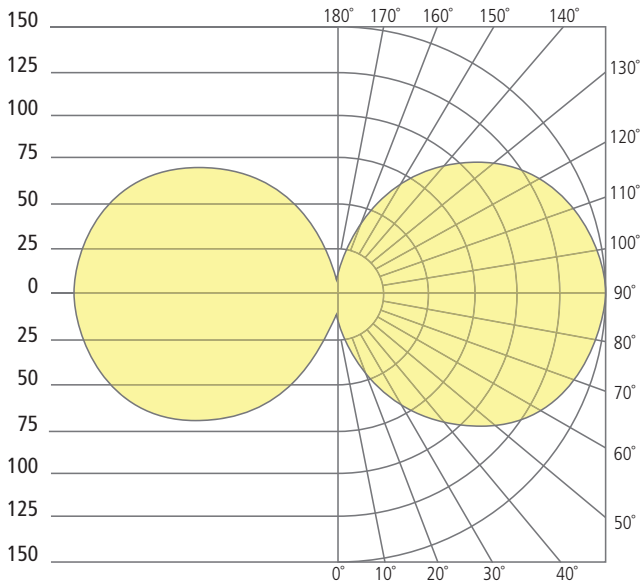

## PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

---



---



---



---



---



---



GENERATION BRANDS  
 7400 Linder Avenue, Skokie, Illinois 60077

T 847.410.4400 F 847.410.4500



© 2017 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.