

ASPEN WEDGE 8 WALL SCONCE



The Aspen Wedge outdoor wall sconce creates a tapered rectilinear column of beautifully diffused light that can be mounted with the wedge angled up or down. The Aspen Wedge is available in four sizes (8", 15", 26", 36") to meet architectural scale; ideal for way-finding and general outdoor illumination. The Aspen Wedge features energy-efficient, fully dimmable integrated LED lighting. Available in two finishes: Bronze and Charcoal.

High quality LM80-tested LEDs

for consistent long-life performance and color

Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing
- IP-65 Rated

SPECIFICATIONS

DELIVERED LUMENS	390
WATTS	15
VOLTAGE	Universal 120-277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Wall
PERFORMANCE OPTIONS	In-Line Fuse / Surge Protector
CCT	2700K, 3000K
CRI	90+
COLOR BINNING	3 Step
BUG RATING	B0-U3-G1
DARK SKY	Non-compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years
WEIGHT	3 lbs.

* Visit techlighting.com for specific warranty limitations and details.



ASPEN WEDGE 8
shown in charcoal




ASPEN WEDGE 8
shown in bronze

ORDERING INFORMATION

7000WASPW	CRI / CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
927	90 CRI, 2700K	8 8"	D DIFFUSE	Z BRONZE	UNV 120V-277V UNIVERSAL	S SYMMETRIC	NONE
930	90 CRI, 3000K			H CHARCOAL			LF IN-LINE FUSE
							SP SURGE PROTECTION
							LFSP IN-LINE FUSE & SURGE PROTECTION

ASPEN WEDGE 8 WALL SCONCE




Aspen Wedge 8

PHOTOMETRICS*

*For latest photometrics, please visit www.techlighting.com/OUTDOOR

ASPEN WEDGE 8

Total Lumen Output: 390
 Total Power: 15
 Luminaire Efficacy: 26
 Color Temp: 3000K
 CRI: 90
 BUG Rating: B0-U3-G1

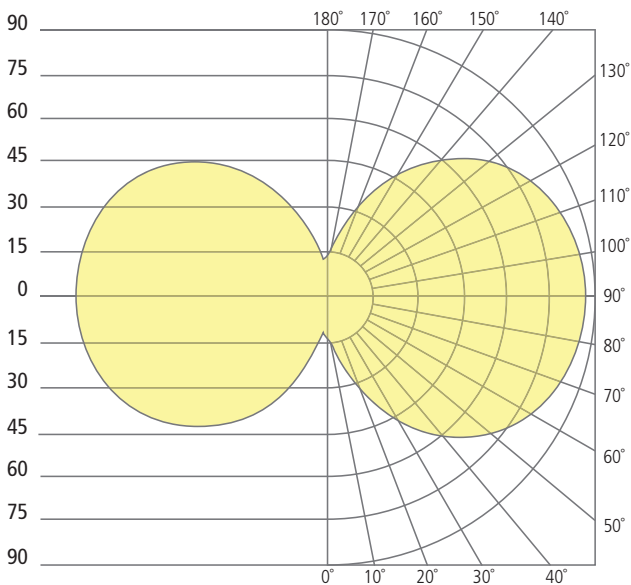

PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES



© 2017 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.



GENERATION BRANDS
 7400 Linder Avenue, Skokie, Illinois 60077

T 847.410.4400 F 847.410.4500