


LOW - VOLTAGE HEADS

Burk Head LED T20

DESCRIPTION

The Burk display head by Tech Lighting combines design simplicity with practical technology. Inspired by telephoto camera lens this simple display head houses a powerful LED source harnessed by field changeable optics for the most precise beam control. The Burk head is highly customizable featuring a plethora of finishes, beam spreads, lamping and stem lengths. Further customize the Burk head by combining it with any complementary Tech Lighting free-jack or rail system. This low-voltage display head is ideal for commercial lighting applications such as retail stores, libraries and galleries. The Burk ships with your choice of 20° or 35° field changeable optics or integrated lens holders (both sold separately). Includes field replaceable 12 watt, 740 delivered lumen, 2700K, 3000K or 3500K field replaceable LED module. Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer). Choice of 20° or 35° field changeable optics. Integrated lens holder accommodates up to two MR16 sized lenses or louvers (sold separately). As a general rule when using the Burk head, we do not recommend using greater than 33% of the maximum wattage specified for the low voltage transformer due to inrush current requirements. For assistance in calculations, please contact Technical Support.

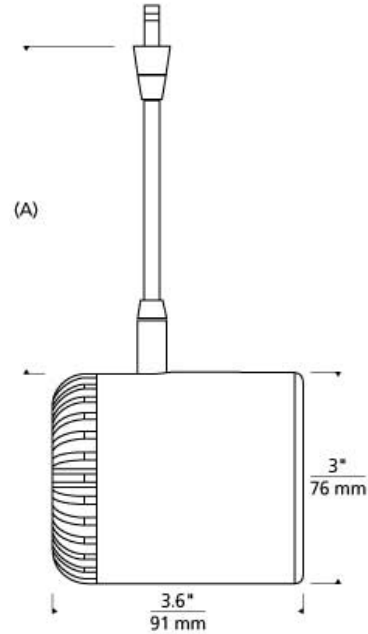

INSTALLATION

Socket terminates with FreeJack male connector, which may be installed into a system connector. Elements ordered with a system prefix include a connector for that system. For use on T-TRAK, order FreeJack version and T-TRAK FreeJack Connector (sold separately).

ACCESSORIES & OPTICAL CONTROLS

Eggcrate Louver



antique bronze / antique bronze black / satin nickel brown chestnut / antique bronze satin nickel / satin nickel weathered gray oak / satin nickel white / satin nickel white ash / satin nickel aged brass / aged brass

ORDERING INFORMATION

700	SYSTEM	BRK	CRI	COLOR TEMP	BEAM SPREAD	LENGTH (A)	FINISH	LAMP	
FJ	FREEJACK		8	80 CRI	27	2700K	20 20°	03 3"	R AGED BRASS
MP	MONOPOINT		9	90 CRI	30	3000K	35 35°	06 6"	Z ANTIQUE BRONZE
MO	MONORAIL				35	3500K		12 12"	B BLACK
MO2	TWO-CIRCUIT MONORAIL								NZBROWN CHESTNUT/ANTIQU BRONZE
									NSBROWN CHESTNUT/SATIN NICKEL
									S SATIN NICKEL
									YZ WEATHERED GRAY OAK/ANTIQU BRONZE
									YS WEATHERED GRAY OAK/SATIN NICKEL
									W WHITE
									AZ WHITE ASH/ANTIQU BRONZE
									AS WHITE ASH/SATIN NICKEL

Note: MP includes 4 Round Flush Canopy.

When installing LED option on MO2 only magnetic transformers may be used.



700

FIXTURE _____

TYPE: _____

JOB NAME: _____

NOTES: _____

