

LOW - VOLTAGE HEADS

Cam Head

DESCRIPTION


Clean-lined head rotates 360° around stem; pivots 340°. Low-voltage, MR16 lamp of up to 75 watts (not included). Works with SORAA.

INSTALLATION

Socket terminates with FreeJack male connector, which may be installed into a system connector. Elements ordered with a system prefix include a connector for that system. For use on T~TRAK, order FreeJack version and T~TRAK FreeJack Connector (sold separately).

WEIGHT

0.26-0.86lb / 0.12-0.39kg ±

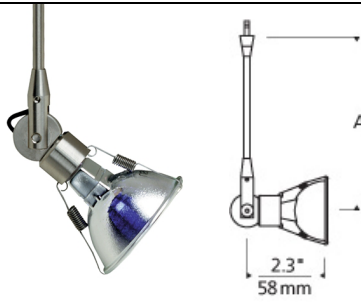

cam head

ORDERING INFORMATION

700 SYSTEM	CAM	LENGTH (A)	FINISH
FJ	FREEJACK	03 3"	C CHROME
MP	MONOPOINT	06 6"	S SATIN NICKEL
MO	MONORAIL	12 12"	
MO2	TWO-CIRCUIT MONORAIL		
WMO	WALL MONORAIL		

Note: MP includes 4" Round Flush Canopy.



TECH LIGHTING®
 7400 Linder Avenue T 847.410.4400
 Skokie, Illinois 60077 F 847.410.4500
Tech Lighting, L.L.C.

700 ____ CAM ____ ____

FIXTURE TYPE: _____

JOB NAME: _____

NOTES: _____



©2017 Tech Lighting, L.L.C. All Rights Reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.