

LOW - VOLTAGE HEADS

Cam Head

DESCRIPTION


Clean-lined head rotates 360° around stem; pivots 90°. Low-voltage, MR16 lamp of up to 75 watts (not included).

INSTALLATION

Socket terminates with FreeJack male connector, which may be installed into a system connector. Elements ordered with a system prefix include a connector for that system. For use on T-TRAK, order FreeJack version and T-TRAK FreeJack Connector (sold separately).

WEIGHT

0.26-0.86lb / 0.12-0.39kg ±

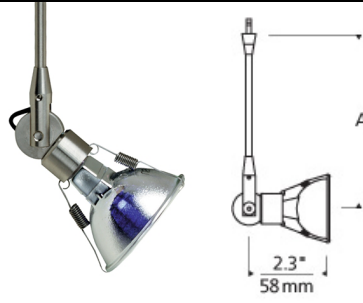

cam head

ORDERING INFORMATION

| 700 SYSTEM | CAM | LENGTH (A) | FINISH |
|------------|----------------------|------------|----------------|
| FJ | FREEJACK | 02 2" | C CHROME |
| MP | MONOPOINT | 06 6" | S SATIN NICKEL |
| MO | MONORAIL | 12 12" | |
| MO2 | TWO-CIRCUIT MONORAIL | | |
| WMO | WALL MONORAIL | | |

Note: MP includes 4" Round Flush Canopy.



TECH LIGHTING®
 7400 Linder Avenue T 847.410.4400
 Skokie, Illinois 60077 F 847.410.4500

Tech Lighting, L.L.C.

700 ____ CAM ____ ____

FIXTURE TYPE: _____

JOB NAME: _____

NOTES: _____



©2017 Tech Lighting, L.L.C. All Rights Reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.