

Strikingly elegant in its simplicity, an unembellished tubular wall sconce design creates a modern industrial look while producing abundant up and down lighting for indoor or outdoor illumination. Also available with down light only.

Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

SPECIFICATIONS

DELIVERED LUMENS	1078
WATTS	11.8
VOLTAGE	Universal 120-277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV, TRIAC
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Wall (Up or Down)
CCT	3000K
CRI	90+
COLOR BINNING	3-Step
BUG RATING	N/A
DARK SKY	Non-compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years
WEIGHT	4 lbs.

* Visit techlighting.com for specific warranty limitations and details.



CHARA 26 WALL
shown in black




CHARA 26 WALL
shown in satin nickel

ORDERING INFORMATION

7000WCHA	CRI/CCT	LENGTH	FINISH	FUNCTION	VOLTAGE	DISTRIBUTION
	930 90 CRI, 3000K	26 26"	B BLACK S SATIN NICKEL	UD UPLIGHT/DOWNLIGHT	UNV 120V-277V	S SYMMETRIC

CHARA 26 WALL SCONCE

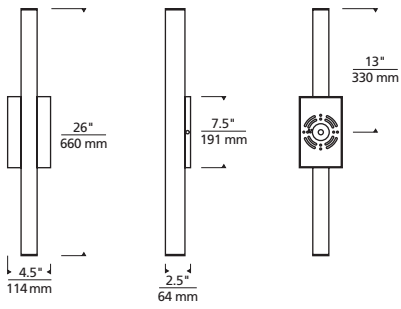

Chara Sconce

PHOTOMETRICS*

*For latest photometrics, please visit www.techlighting.com/OUTDOOR

CHARA WALL

Total Lumen Output:	1078
Total Power:	11.8
Luminaire Efficacy:	91
Color Temp:	3000K
CRI:	90
BUG Rating:	N/A

PROJECT INFO

FIXTURE TYPE & QUANTITY	JOB NAME & INFO	NOTES



GENERATION BRANDS
7400 Linder Avenue, Skokie, Illinois 60077
T 847.410.4400 F 847.410.4500



© 2018 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.