

# LOW-VOLTAGE PENDANTS

## Coronado Pendant



### DESCRIPTION

Rectangular onyx shade with metal frame. Includes low-voltage, 35 watt halogen bi-pin lamp or 8 watt replaceable 500 lumen 80 CRI 3000K LED SORAA® module and six feet of field-cutttable suspension cable. Works with SORAA.

### INSTALLATION


Socket terminates with FreeJack male connector, which may be installed into a system connector. Elements ordered with a system prefix include a connector for that system. For For Kable Lite due to weight.

### ACCESSORIES & OPTICAL CONTROLS

SORAA® LED Bi-Pin Replacement Pendant Module, Swag Hook

### WEIGHT

3.06lb / 1.39kg ±

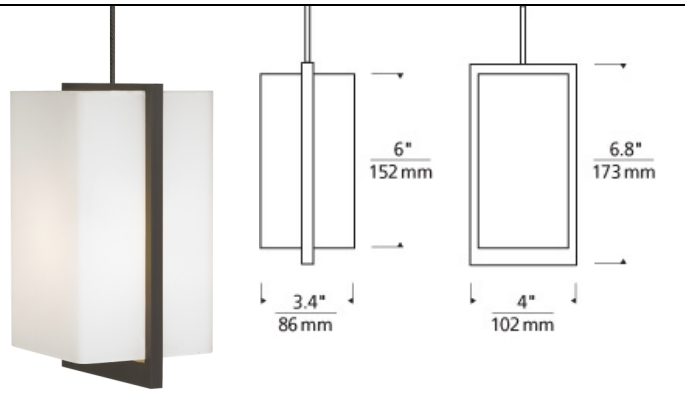

onyx



onyx



white glass

### ORDERING INFORMATION

700	SYSTEM	COR	COLOR	FINISH	LAMP
FJ	FREEJACK		H ONYX	Z ANTIQUE BRONZE	12 VOLT HALOGEN
MP	MONOPOINT		W WHITE GLASS	S SATIN NICKEL	-LEDS830 12 VOLT LED 80 CRI 3000K
MO	MONORAIL				-24 24 VOLT HALOGEN
MO2	TWO-CIRCUIT MONORAIL				

Note: MP includes 4" Round Canopy  
When installing LED option on MO2 only magnetic transformers may be used.



**TECH LIGHTING®**  
7400 Linder Avenue T 847.410.4400  
Skokie, Illinois 60077 F 847.410.4500  
**Tech Lighting, L.L.C.**

700 \_\_\_\_ COR \_\_\_\_

FIXTURE TYPE: \_\_\_\_\_

JOB NAME: \_\_\_\_\_

NOTES: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_



©2017 Tech Lighting, L.L.C. All Rights Reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C.  
Tech Lighting reserves the right to change specifications for product improvements without notification.