

Classically elegant with contemporary cylindrical design, the Gage wall sconce creates a wide dispersion of soft LED up and down light to create both accent and ambient outdoor lighting. Mounting options enable the fixture to be mounted in three different height positions relative to the back plate to meet a variety of installation needs and aesthetic preferences.

### High quality LM80-tested LEDs

for consistent long-life performance and color

### Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

### Three-position mounting option allows

variable height adjustment to back plate (See page 2 for illustrations)

## SPECIFICATIONS

DELIVERED LUMENS	1480
WATTS	29.6
VOLTAGE	Universal 120V-277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	3-Position Variable Wall Height
PERFORMANCE OPTIONS	Photocontrol / In-Line Fuse / Surge Protector
CCT	3000K or 4000K
CRI	80+
COLOR BINNING	3 Step
BUG RATING	B1-U4-G1
DARK SKY	Non-Compliant
WET LISTED	IP65
GENERAL LISTING	ETL, Title 24
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years

\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.




GAGE 20  
shown in bronze

GAGE 20  
shown in charcoal

## ORDERING INFORMATION

7000WGAG	CRI/CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
	830 80 CRI, 3000K	20 20"	D DIFFUSE	Z BRONZE	UNV 120V-277V	S SYMMETRIC	NONE
	840 80 CRI, 4000K			H CHARCOAL			PC BUTTON PHOTOCONTROL
							LF IN-LINE FUSE
							SP SURGE PROTECTION
							PCLF BUTTON PHOTOCONTROL & IN-LINE FUSE
							PCSP BUTTON PHOTOCONTROL & SURGE PROTECTION
							LFSP IN-LINE FUSE & SURGE PROTECTION
							PCLFSP BUTTON PHOTOCONTROL, IN-LINE FUSE & SURGE PROTECTION

# GAGE 20 WALL SCNCE

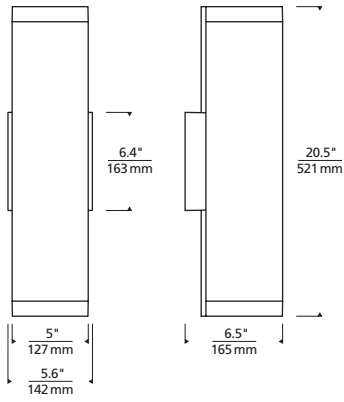

Gage 20




Integrated height adjustment system allows you to customize the fixture position. Low, Mid, or High.

## PHOTOMETRICS\*

\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)

### GAGE 20

- Total Lumen Output: 1480
- Total Power: 29.6
- Luminaire Efficacy: 49.9
- Color Temp: 3000K
- CRI: 80+
- BUG Rating: B1-U4-G1

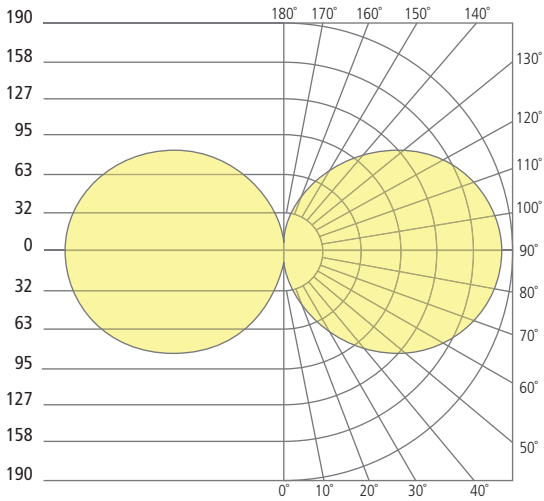

## PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

---



---



---



---



---



---



© 2016 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.



GENERATION BRANDS  
7400 Linder Avenue, Skokie, Illinois 60077  
T 847.410.4400 F 847.410.4500