

Classically elegant with contemporary cylindrical design, the Gage wall sconce creates a wide dispersion of soft LED up and down light to create both accent and ambient outdoor lighting.

High quality LM80-tested LEDs

for consistent long-life performance and color

Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

SPECIFICATIONS

| | |
|-----------------------|--|
| DELIVERED LUMENS | 464.5 |
| WATTS | 15.5 |
| VOLTAGE | Universal 120V-277V, with integral transient 2.5kV surge protection (driver) |
| DIMMING | 0-10, ELV |
| LIGHT DISTRIBUTION | Symmetric |
| MOUNTING OPTIONS | Wall |
| PERFORMANCE OPTIONS | Photocontrol / In-Line Fuse / Surge Protector |
| CCT | 3000K or 4000K |
| CRI | 80+ |
| COLOR BINNING | 3 Step |
| BUG RATING | B0-U3-G1 |
| DARK SKY | Non-Compliant |
| WET LISTED | IP65 |
| GENERAL LISTING | ETL, Title 24 |
| START TEMP | -30°C |
| FIELD SERVICEABLE LED | Yes |
| CONSTRUCTION | Aluminum |
| HARDWARE | Stainless Steel |
| FINISH | Marine Grade Powder Coat |
| LED LIFETIME | L70; 70,000 Hours |
| WARRANTY* | 5 Years |

* Visit techlighting.com for specific warranty limitations and details.




GAGE 8
shown in bronze



GAGE 8
shown in charcoal

ORDERING INFORMATION

| 7000WGAG | CRI/CCT | LENGTH | LENS | FINISH | VOLTAGE | DISTRIBUTION | OPTIONS |
|----------|--|--------|-----------|------------------------|---------------|--------------|---|
| | 830 80 CRI, 3000K 840 80 CRI, 4000K | 8 8" | D DIFFUSE | Z BRONZE H CHARCOAL | UNV 120V-277V | S SYMMETRIC | NONE PC BUTTON PHOTOCONTROL LF IN-LINE FUSE SP SURGE PROTECTION PCLF BUTTON PHOTOCONTROL & IN-LINE FUSE PCSP BUTTON PHOTOCONTROL & SURGE PROTECTION LFSP IN-LINE FUSE & SURGE PROTECTION PCLFSP BUTTON PHOTOCONTROL, IN-LINE FUSE & SURGE PROTECTION |




Gage 8

PHOTOMETRICS*

*For latest photometrics, please visit www.techlighting.com/OUTDOOR

GAGE 8

Total Lumen Output: 464.5
 Total Power: 15.5
 Luminaire Efficacy: 29.8
 Color Temp: 3000K
 CRI: 80+
 BUG Rating: B0-U3-G1

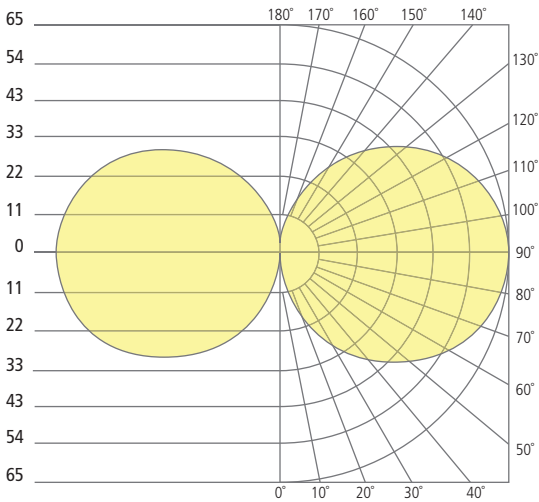

PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES
