

Classically elegant with contemporary cylindrical design, the Gage wall sconce creates a wide dispersion of soft LED up and down light to create both accent and ambient outdoor lighting.

High quality LM80-tested LEDs

for consistent long-life performance and color

Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

SPECIFICATIONS

DELIVERED LUMENS	464.5
WATTS	15.5
VOLTAGE	Universal 120V-277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Wall
PERFORMANCE OPTIONS	In-Line Fuse / Surge Protector
CCT	3000K or 4000K
CRI	80+
COLOR BINNING	3 Step
BUG RATING	B0-U3-G1
DARK SKY	Non-Compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years

* Visit techlighting.com for specific warranty limitations and details.




GAGE 8
shown in bronze



GAGE 8
shown in charcoal

ORDERING INFORMATION

7000WGAG	CRI/CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
	830 80 CRI, 3000K 840 80 CRI, 4000K	8 8"	D DIFFUSE	Z BRONZE H CHARCOAL	UNV 120V-277V	S SYMMETRIC	NONE LF IN-LINE FUSE SP SURGE PROTECTION LFSP IN-LINE FUSE & SURGE PROTECTION




Gage 8

PHOTOMETRICS*

*For latest photometrics, please visit www.techlighting.com/OUTDOOR

GAGE 8

Total Lumen Output: 464.5
 Total Power: 15.5
 Luminaire Efficacy: 29.8
 Color Temp: 3000K
 CRI: 80+
 BUG Rating: B0-U3-G1

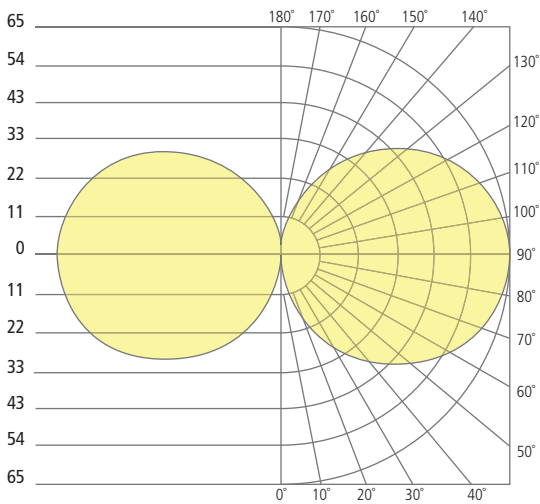

PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES
