

LINEAR SUSPENSION



GATICA LED Linear Suspension

For a truly minimalist profile without compromising light output, the GATICA Linear Suspension offers undeniable design flexibility with state-of-the-art LED light guide performance to match. GATICA light guide technology creates uniform light output and color across the down light surface while completely eliminating pixilation. Only 6 inches wide and featuring an ultra slim 1.3-inch profile, the GATICA linear suspension is available in 4-foot and 8-foot lengths and includes all required installation hardware.

CONSTRUCTION Aluminum construction. Utilizes tightly pitched LEDs and light-guide technology to optimize optical performance.

FINISH Standard powder coat white finish.

OUTPUT* Suspension panels available: 100% direct or multiple direct/indirect. 900 lms/ft, consuming 11 watts/ft. Variable direct/indirect distribution selection via a 0-10v wall control. Regardless of direct/indirect distribution, panel maintains the same wattage consumption and full dimmability. Note: Direct and Indirect distributions dim together. Patent-pending light distribution control system is easily accessible and can be set (bypassing the 0-10v wall control) using a rotary dial to select any preset distributions: (% direct/ % indirect) 80/20, 70/30, 60/40, 50/50, or 25/75. See instruction sheet for details.

SUSPENSION MOUNTING Adjustable aircraft cable (144" adjustable).


LED 3000K or 3500K (90+ CRI)

DIMMING All panels dim via 0-10v control. Each 4' panel has a Maximum Sink Current of 1.2mA, each 8' panel has a Maximum Sink Current of 2.4mA. Please verify the current rating of the specified dimmers to avoid overloading.


DRIVER Universal 120/277v driver. Driver efficiency is 83.4% and Power Factor is .99.

POWER Power Feed Kit (included) comes with 144" of field adjustable cable.

*At 3500K; visit www.techlighting.com/GATICA for full photometrics.

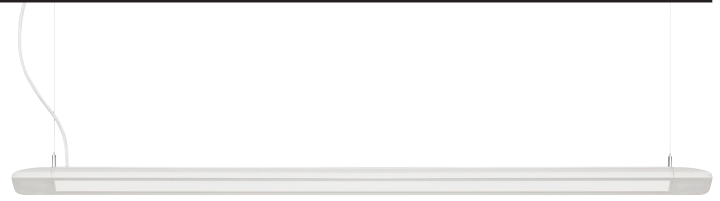

LENGTH (A)
4ft | 51.2" / 1301mm
8ft | 96.5" / 2452mm

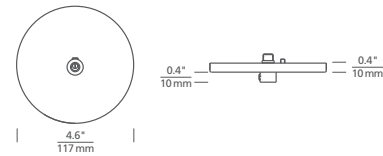

ORDERING INFORMATION

| 700LSGATS | CRI/COLOR TEMPERATURE | LENGTH | FINISH | OUTPUT | CONTROLS | DISTRIBUTION | MOUNTING |
|-----------|-----------------------|--------|---------|---------------|----------|--|----------------------------|
| 930 | 90+ CRI 3000K | 04 4FT | W WHITE | A2 900 LMS/FT | 0 0-10V | 0 0-10V CONTROL OF DIRECT/INDIRECT MIX | SA12 144" ADJUSTABLE CABLE |
| 935 | 90+ CRI 3500K | 08 8FT | | | | 1 100% DIRECT (NOT ADJUSTABLE) | |



TECH LIGHTING®

7400 Linder Avenue T 847.410.4400
Skokie, Illinois 60077 F 847.410.4500

www.techlighting.com

FIXTURE TYPE: _____

JOB NAME: _____

NOTES: _____

