

KONIAL 17 DIFFUSE WALL SCNCE



Contemporary architectural geometry manifests in the triangular, conical shape of the Konial outdoor wall sconce. With generous openings at the top and bottom, this sconce creates soft up and down LED lighting. The shade is a translucent white acrylic for ambient illumination.

High quality LM80-tested LEDs

for consistent long-life performance and color

Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

SPECIFICATIONS

DELIVERED LUMENS	1330
WATTS	29.1
VOLTAGE	Universal 120V-277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Wall
PERFORMANCE OPTIONS	Photocontrol / In-Line Fuse / Surge Protector
CCT	3000K or 4000K
CRI	80+
COLOR BINNING	3 Step
BUG RATING	B0-U4-G1
DARK SKY	Non-Compliant
WET LISTED	IP65
GENERAL LISTING	ETL, Title 24
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years

* Visit techlighting.com for specific warranty limitation and details.



KONIAL 17
shown with diffuse
shade, bronze


KONIAL 17
shown with diffuse
shade, gray

KONIAL 17
shown with diffuse
shade, charcoal

ORDERING INFORMATION

7000WKON	CRI/CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
	830 80 CRI, 3000K	17 17"	D DIFFUSE	Z BRONZE	120 120V	S SYMMETRIC	NONE
	840 80 CRI, 4000K			Y GRAY	277 277V		PC BUTTON PHOTOCONTROL
				H CHARCOAL			LF IN-LINE FUSE
							SP SURGE PROTECTION
							PCLF BUTTON PHOTOCONTROL & IN-LINE FUSE
							PCSP BUTTON PHOTOCONTROL & SURGE PROTECTION
							LFSP IN-LINE FUSE & SURGE PROTECTION
							PCLFSP BUTTON PHOTOCONTROL, IN-LINE FUSE & SURGE PROTECTION

KONIAL 17 DIFFUSE WALL SCONCE




Konial 17

PHOTOMETRICS*

*For latest photometrics, please visit www.techlighting.com/OUTDOOR

KONIAL 17 DIFFUSE

Total Lumen Output: 1330
 Total Power: 29.1
 Luminaire Efficacy: 45.7
 Color Temp: 4000K
 CRI: 80+
 BUG Rating: B0-U4-G1

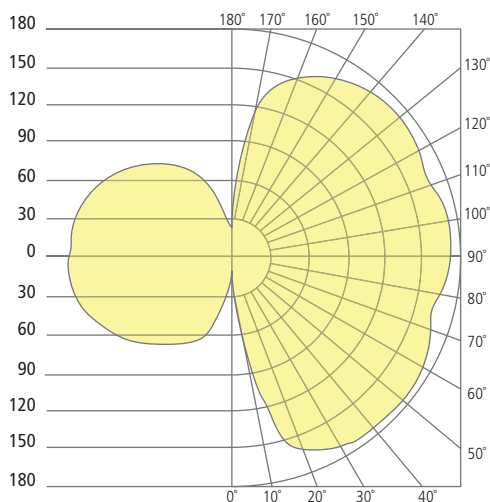

PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES



© 2016 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.



GENERATION BRANDS
 7400 Linder Avenue, Skokie, Illinois 60077
 T 847.410.4400 F 847.410.4500

Contemporary architectural geometry manifests in the triangular, conical shape of the Konial outdoor wall sconce. With generous openings at the top and bottom, this sconce creates soft up and down LED lighting. The shade is opaque metal that creates directional, up and down accent lighting.

High quality LM80-tested LEDs

for consistent long-life performance and color

Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

SPECIFICATIONS

DELIVERED LUMENS	2315
WATTS	29.5
VOLTAGE	Universal 120V-277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Wall
PERFORMANCE OPTIONS	Photocontrol / In-Line Fuse / Surge Protector
CCT	3000K or 4000K
CRI	80+
COLOR BINNING	3 Step
BUG RATING	B1-U5-G0
DARK SKY	Non-Compliant
WET LISTED	IP65
GENERAL LISTING	ETL, Title 24
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years

* Visit techlighting.com for specific warranty limitations and details.



KONIAL 17
shown in metal, bronze



KONIAL 17
shown in metal, gray




KONIAL 17
shown in metal, charcoal

ORDERING INFORMATION

7000WKON	CRI/CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
	830 80 CRI, 3000K	17 17"	M METAL	Z BRONZE	120 120V	S SYMMETRIC	NONE
	840 80 CRI, 4000K			Y GRAY	277 277V		PC BUTTON PHOTOCONTROL
				H CHARCOAL			LF IN-LINE FUSE
							SP SURGE PROTECTION
							PCLF BUTTON PHOTOCONTROL & IN-LINE FUSE
							PCSP BUTTON PHOTOCONTROL & SURGE PROTECTION
							LFSP IN-LINE FUSE & SURGE PROTECTION
							PCLFSP BUTTON PHOTOCONTROL, IN-LINE FUSE & SURGE PROTECTION

KONIAL 17 METAL WALL SCONCE




Konial 17

PHOTOMETRICS*

*For latest photometrics, please visit www.techlighting.com/OUTDOOR

KONIAL 17 METAL

Total Lumen Output: 2315
 Total Power: 29.5
 Luminaire Efficacy: 75.7
 Color Temp: 3000K
 CRI: 80+
 BUG Rating: B1-U5-G0

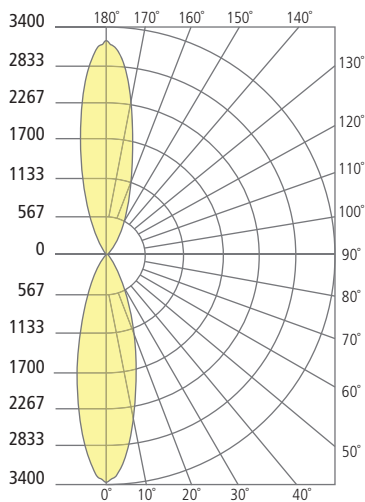

PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES



GENERATION BRANDS

7400 Linder Avenue, Skokie, Illinois 60077

T 847.410.4400 F 847.410.4500



© 2016 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.