

# KONIAL 5 DIFFUSE WALL SCONCE



Contemporary architectural geometry manifests in the triangular, conical shape of the Konial outdoor wall sconce. With generous openings at the top and bottom, this sconce creates soft up and down LED lighting. The shade is a translucent white acrylic for ambient illumination.

## High quality LM80-tested LEDs

for consistent long-life performance and color

## Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

## SPECIFICATIONS

DELIVERED LUMENS	525
WATTS	12.9
VOLTAGE	120V, 277V
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Wall
PERFORMANCE OPTIONS	In-Line Fuse
CCT	3000K or 4000K
CRI	80+
COLOR BINNING	3 Step
BUG RATING	B0-U3-G1
DARK SKY	Non-Compliant
WET LISTED	IP65
GENERAL LISTING	ETL, Title 24
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years

\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.



**KONIAL 5**  
shown with diffuse shade, bronze



**KONIAL 5**  
shown with diffuse shade, gray




**KONIAL 5**  
shown with diffuse shade, charcoal

## ORDERING INFORMATION

7000WKON	CRI/CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
830	80 CRI, 3000K	5 5"	D DIFFUSE	Z BRONZE	120 120V	S SYMMETRIC	NONE
840	80 CRI, 4000K			Y GRAY	277 277V		LF IN-LINE FUSE
				H CHARCOAL			

# KONIAL 5 DIFFUSE WALL SCONCE




Konial 5

## PHOTOMETRICS\*

\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)

### KONIAL 5 DIFFUSE

Total Lumen Output: 525  
 Total Power: 12.9  
 Luminaire Efficacy: 40.5  
 Color Temp: 4000K  
 CRI: 80+  
 BUG Rating: B0-U3-G1

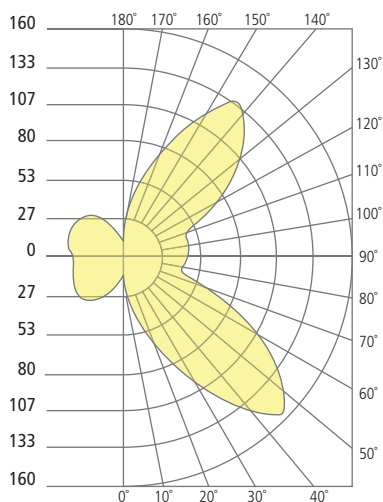

## PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

---



---



---



---



---



---



© 2016 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.



GENERATION BRANDS  
 7400 Linder Avenue, Skokie, Illinois 60077  
 T 847.410.4400 F 847.410.4500

Contemporary architectural geometry manifests in the triangular, conical shape of the Konial outdoor wall sconce. With generous openings at the top and bottom, this sconce creates soft up and down LED lighting. The shade is opaque metal that creates directional, up and down accent lighting.

### High quality LM80-tested LEDs

for consistent long-life performance and color

### Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

## SPECIFICATIONS

DELIVERED LUMENS	198.3
WATTS	12.7
VOLTAGE	120V, 277V
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric / Up-Downlight
MOUNTING OPTIONS	Wall
PERFORMANCE OPTIONS	In-Line Fuse
CCT	3000K or 4000K
CRI	80+
COLOR BINNING	3 Step
BUG RATING	B0-U3-G0
DARK SKY	Non-Compliant
WET LISTED	IP65
GENERAL LISTING	ETL, Title 24
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years

\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.



KONIAL 5  
shown with metal shade, bronze



KONIAL 5  
shown with metal shade, gray




KONIAL 5  
shown with metal shade, charcoal

## ORDERING INFORMATION

7000WKON	CRI/CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
	830 80 CRI, 3000K	5 5"	M METAL	Z BRONZE	120 120V	S SYMMETRIC	NONE
	840 80 CRI, 4000K			Y GRAY	277 277V	LF	IN-LINE FUSE
				H CHARCOAL			

# KONIAL 5 METAL WALL SCNCE




Konial 5

## PHOTOMETRICS\*

\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)

### KONIAL 5 METAL

Total Lumen Output: 198  
 Total Power: 12.7  
 Luminaire Efficacy: 15.5  
 Color Temp: 4000K  
 CRI: 80+  
 BUG Rating: B0-U3-G0

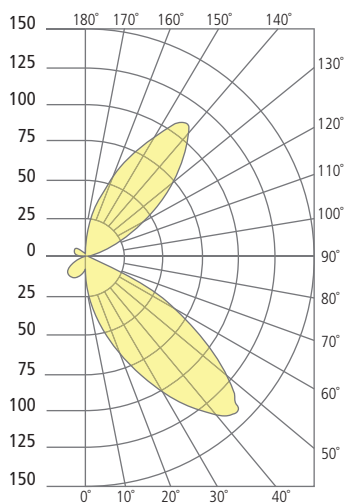

## PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

---



---



---



---



---



---



© 2016 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.



GENERATION BRANDS  
 7400 Linder Avenue, Skokie, Illinois 60077  
 T 847.410.4400 F 847.410.4500