

KONIAL 5 DIFFUSE WALL SCONCE



Contemporary architectural geometry manifests in the triangular, conical shape of the Konial outdoor wall sconce. With generous openings at the top and bottom, this sconce creates soft up and down LED lighting. The shade is a translucent white acrylic for ambient illumination.

High quality LM80-tested LEDs

for consistent long-life performance and color

Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

SPECIFICATIONS

DELIVERED LUMENS	525
WATTS	12.9
VOLTAGE	120V, 277V
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Wall
PERFORMANCE OPTIONS	In-Line Fuse
CCT	3000K or 4000K
CRI	80+
COLOR BINNING	3 Step
BUG RATING	B0-U3-G1
DARK SKY	Non-Compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years



KONIAL 5
shown with diffuse shade, bronze



KONIAL 5
shown with diffuse shade, gray




KONIAL 5
shown with diffuse shade, charcoal

* Visit techlighting.com for specific warranty limitations and details.

ORDERING INFORMATION

7000WKON	CRI/CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
	830 80 CRI, 3000K	5 5"	D DIFFUSE	Z BRONZE	120 120V	S SYMMETRIC	NONE
	840 80 CRI, 4000K			Y GRAY	277 277V		LF IN-LINE FUSE
				H CHARCOAL			

KONIAL 5 DIFFUSE WALL SCONCE

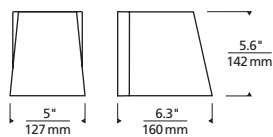


Konial 5

PHOTOMETRICS*

*For latest photometrics, please visit www.techlighting.com/OUTDOOR

KONIAL 5 DIFFUSE

Total Lumen Output: 525
 Total Power: 12.9
 Luminaire Efficacy: 40.5
 Color Temp: 4000K
 CRI: 80+
 BUG Rating: B0-U3-G1

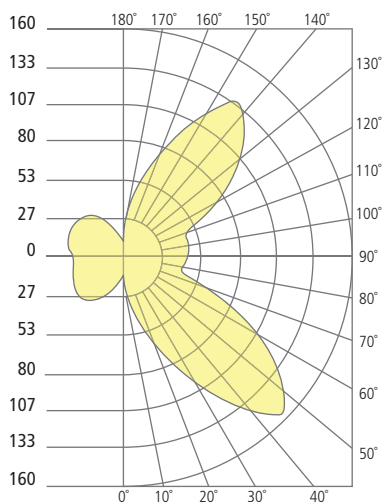

PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES



© 2016 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.



GENERATION BRANDS
 7400 Linder Avenue, Skokie, Illinois 60077
 T 847.410.4400 F 847.410.4500

Contemporary architectural geometry manifests in the triangular, conical shape of the Konial outdoor wall sconce. With generous openings at the top and bottom, this sconce creates soft up and down LED lighting. The shade is opaque metal that creates directional, up and down accent lighting.

High quality LM80-tested LEDs

for consistent long-life performance and color

Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

SPECIFICATIONS

DELIVERED LUMENS	198.3
WATTS	12.7
VOLTAGE	120V, 277V
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric / Up-Downlight
MOUNTING OPTIONS	Wall
PERFORMANCE OPTIONS	In-Line Fuse
CCT	3000K or 4000K
CRI	80+
COLOR BINNING	3 Step
BUG RATING	B0-U3-G0
DARK SKY	Non-Compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years

* Visit techlighting.com for specific warranty limitations and details.



KONIAL 5
shown with metal shade, bronze



KONIAL 5
shown with metal shade, gray




KONIAL 5
shown with metal shade, charcoal

ORDERING INFORMATION

7000WKON	CRI/CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
	830 80 CRI, 3000K	5 5"	M METAL	Z BRONZE	120 120V	S SYMMETRIC	NONE
	840 80 CRI, 4000K			Y GRAY	277 277V		LF IN-LINE FUSE
				H CHARCOAL			

KONIAL 5 METAL WALL SCENCE

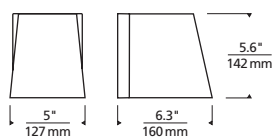


Konial 5

PHOTOMETRICS*

*For latest photometrics, please visit www.techlighting.com/OUTDOOR

KONIAL 5 METAL

Total Lumen Output: 198
 Total Power: 12.7
 Luminaire Efficacy: 15.5
 Color Temp: 4000K
 CRI: 80+
 BUG Rating: B0-U3-G0

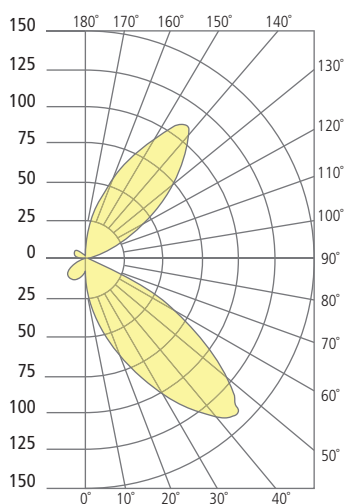

PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES



GENERATION BRANDS

7400 Linder Avenue, Skokie, Illinois 60077

T 847.410.4400 F 847.410.4500



© 2016 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.