

The epitome of minimalist, modern design the Leev wall sconce is composed of a single die-cast metal plane creased perfectly to aim LED up for architectural accent lighting, or down for ambient and way-finding illumination. Ideal for indoor or outdoor applications where a clean, yet dramatic aesthetic complements the space.

High quality LM80-tested LEDs

for consistent long-life performance and color

Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

Can be mounted for up lighting or down lighting

SPECIFICATIONS

DELIVERED LUMENS	235
WATTS	10
VOLTAGE	120V, 277V
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Downlight or Uplight
PERFORMANCE OPTIONS	In-Line Fuse
CCT	3000K or 4000K
CRI	80+
COLOR BINNING	3 Step
BUG RATING	Downlight: B0-U1-G0 Uplight: B0-U3-G0
DARK SKY	Compliant (Downlight)
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years

* Visit techlighting.com for specific warranty limitations and details.

ORDERING INFORMATION


7000WLEE	CRI/CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
830	80 CRI, 3000K	6 6"	D DIFFUSE	Z BRONZE	120 120V	S SYMMETRIC	NONE
840	80 CRI, 4000K			H CHARCOAL	277 277V	LF	IN-LINE FUSE



LEEV
shown in bronze



LEEV
shown in charcoal




Leev

PHOTOMETRICS*

*For latest photometrics, please visit www.techlighting.com/OUTDOOR

LEE V

Total Lumen Output: 235
 Total Power: 10
 Luminaire Efficacy: 23.4
 Color Temp: 3000K
 CRI: 80+
 BUG Rating: B0-U1-G0

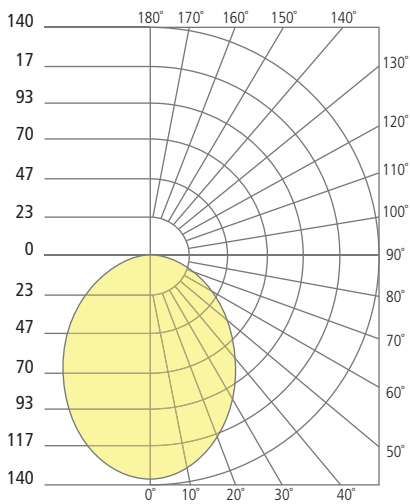

PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES
