


LOW - VOLTAGE PENDANTS

Melrose II Pendant



DESCRIPTION

The Melrose II pendant light from Tech Lighting features a graceful design with a cone shaped inner diffuser. This modestly sized contemporary pendant boasts an artisanal crafted shade that adds moderate stature and dramatic impact. The Melrose II scales at 8.8" in length and 7.3" in diameter making it ideal for dining room lighting, home office lighting and foyer lighting applications. To further compliment this contemporary styled pendant are three on trend color options along with three hardware finishes. The Melrose II ships with your choice of halogen or LED lamping, both options are fully dimmable to create the desired ambiance for your special space. Includes with 35 watt halogen bi-pin or 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module and six feet of field-cuttable cable. Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer). Works with SORAA.

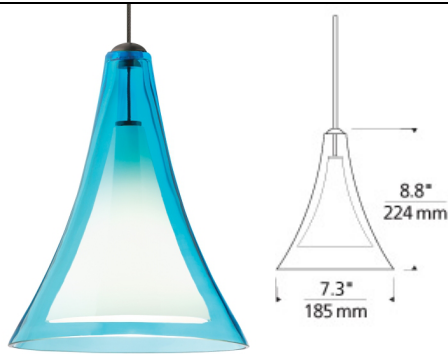

INSTALLATION

Socket terminates with FreeJack male connector, which may be installed into a system connector. Elements ordered with a system prefix include a connector for that system. For use on T-TRAK, order FreeJack version and T-TRAK FreeJack Connector (sold separately).

ACCESSORIES & OPTICAL CONTROLS

SORAA® LED Bi-Pin Replacement Pendant Module, Swag Hook



ORDERING INFORMATION

700	SYSTEM	MLP	COLOR	FINISH	LAMP
FJ	FREEJACK		Q AQUA	Z ANTIQUE BRONZE	12 VOLT HALOGEN (T20)
MP	MONOPOINT		C CLEAR	C CHROME	-LEDS930 12 VOLT LED 90 CRI 3000K (T20/T24)
MO	MONORAIL		K SMOKE	S SATIN NICKEL	-24 24 VOLT HALOGEN
MO2	TWO-CIRCUIT MONORAIL				

Note: MP includes 4" Round Flush Canopy.

Chrome not available on Monorail or Two-Circuit Monorail.



700 ____ MLP _____

FIXTURE TYPE: _____

JOB NAME: _____

NOTES: _____
