

The Mode Dual outdoor LED flood/accent light features a minimalist tubular profile with two powerful light sources, both with 185° tilt adjustment and 359° rotation for maximum aiming flexibility. Mode Dual allows accent and way-finding options in a stake- or bolt-mounted path fixture, ideal for illuminating monument signs or landscape features.

Mode features

- 185° tilt adjustment and 359° rotation for wide aiming flexibility
- Lockable
- Angle markers for consistent and precise aiming
- IP65 rated with marine-grade powder coat finishes
- Multiple stem lengths

SPECIFICATIONS

DELIVERED LUMENS	1560
WATTS	17.2
VOLTAGE	12V (Transformer sold separately)
DIMMING	MLV
LIGHT DISTRIBUTION	Symmetric
OPTICS	20°, 30°, 40°, and 60°
MOUNTING OPTIONS	Bolt or Stake
CCT	2700K, 3000K, 3500K or 4000K
CRI	90+
COLOR BINNING	3-Step
BUG RATING	B1-U0-G0 (20° Optic)
DARK SKY	Non-Compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 50,000 Hours
WARRANTY*	5 years

* Visit techlighting.com for specific warranty limitations and details.



MODE
shown in bronze



MODE
shown in charcoal

12V AC TRANSFORMERS*

(OUTDOOR RATED, ORDERED SEPARATELY)



ITEM	DESCRIPTION	HOUSING	DIMMING
7000T150T	MAGNETIC, 150W, 120V	STAINLESS STEEL	MAGNETIC
7000T150T277	MAGNETIC, 150W, 277V	STAINLESS STEEL	MAGNETIC
7000T300T	MAGNETIC, 300W, 120V	STAINLESS STEEL	MAGNETIC
7000T300T277	MAGNETIC, 300W, 277V	STAINLESS STEEL	MAGNETIC

ORDERING INFORMATION

7000AMDEA	CRI	COLOR TEMPERATURE	LENGTH (A)	WIDTH (B)	BEAM SPREAD	FINISH	INPUT VOLTAGE	OPTION
	9 90 CRI	27 2700K	4 4"	19 19"	20 20°	Z BRONZE	12 12 VOLT*	CONCRETE MOUNT
		30 3000K	8 8"	29 29"	30 30°	H CHARCOAL		ST STAKE MOUNT
		35 3500K	14 14"		40 40°			
		40 4000K	20 20"		60 60°			


*REQUIRES 12V REMOTE TRANSFORMER

MODE DUAL OUTDOOR PATH/FLOOD

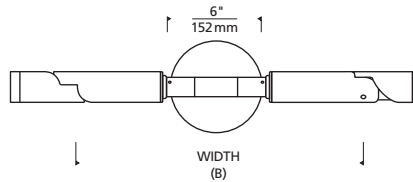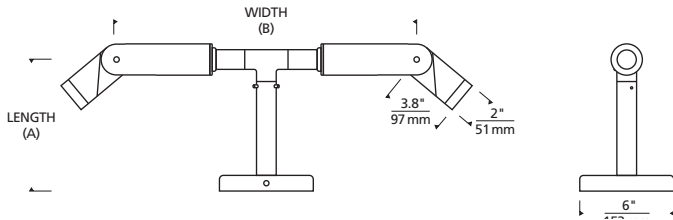

LENGTH (A)	WIDTH (B)
4 4.4"	19 19.2"
8 8.4"	29 29.2"
14 14.4"	
20 20.4"	

Mode Dual Path/Flood

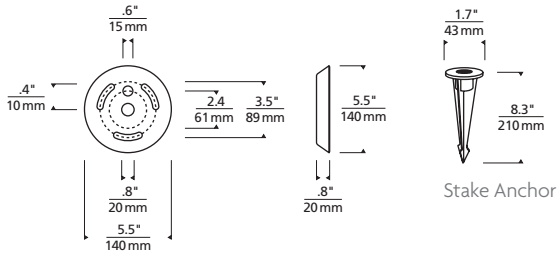


Anchor Plate Bolt Pattern

PHOTOMETRICS*

*For latest photometrics, please visit www.techlighting.com/OUTDOOR


MODE 20° DUAL

Total Lumen Output: 1304
 Total Power: 17.2
 Luminaire Efficacy: 76
 Color Temp: 3000K
 CRI: 90+
 BUG Rating: B1-U0-G0

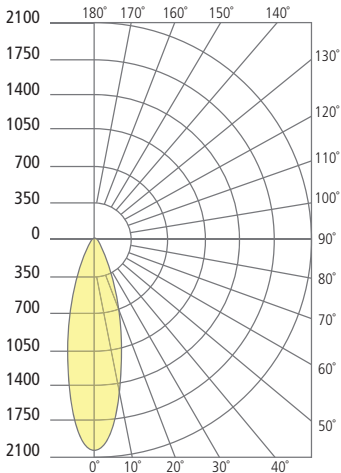


MODE 30° DUAL

Total Lumen Output: 1422
 Total Power: 17.2
 Luminaire Efficacy: 83
 Color Temp: 3000K
 CRI: 90+
 BUG Rating: B2-U0-G0

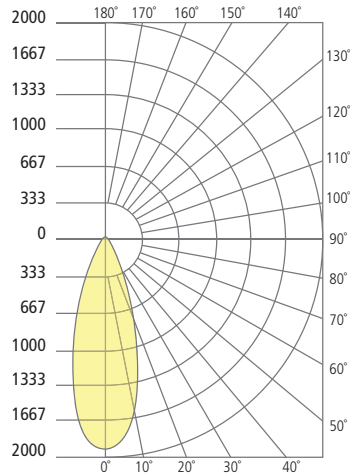


MODE 40° DUAL

Total Lumen Output: 1560
 Total Power: 17.2
 Luminaire Efficacy: 91
 Color Temp: 3000K
 CRI: 90+
 BUG Rating: B2-U0-G0

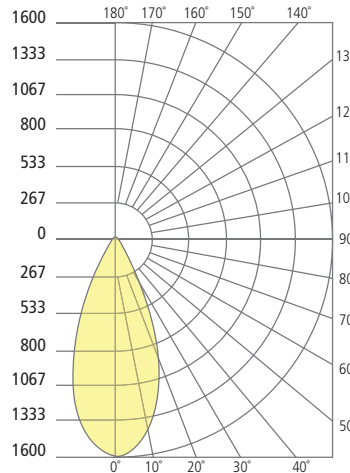

MODE 60° DUAL

Total Lumen Output: 1448
 Total Power: 17.2
 Luminaire Efficacy: 84
 Color Temp: 3000K
 CRI: 90+
 BUG Rating: B1-U1-G0

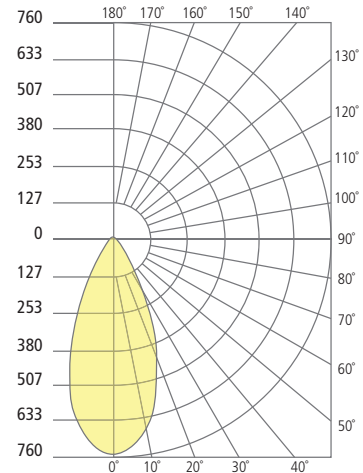

PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES



© 2017 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.



GENERATION BRANDS
 7400 Linder Avenue, Skokie, Illinois 60077
 T 847.410.4400 F 847.410.4500