

The Mode Dual outdoor LED flood/accent light features a minimalist tubular profile with two powerful light sources, both with 185° tilt adjustment and 359° rotation for maximum aiming flexibility. Mode Dual allows accent and way-finding options in a stake- or bolt-mounted path fixture, ideal for illuminating monument signs or landscape features.

### Mode features

- 185° tilt adjustment and 359° rotation for wide aiming flexibility
- Lockable
- Angle markers for consistent and precise aiming
- IP65 rated with marine-grade powder coat finishes
- Multiple stem lengths

### SPECIFICATIONS

DELIVERED LUMENS	1560
WATTS	17.2
VOLTAGE	12V (Transformer sold separately)
DIMMING	MLV
LIGHT DISTRIBUTION	Symmetric
OPTICS	20°, 30°, 40°, and 60°
MOUNTING OPTIONS	Bolt or Stake
CCT	2700K, 3000K, 3500K or 4000K
CRI	90+
COLOR BINNING	3-Step
BUG RATING	B1-U0-G0 (20° Optic)
DARK SKY	Non-Compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 50,000 Hours
WARRANTY*	5 years

\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.



MODE  
shown in bronze



MODE  
shown in charcoal

### TRANSFORMERS\*

(OUTDOOR RATED, ORDERED SEPARATELY)



ITEM	DESCRIPTION	HOUSING	DIMMING
<b>700OT150T</b>	OTDR, MAGNETIC, 150W, 120V	STAINLESS STEEL	MAGNETIC
<b>700OT150T277</b>	OTDR, MAGNETIC, 150W, 277V	STAINLESS STEEL	MAGNETIC
<b>700OT300T</b>	OTDR, MAGNETIC, 300W, 120V	STAINLESS STEEL	MAGNETIC
<b>700OT300T277</b>	OTDR, MAGNETIC, 300W, 277V	STAINLESS STEEL	MAGNETIC

### ORDERING INFORMATION

700OAMDEA	CRI	COLOR TEMPERATURE	LENGTH (A)	WIDTH (B)	BEAM SPREAD	FINISH	INPUT VOLTAGE	OPTION
	9 90 CRI	27 2700K	4 4"	19 19"	20 20°	Z BRONZE	12 12 VOLT*	CONCRETE MOUNT
		30 3000K	8 8"	29 29"	30 30°	H CHARCOAL		ST STAKE MOUNT
		35 3500K	14 14"		40 40°			
		40 4000K	20 20"		60 60°			


\*REQUIRES 12V REMOTE TRANSFORMER

# MODE DUAL OUTDOOR PATH/FLOOD

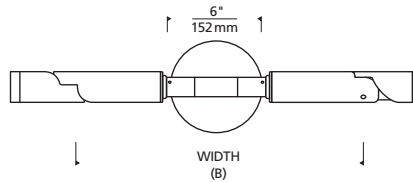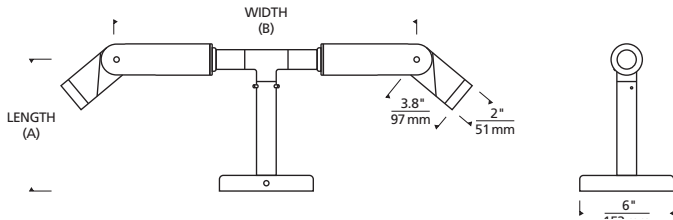

LENGTH (A)	WIDTH (B)
4 4.4"	19 19.2"
8 8.4"	29 29.2"
14 14.4"	
20 20.4"	

Mode Dual Path/Flood

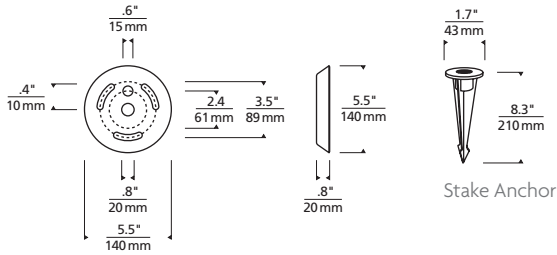


Anchor Plate Bolt Pattern

## PHOTOMETRICS\*

\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)


### MODE 20° DUAL

Total Lumen Output: 1304  
 Total Power: 17.2  
 Luminaire Efficacy: 76  
 Color Temp: 3000K  
 CRI: 90+  
 BUG Rating: B1-U0-G0

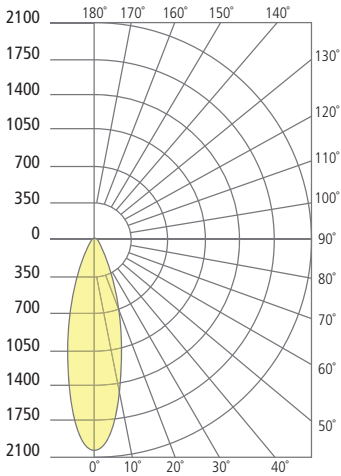


### MODE 30° DUAL

Total Lumen Output: 1422  
 Total Power: 17.2  
 Luminaire Efficacy: 83  
 Color Temp: 3000K  
 CRI: 90+  
 BUG Rating: B2-U0-G0

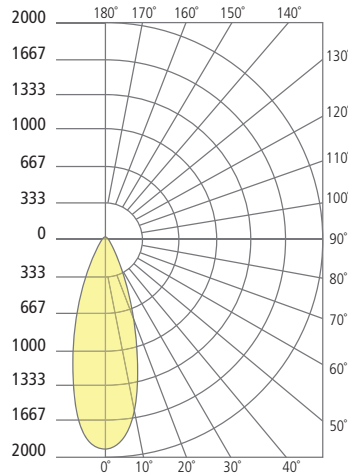


### MODE 40° DUAL

Total Lumen Output: 1560  
 Total Power: 17.2  
 Luminaire Efficacy: 91  
 Color Temp: 3000K  
 CRI: 90+  
 BUG Rating: B2-U0-G0

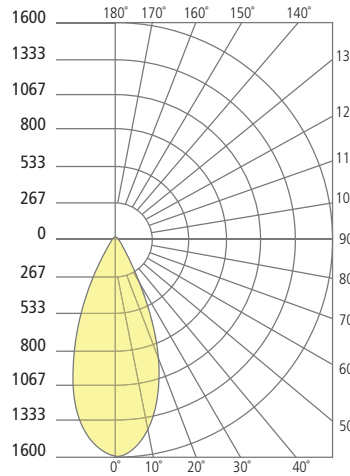

### MODE 60° DUAL

Total Lumen Output: 1448  
 Total Power: 17.2  
 Luminaire Efficacy: 84  
 Color Temp: 3000K  
 CRI: 90+  
 BUG Rating: B1-U1-G0

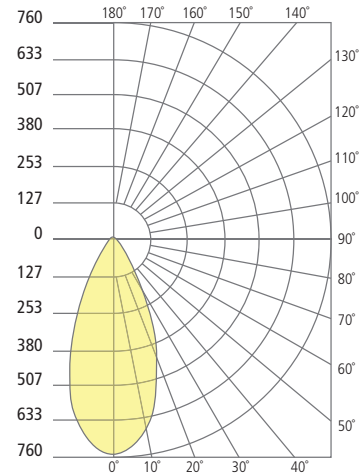

## PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

---



---



---



---



---



---



© 2017 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.



GENERATION BRANDS  
 7400 Linder Avenue, Skokie, Illinois 60077  
 T 847.410.4400 F 847.410.4500