

The Mode Dual outdoor LED flood/accent light features a minimalist tubular profile with two powerful light sources, both with 185° tilt adjustment and 359° rotation for maximum aiming flexibility. Mode Dual allows same-plane illumination when either ceiling or wall mounted, ideal for accenting signage or landscape features.

### Mode features

- 185° tilt adjustment and 359° rotation for wide aiming flexibility
- Lockable
- Angle markers for consistent and precise aiming
- IP65 rated with marine-grade powder coat finishes
- Multiple stem lengths

### SPECIFICATIONS

DELIVERED LUMENS	1560
WATTS	17.2
VOLTAGE	Universal 120V - 277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric
OPTICS	20°, 30°, 40°, and 60°
MOUNTING OPTIONS	Wall or Ceiling
CCT	2700K, 3000K, 3500K or 4000K
CRI	90+
COLOR BINNING	3-Step
BUG RATING	B1-U0-G0 (20° Optic)
DARK SKY	Non-Compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 50,000 Hours
WARRANTY*	5 years



MODE  
shown in bronze




MODE  
shown in charcoal

\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.

### ORDERING INFORMATION

7000WMDEA	CRI	COLOR TEMPERATURE	LENGTH (A)	WIDTH (B)	BEAM SPREAD	FINISH	INPUT VOLTAGE
9	90 CRI	27	4	19	20°	Z	UNV UNIVERSAL 120-277V
		30	8	29	30°	H	
		35	14	40	40°		
		40	20	60	60°		
			20				

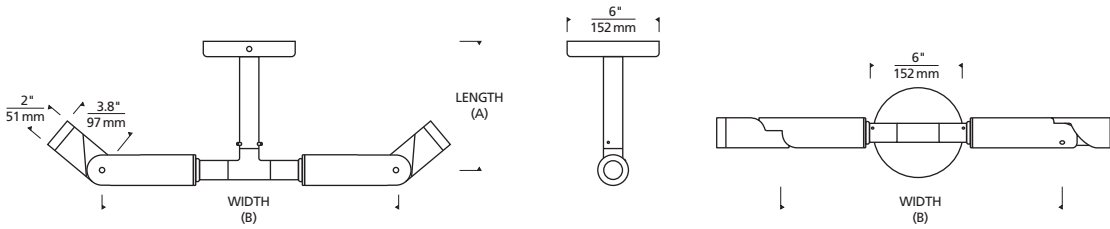

	LENGTH (A)	WIDTH (B)
4	4.4"	19 19.2"
8	8.4"	29 29.2"
14	14.4"	
20	20.4" (CEILING ONLY)	

Mode Dual Wall/Ceiling

## PHOTOMETRICS\*

\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)

### MODE 20° DUAL

Total Lumen Output: 1304  
 Total Power: 17.2  
 Luminaire Efficacy: 76  
 Color Temp: 3000K  
 CRI: 90+  
 BUG Rating: B1-U0-G0

### MODE 30° DUAL





Total Lumen Output: 1422  
 Total Power: 17.2  
 Luminaire Efficacy: 83  
 Color Temp: 3000K  
 CRI: 90+  
 BUG Rating: B2-U0-G0

### MODE 40° DUAL

Total Lumen Output: 1560  
 Total Power: 17.2  
 Luminaire Efficacy: 91  
 Color Temp: 3000K  
 CRI: 90+  
 BUG Rating: B2-U0-G0

### MODE 60° DUAL

Total Lumen Output: 1448  
 Total Power: 17.2  
 Luminaire Efficacy: 84  
 Color Temp: 3000K  
 CRI: 90+  
 BUG Rating: B1-U1-G0

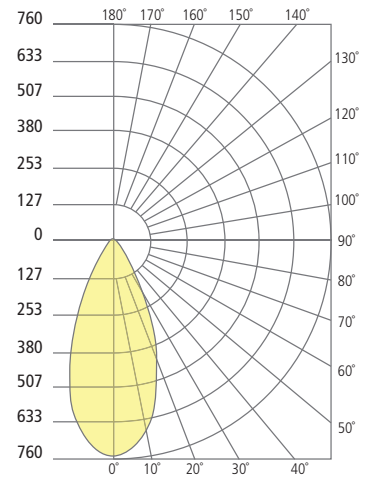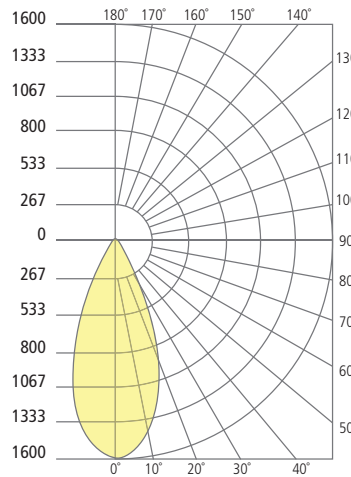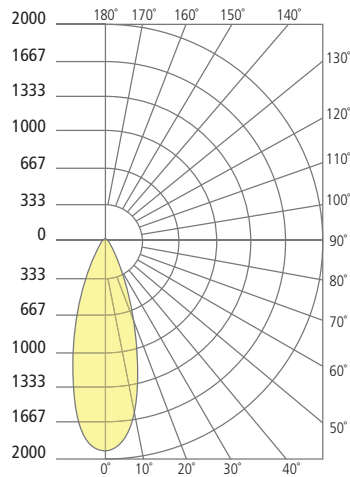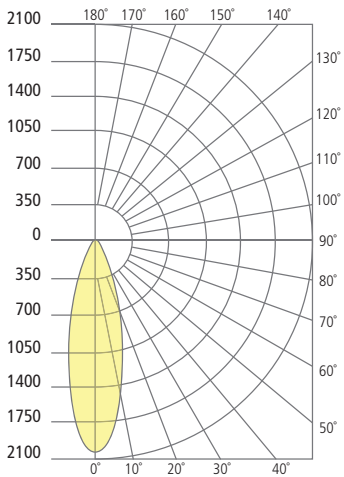

## PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

---



---



---



---



---



---



© 2017 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.