

The Mode Dual outdoor LED flood/accent light features a minimalist tubular profile with two powerful light sources, both with 185° tilt adjustment and 359° rotation for maximum aiming flexibility. Mode Dual allows same-plane illumination when either ceiling or wall mounted, ideal for accenting signage or landscape features.

Mode features

- 185° tilt adjustment and 359° rotation for wide aiming flexibility
- Lockable
- Angle markers for consistent and precise aiming
- IP65 rated with marine-grade powder coat finishes
- Multiple stem lengths

SPECIFICATIONS

DELIVERED LUMENS	1560
WATTS	17.2
VOLTAGE	Universal 120V - 277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric
OPTICS	20°, 30°, 40°, and 60°
MOUNTING OPTIONS	Wall or Ceiling
CCT	2700K, 3000K, 3500K or 4000K
CRI	90+
COLOR BINNING	3-Step
BUG RATING	B1-U0-G0 (20° Optic)
DARK SKY	Non-Compliant
WET LISTED	IP65
GENERAL LISTING	ETL, Title 24
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 50,000 Hours
WARRANTY*	5 years

* Visit techlighting.com for specific warranty limitations and details.




MODE
shown in bronze



MODE
shown in charcoal

ORDERING INFORMATION

7000WMDEA	CRI	COLOR TEMPERATURE	LENGTH (A)	WIDTH (B)	BEAM SPREAD	FINISH	INPUT VOLTAGE
	9 90 CRI	27 2700K	4 4"	19 19"	20 20°	Z BRONZE	UNV UNIVERSAL 120-277V
		30 3000K	8 8"	29 29"	30 30°	H CHARCOAL	
		35 3500K	14 14"		40 40°		
		40 4000K	20 20" (CEILING ONLY)		60 60°		

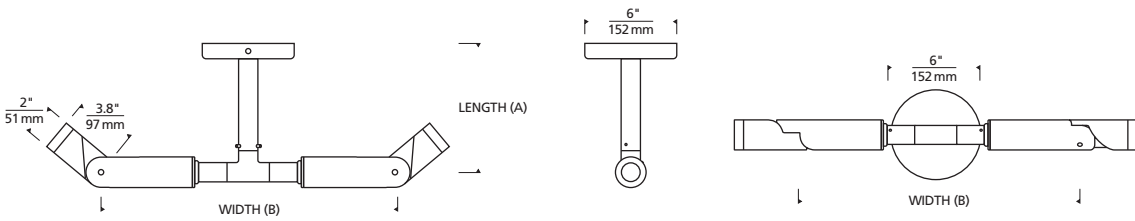

	LENGTH (A)	WIDTH (B)
4	4.4"	19 19.2"
8	8.4"	29 29.2"
14	14.4"	
20	20.4" (CEILING ONLY)	

Mode Dual Wall/Ceiling

PHOTOMETRICS*

*For latest photometrics, please visit www.techlighting.com/OUTDOOR

MODE 20° DUAL

Total Lumen Output:	1304
Total Power:	17.2
Luminaire Efficacy:	76
Color Temp:	3000K
CRI:	90+
BUG Rating:	B1-U0-G0

MODE 30° DUAL





Total Lumen Output:	1422
Total Power:	17.2
Luminaire Efficacy:	83
Color Temp:	3000K
CRI:	90+
BUG Rating:	B2-U0-G0

MODE 40° DUAL

Total Lumen Output:	1560
Total Power:	17.2
Luminaire Efficacy:	91
Color Temp:	3000K
CRI:	90+
BUG Rating:	B2-U0-G0

MODE 60° DUAL

Total Lumen Output:	1448
Total Power:	17.2
Luminaire Efficacy:	84
Color Temp:	3000K
CRI:	90+
BUG Rating:	B1-U1-G0

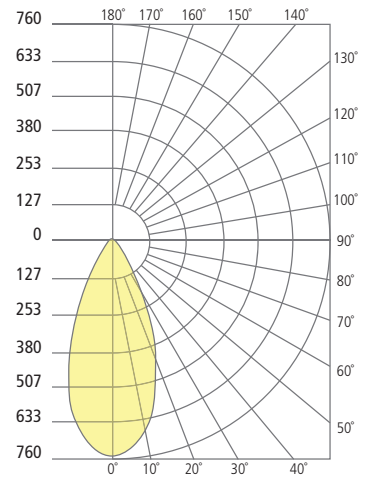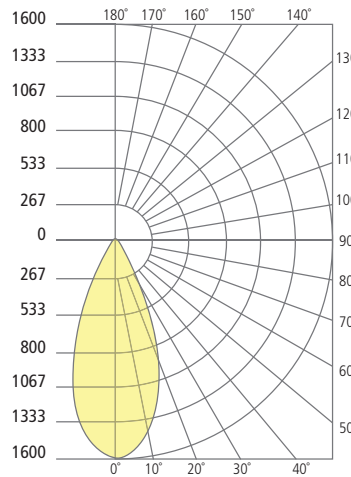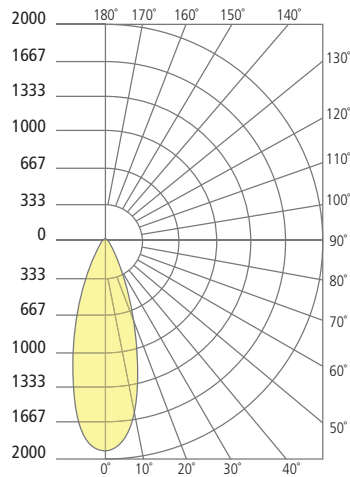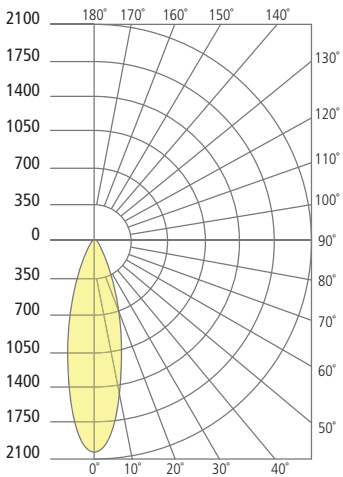

PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES



© 2017 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.