

The Mode Split outdoor LED path light features a minimalist tubular profile with a unique “split” design that features 2 semi-circular arms that can be aimed together or independently for maximum flexibility. Featuring 185° tilt adjustment and 359° rotation, Mode Split allows accent and way-finding options in a stake- or bolt-mounted path fixture.

### Mode features

- Two independent light sources
- 185° tilt adjustment and 359° rotation for wide aiming flexibility
- Lockable
- Angle markers for consistent and precise aiming
- IP65 rated with marine-grade powder coat finishes
- Multiple stem lengths

### SPECIFICATIONS

DELIVERED LUMENS	1235
WATTS	16.2
VOLTAGE	12V (Transformer sold separately)
DIMMING	MLV
LIGHT DISTRIBUTION	Symmetric
OPTICS	20°, 30°, 40°, and 60°
MOUNTING OPTIONS	Bolt or Stake
CCT	2700K, 3000K, 3500K or 4000K
CRI	90+
COLOR BINNING	3-Step
BUG RATING	B1-U0-G0 (20° Optic)
DARK SKY	Non-Compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 50,000 Hours
WARRANTY*	5 years



MODE  
shown in bronze



MODE  
shown in charcoal

### TRANSFORMERS\*

(OUTDOOR RATED, ORDERED SEPARATELY)

ITEM	DESCRIPTION	HOUSING	DIMMING
700OT150T	OTDR, MAGNETIC, 150W, 120V	STAINLESS STEEL	MAGNETIC
700OT150T277	OTDR, MAGNETIC, 150W, 277V	STAINLESS STEEL	MAGNETIC
700OT300T	OTDR, MAGNETIC, 300W, 120V	STAINLESS STEEL	MAGNETIC
700OT300T277	OTDR, MAGNETIC, 300W, 277V	STAINLESS STEEL	MAGNETIC


\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.

### ORDERING INFORMATION

700OAMDED	CRI	COLOR TEMPERATURE	LENGTH (A)	BEAM SPREAD	FINISH	INPUT VOLTAGE	OPTION
	9 90 CRI	27 2700K	10 10"	20 20°	Z BRONZE	12 12 VOLT*	CONCRETE MOUNT
		30 3000K	14 14"	30 30°	H CHARCOAL		ST STAKE MOUNT
		35 3500K	20 20"	40 40°			
		40 4000K	26 26"	60 60°			

\*REQUIRES 12V REMOTE TRANSFORMER

# MODE SPLIT OUTDOOR PATH/FLOOD

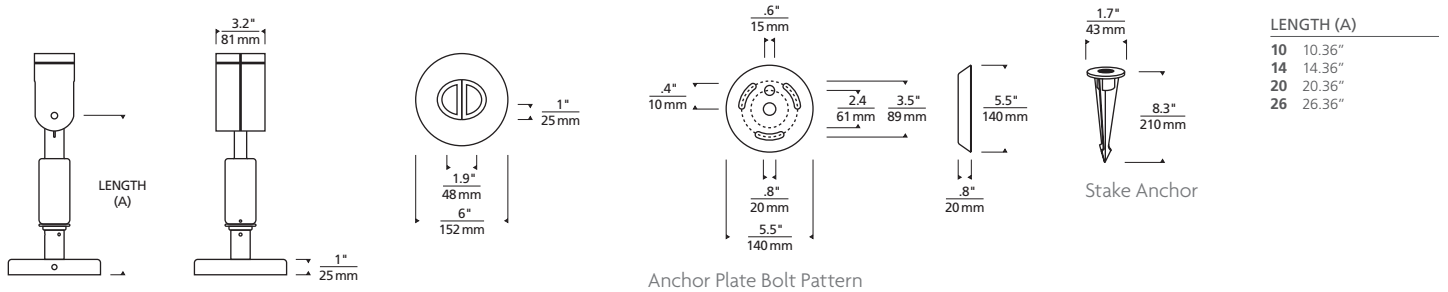

Mode Split Path/Flood

## PHOTOMETRICS\*

\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)

### MODE 20° PATH

Total Lumen Output: 997  
 Total Power: 16.2  
 Luminaire Efficacy: 62  
 Color Temp: 3000K  
 CRI: 90+  
 BUG Rating: BI-U0-G0

### MODE 30° PATH





Total Lumen Output: 1092  
 Total Power: 16.2  
 Luminaire Efficacy: 67  
 Color Temp: 3000K  
 CRI: 90+  
 BUG Rating: B2-U0-G0

### MODE 40° PATH

Total Lumen Output: 1173  
 Total Power: 16.2  
 Luminaire Efficacy: 72  
 Color Temp: 3000K  
 CRI: 90+  
 BUG Rating: B2-U0-G0

### MODE 60° PATH

Total Lumen Output: 1235  
 Total Power: 16.2  
 Luminaire Efficacy: 76  
 Color Temp: 3000K  
 CRI: 90+  
 BUG Rating: B2-U1-G0

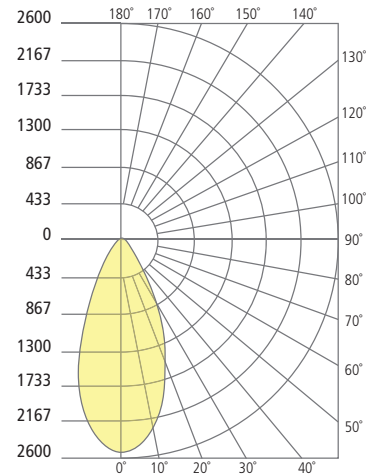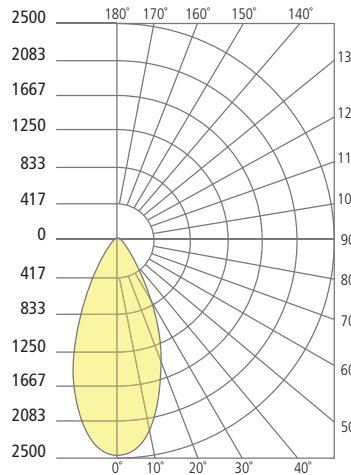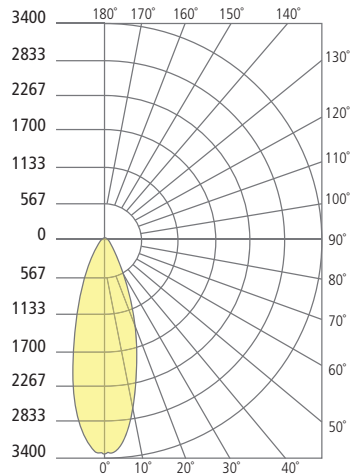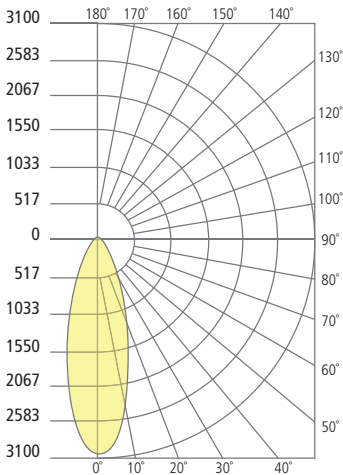

## PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

---



---



---



---



---



---



© 2017 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.



GENERATION BRANDS  
 7400 Linder Avenue, Skokie, Illinois 60077  
 T 847.410.4400 F 847.410.4500