

LOW - VOLTAGE PENDANTS

Peyton Pendant

DESCRIPTION

Cylindrical shade composed of glass mosaic tiles and inner frost glass diffuser. Includes low-voltage, 50 watt halogen bi-pin lamp or 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module and six feet of field-cutttable cable. Dimmable with low-voltage electronic or magnetic dimmer (based on transformer). Works with SORAA.

INSTALLATION


Socket terminates with FreeJack male connector, which may be installed into a system connector. Elements ordered with a system prefix include a connector for that system.

ACCESSORIES & OPTICAL CONTROLS

SORAA® LED Bi-Pin Replacement Pendant Module

WEIGHT

2.5lb / 1.13kg ±

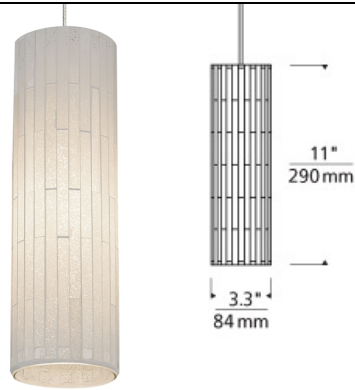

brown



white

ORDERING INFORMATION

700	SYSTEM	PEY	COLOR	FINISH	LAMP
FJ	FREEJACK		W WHITE	Z ANTIQUE BRONZE	12 VOLT HALOGEN
MP	MONOPOINT			C CHROME	-LEDS930 12 VOLT LED 90 CRI 3000K
MO	MONORAIL			S SATIN NICKEL	-24 24 VOLT HALOGEN
MO2	TWO-CIRCUIT MONORAIL				

Note: MP includes 4" Round Flush Canopy. Note: MP includes 4 Round Flush Canopy.

When installing LED option on MO2 only magnetic transformers may be used.

Chrome not offered on Monorail & Two-Circuit Monorail.



7400 Linder Avenue T 847.410.4400
Skokie, Illinois 60077 F 847.410.4500

Tech Lighting, L.L.C.

700 ____ PEY ____

FIXTURE TYPE: _____

JOB NAME: _____

NOTES: _____



©2017 Tech Lighting, L.L.C. All Rights Reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.