

PITCH DOUBLE WALL SCONCE



An architectural profile reminiscent of beautifully classic roof lines delivers significant light output in this modern LED wall sconce suitable for both indoor and outdoor applications. The Pitch Double's die-cast metal body houses powerful LED light sources that create visual appeal as light cascades from one angular tier to the next.

High quality LM80-tested LEDs

for consistent long-life performance and color

Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

Can be mounted for up lighting or down lighting

SPECIFICATIONS

DELIVERED LUMENS	1193
WATTS	47.5
VOLTAGE	120V, 277V
DIMMING	ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Downlight or Uplight
CCT	3000K
CRI	80+
COLOR BINNING	3 Step
BUG RATING	B1-U1-G0
DARK SKY	Compliant (Downlight)
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	No
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years

* Visit techlighting.com for specific warranty limitations and details.



PITCH DOUBLE
shown in black



PITCH DOUBLE
shown in bronze



PITCH DOUBLE
shown in charcoal




PITCH DOUBLE
shown in silver

ORDERING INFORMATION

700WSPIT	SIZE	FINISH	LAMP
	D DOUBLE	B BLACK	-LED830 LED 80 CRI, 3000K 120V
		Z BRONZE	-LED830277 LED 80 CRI, 3000K 277V
		H CHARCOAL	
		I SILVER	

PITCH DOUBLE WALL SCNCE




Pitch Double

PHOTOMETRICS*

*For latest photometrics, please visit www.techlighting.com/OUTDOOR

PITCH DOUBLE

Total Lumen Output: 1193
 Total Power: 47.5
 Luminaire Efficacy: 25.1
 Color Temp: 3000K
 CRI: 80+
 BUG Rating: BI-U1-GO

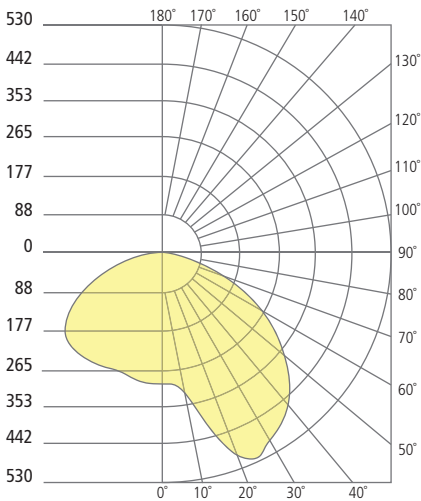

PROJECT INFO

FIXTURE TYPE & QUANTITY	JOB NAME & INFO	NOTES



GENERATION BRANDS
 7400 Linder Avenue, Skokie, Illinois 60077
 T 847.410.4400 F 847.410.4500