

# PITCH SINGLE WALL SCONCE



An architectural profile reminiscent of beautifully classic roof lines delivers significant light output in this modern LED wall sconce suitable for both indoor and outdoor applications. The Pitch Single's die-cast metal body houses powerful LED light sources that create visual appeal as light cascades down along a wall.

## High quality LM80-tested LEDs

for consistent long-life performance and color

## Outstanding protection against the elements:


- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

## Can be mounted for up lighting or down lighting

## SPECIFICATIONS

DELIVERED LUMENS	823
WATTS	26.1
VOLTAGE	120V, 277V
DIMMING	ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Downlight or Uplight
CCT	3000K
CRI	80+
COLOR BINNING	3 Step
BUG RATING	B1-U0-G0
DARK SKY	Compliant (Downlight)
WET LISTED	IP65
GENERAL LISTING	ETL, Title 24
START TEMP	-30°C
FIELD SERVICEABLE LED	No
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years

\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.



PITCH SINGLE  
shown in black



PITCH SINGLE  
shown in bronze



PITCH SINGLE  
shown in charcoal




PITCH SINGLE  
shown in silver

## ORDERING INFORMATION

700WSPIT	SIZE	FINISH	LAMP
	S SINGLE	B BLACK	-LED830 LED 80 CRI, 3000K 120V
		Z BRONZE	-LED830277 LED 80 CRI, 3000K 277V
		H CHARCOAL	
		I SILVER	

# PITCH SINGLE WALL SCONCE




Pitch Single

## PHOTOMETRICS\*

\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)

### PITCH SINGLE

Total Lumen Output: 823  
 Total Power: 26.2  
 Luminaire Efficacy: 31.4  
 Color Temp: 3000K  
 CRI: 80+  
 BUG Rating: B1-U0-G0

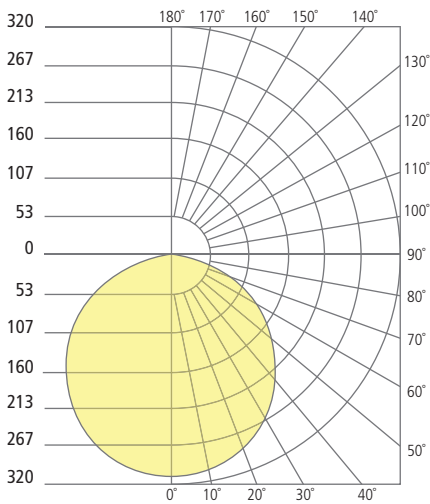

## PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

---



---



---



---



---



---




GENERATION BRANDS  
 7400 Linder Avenue, Skokie, Illinois 60077  
 T 847.410.4400 F 847.410.4500



© 2016 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.



# PITCH DOUBLE WALL SCNCE




Pitch Double

## PHOTOMETRICS\*

\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)

### PITCH DOUBLE

Total Lumen Output: 1193  
 Total Power: 47.5  
 Luminaire Efficacy: 25.1  
 Color Temp: 3000K  
 CRI: 80+  
 BUG Rating: BI-U1-GO

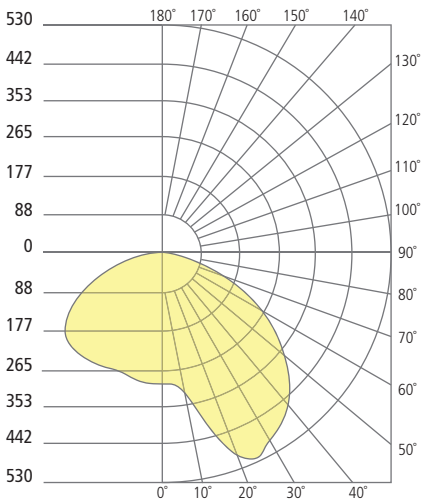

## PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

---



---



---



---



---



---



GENERATION BRANDS  
 7400 Linder Avenue, Skokie, Illinois 60077  
 T 847.410.4400 F 847.410.4500



© 2016 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.

# PITCH TRIPLE WALL SCONCE



An architectural profile reminiscent of beautifully classic roof lines delivers significant light output in this modern LED wall sconce suitable for both indoor and outdoor applications. The Pitch Triple's die-cast metal body houses powerful LED light sources that create visual appeal as light cascades from one angular tier to the next.

## High quality LM80-tested LEDs

for consistent long-life performance and color

## Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

## Can be mounted for up lighting or down lighting

## SPECIFICATIONS

DELIVERED LUMENS	1486
WATTS	63.6
VOLTAGE	120V, 277V
DIMMING	ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Downlight or Uplight
CCT	3000K
CRI	80+
COLOR BINNING	3 Step
BUG RATING	B1-U2-G1
DARK SKY	Compliant (Downlight)
WET LISTED	IP65
GENERAL LISTING	ETL, Title 24
START TEMP	-30°C
FIELD SERVICEABLE LED	No
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years

\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.



PITCH TRIPLE  
shown in black



PITCH TRIPLE  
shown in bronze



PITCH TRIPLE  
shown in charcoal




PITCH TRIPLE  
shown in silver

## ORDERING INFORMATION

700WSPIT	SIZE	FINISH	LAMP
T	TRIPLE	B BLACK	-LED830 LED 80 CRI, 3000K 120V
Z	BRONZE	-LED830277	LED 80 CRI, 3000K 277V
H	CHARCOAL		
I	SILVER		

# PITCH TRIPLE WALL SCONCE




Pitch Triple

## PHOTOMETRICS\*

\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)

### PITCH TRIPLE

Total Lumen Output: 1486  
 Total Power: 63.6  
 Luminaire Efficacy: 23.3  
 Color Temp: 3000K  
 CRI: 80+  
 BUG Rating: B1-U2-G1

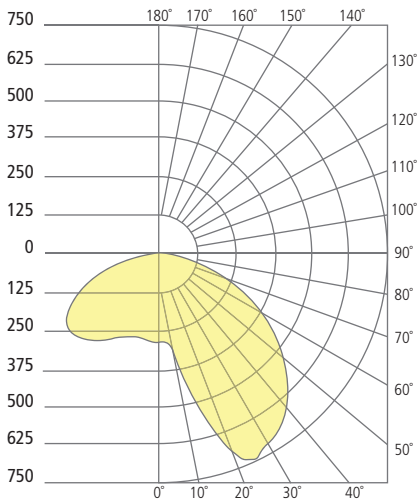

## PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

---



---



---



---



---



---



GENERATION BRANDS  
 7400 Linder Avenue, Skokie, Illinois 60077  
 T 847.410.4400 F 847.410.4500



© 2016 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.