

LINEAR SUSPENSION


Rae Linear Suspension

DESCRIPTION

The ultimate combination of simplicity and light output. A special co-extruded remote phosphor LED channel, less than 1" deep, provides a flawlessly even wash of light perfect for task-oriented spaces like conference rooms and reception areas. 16 watts, 1040 net lumens or 32 watts, 2080 net lumens available in 4 CCT options and 2 CRI options. Ships with 12 feet of field-cuttale cable. Dimmable with low-voltage electronic dimmer.

INSTALLATION

This product can mount to either a 4" square electrical box with round plaster ring or an octagonal electrical box (not included).

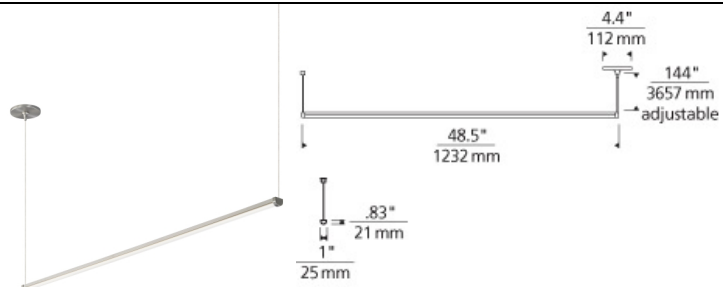

chrome

satin nickel

ORDERING INFORMATION

700	SYSTEM	RAER	SHAPE OR SIZE	LENGTH (A)	FINISH	LAMP	VOLTAGE
LS	LINEAR SUSPENSION		3 300LMS/FT	48 48"	S SATIN NICKEL	-LED824 LED 80 CRI 2400K	120 VOLT
MO	MONORAIL		6 600LMS/FT			-LED835 LED 80 CRI 3500K -LED840 LED 80 CRI 4000K -LED930 LED 90 CRI 3000K	-277 277 VOLT

If suspending on MonoRail, it does not require a voltage designation.



TECH LIGHTING®
 7400 Linder Avenue T 847.410.4400
 Skokie, Illinois 60077 F 847.410.4500

Tech Lighting, L.L.C.

700 ____ RAER _____

FIXTURE TYPE: _____

JOB NAME: _____

NOTES: _____
