

The uniquely modern Revel outdoor path light features a sleek metal surface that is laser-cut with horizontal slots which allow the LED light to shine through an inner white diffuser. The subtle, ambient glow enhances way-finding on paths or in landscape applications.

High quality LM80-tested LEDs

for consistent long-life performance and color

Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

Path light features either Bolt or Stake mounting options

SPECIFICATIONS

DELIVERED LUMENS	122.1
WATTS	17.6
VOLTAGE	12V (Transformer sold separately)
DIMMING	MLV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Bolt or Stake
PERFORMANCE OPTIONS	N/A
CCT	3000K
CRI	80+
COLOR BINNING	3 Step
BUG RATING	B0-U2-G0
DARK SKY	Compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years

* Visit techlighting.com for specific warranty limitations and details.



REVEL PATH
shown in bronze



REVEL PATH
shown in charcoal

TRANSFORMERS*


(OUTDOOR RATED, ORDERED SEPARATELY)

ITEM	DESCRIPTION	HOUSING	DIMMING
7000T150T	OTDR, MAGNETIC, 150W, 120V	STAINLESS STEEL	MAGNETIC
7000T150T277	OTDR, MAGNETIC, 150W, 277V	STAINLESS STEEL	MAGNETIC
7000T300T	OTDR, MAGNETIC, 300W, 120V	STAINLESS STEEL	MAGNETIC
7000T300T277	OTDR, MAGNETIC, 300W, 277V	STAINLESS STEEL	MAGNETIC

ORDERING INFORMATION

7000ARVL	CRI/CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
830	80 CRI, 3000K	8 8"	D DIFFUSE	Z BRONZE H CHARCOAL	12 12V	S SYMMETRIC	CONCRETE MOUNT ST STAKE MOUNTING KIT

*REQUIRES 12V REMOTE TRANSFORMER

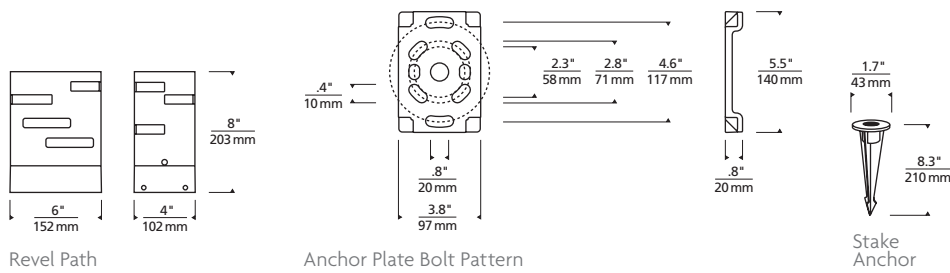


PHOTOMETRICS*

*For latest photometrics, please visit www.techlighting.com/OUTDOOR

REVEL PATH

Total Lumen Output: 122.1
 Total Power: 17.6
 Luminaire Efficacy: 6.9
 Color Temp: 3000K
 CRI: 80+
 BUG Rating: B0-U2-G0

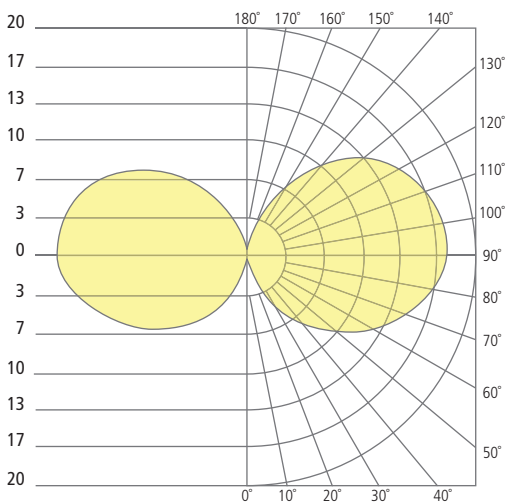

PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES
