

LOW - VOLTAGE HEADS


Sprocket Head

DESCRIPTION

Sleek Sprocket, with its removable handle, has many accessory options. Head rotates 360° and pivots 260° on vertical axis. Low-voltage, MR16 lamp of up to 75 watts (not included). Works with SORAA.

INSTALLATION

Socket terminates with FreeJack male connector, which may be installed into a system connector. Elements ordered with a system prefix include a connector for that system.

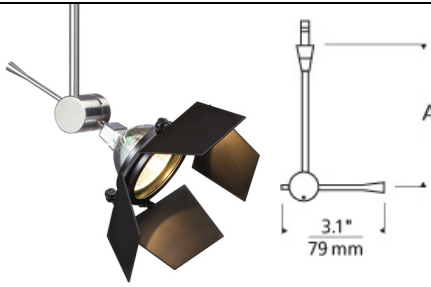

ACCESSORIES & OPTICAL CONTROLS

Backlight Shield, Barndoors, Snap Louver Lens Holder

WEIGHT

0.35-0.9lb / 0.16-0.41kg ±



bare straight with backlight shield accessory with barndoors with mesh backlight shield accessory and eggcrate louver

ORDERING INFORMATION

700 SYSTEM	SP	LENGTH (A)	FINISH
FJ	FREEJACK	1 1"	Z ANTIQUE BRONZE
MP	MONOPOINT	3 3"	C CHROME
MO	MONORAIL	6 6"	S SATIN NICKEL
MO2	TWO-CIRCUIT MONORAIL	12 12"	
WMO	WALL MONORAIL	18 18"	
		24 24"	

Note: MP includes 4" Round Flush Canopy.



700 ____ SP ____

FIXTURE TYPE: _____

JOB NAME: _____

NOTES: _____
