

# LOW - VOLTAGE HEADS


## Sprocket Head

### DESCRIPTION

Sleek Sprocket, with its removable handle, has many accessory options. Head rotates 360° and pivots 260° on vertical axis. Low-voltage, MR16 lamp of up to 75 watts (not included). Works with SORAA.

### INSTALLATION

Socket terminates with FreeJack male connector, which may be installed into a system connector. Elements ordered with a system prefix include a connector for that system.

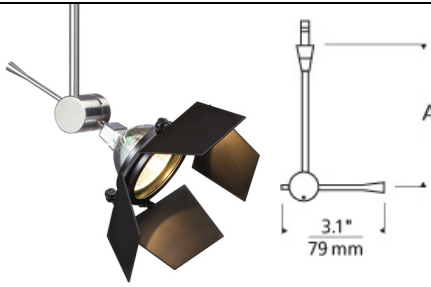

### ACCESSORIES & OPTICAL CONTROLS

Backlight Shield, Barndoors, Snap Louver Lens Holder

### WEIGHT

0.35-0.9lb / 0.16-0.41kg ±



bare      straight      with backlight shield accessory      with barndoors      with mesh backlight shield accessory and eggcrate louver

### ORDERING INFORMATION

| 700 SYSTEM | SP                   | LENGTH (A) | FINISH           |
|------------|----------------------|------------|------------------|
| FJ         | FREEJACK             | 1 1"       | Z ANTIQUE BRONZE |
| MP         | MONOPOINT            | 3 3"       | C CHROME         |
| MO         | MONORAIL             | 6 6"       | S SATIN NICKEL   |
| MO2        | TWO-CIRCUIT MONORAIL | 12 12"     |                  |
| WMO        | WALL MONORAIL        | 18 18"     |                  |
|            |                      | 24 24"     |                  |

Note: MP includes 4" Round Flush Canopy.



700 \_\_\_\_ SP \_\_\_\_

FIXTURE TYPE: \_\_\_\_\_

JOB NAME: \_\_\_\_\_

NOTES: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_



©2017 Tech Lighting, L.L.C. All Rights Reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.