

# LOW - VOLTAGE HEADS

## Stealth Head



### DESCRIPTION

Inspired by advanced aerodynamics, this sleek LED head features a die-cast aluminum tail which also serves as its heat sink. The head rotates 360°, pivots 210° and is available in two beam spreads, 25° or 40°. Includes field replaceable 10 watt, 510 net lumen, 3000K LED module and removable eggcrate louver (compatible with 12V systems only). Dimmable to 10% with low-voltage electronic or magnetic dimmer (based on the transformer).

### INSTALLATION

Socket terminates with FreeJack male connector, which may be installed into a system connector. Elements ordered with a system prefix include a connector for that system. For use on T~TRAK, order FreeJack version and T~TRAK FreeJack Connector (sold separately).

### ACCESSORIES & OPTICAL CONTROLS



Eggcrate Louver

### WEIGHT

2.2lb / 1kg ±



stealth head

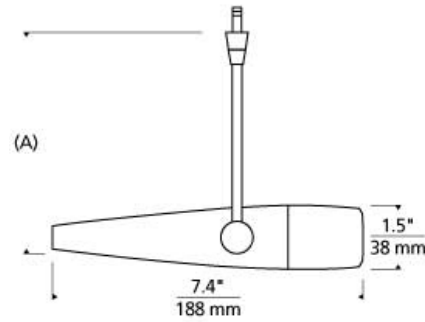

### ORDERING INFORMATION

700	SYSTEM	STL	CRI	COLOR TEMP	BEAM SPREAD	LENGTH (A)	FINISH
FJ	FREEJACK		8 80 CRI	30 3000K LED	25 25°	04 4.5"	S SATIN NICKEL
MP	MONOPOINT				40 40°	12 12"	
MO	MONORAIL					18 18"	
MO2	TWO-CIRCUIT MONORAIL						
WMO	WALL MONORAIL						

Note: MP includes 4 Round Flush Canopy.

When installing LED option on MO2 only magnetic transformers may be used.



**TECH LIGHTING®**  
 7400 Linder Avenue      T 847.410.4400  
 Skokie, Illinois 60077      F 847.410.4500

**Tech Lighting, L.L.C.**

700 \_\_\_\_ STL \_\_\_\_\_

FIXTURE TYPE: \_\_\_\_\_

JOB NAME: \_\_\_\_\_

NOTES: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_