

The Strut LED path exemplifies the epitome of a modern, minimalist aesthetic. The clean lines and modern design can effortlessly disappear into the setting or be positioned to make a bold statement. Also available as a matching 42" bollard. Ideal for outdoor path and campus illumination.

### High quality LM80-tested LEDs

for consistent long-life performance and color

### Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

### Bolt or Stake mounting options

## SPECIFICATIONS

DELIVERED LUMENS	693
WATTS	15
VOLTAGE	12V (Transformer sold separately)
DIMMING	MLV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Bolt or Stake
CCT	2700K, 3000K
CRI	90
COLOR BINNING	3 Step
BUG RATING	B0-U1-G0
DARK SKY	Compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years
WEIGHT	4 lbs.

\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.



STRUT PATH  
shown in bronze



STRUT PATH  
shown in charcoal

### 12V AC TRANSFORMERS\*


(OUTDOOR RATED, ORDERED SEPARATELY)

ITEM	DESCRIPTION	HOUSING	DIMMING
700OT150T	MAGNETIC, 150W, 120V	STAINLESS STEEL	MAGNETIC
700OT150T277	MAGNETIC, 150W, 277V	STAINLESS STEEL	MAGNETIC
700OT300T	MAGNETIC, 300W, 120V	STAINLESS STEEL	MAGNETIC
700OT300T277	MAGNETIC, 300W, 277V	STAINLESS STEEL	MAGNETIC

## ORDERING INFORMATION

700OASTR	CRI/CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
	927 90 CRI, 2700K	18 18"	D DIFFUSE	Z BRONZE	12 12V*	S SYMMETRIC	CONCRETE MOUNT
	930 90 CRI, 3000K			H CHARCOAL			ST STAKE MOUNTING KIT
				B BLACK			

\*12V TRANSFORMER ORDERED SEPARATELY.




Strut Path

## PHOTOMETRICS\*

\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)

### STRUT PATH

Total Lumen Output: 693  
 Total Power: 14.6  
 Luminaire Efficacy: 47  
 Color Temp: 3000K  
 CRI: 80+  
 BUG Rating: B0-U1-G0

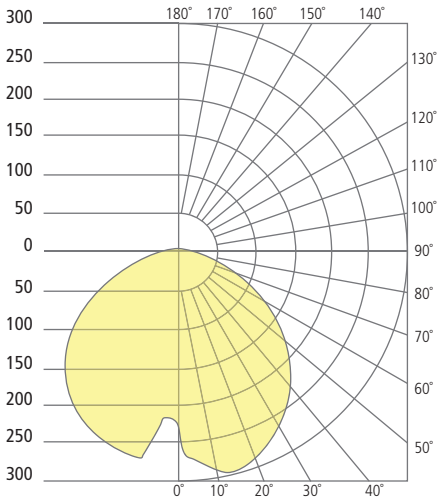

## PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

---



---



---



---



---



---