

Clean, modern design and outstanding light performance distinguish Taag high output LED wall packs. Designed for outdoor security and general illumination, Taag 10 wall pack delivers over 8800 lumens of light performance in commercial and residential applications for which powerful illumination is required.

High quality LM80-tested LEDs

for consistent long-life performance and color

Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

Taag 10 delivers over 8800 lumens for maximum illumination and security with Type III or Type IV light distribution

SPECIFICATIONS

DELIVERED LUMENS	8889
WATTS	77
VOLTAGE	Universal 120V, 277V, with integral transient 2.5kV surge protection
DIMMING	0-10
LIGHT DISTRIBUTION	Type III, Type IV
MOUNTING OPTIONS	Wall
PERFORMANCE OPTIONS	Photocontrol / In-Line Fuse / Surge Protector
CCT	3000K or 4000K
CRI	80+
COLOR BINNING	3 Step
BUG RATING	B2-U1-G2
DARK SKY	Compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years



TAAG 10
shown in bronze




TAAG 10
shown in charcoal

* Visit techlighting.com for specific warranty limitations and details.

ORDERING INFORMATION

700OWTAG	CRI/CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
	830 80 CRI, 3000K 840 80 CRI, 4000K	10 10"	C CLEAR	Z BRONZE H CHARCOAL	UNV 120V~277V	3 TYPE 3 DISTRIBUTION 4 TYPE 4 DISTRIBUTION	NONE PC BUTTON PHOTOCONTROL LF IN-LINE FUSE SP SURGE PROTECTION PCLF BUTTON PHOTOCONTROL & IN-LINE FUSE PCSP BUTTON PHOTOCONTROL & SURGE PROTECTION LFSP IN-LINE FUSE & SURGE PROTECTION PCLFSP BUTTON PHOTOCONTROL, IN-LINE FUSE & SURGE PROTECTION

TAAG 10 WALL

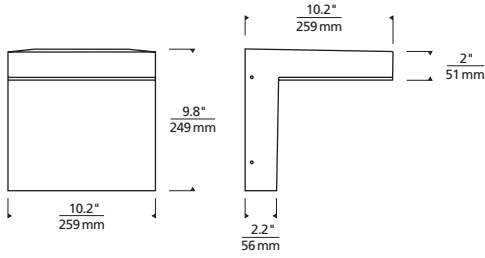

Taag 10

PHOTOMETRICS*



*For latest photometrics, please visit www.techlighting.com/OUTDOOR

TAAG 10 TYPE 3 DISTRIBUTION

Total Lumen Output:	8889
Total Power:	77
Luminaire Efficacy:	115
Color Temp:	4000K
CRI:	80+
BUG Rating:	B2-U1-G2

TAAG 10 TYPE 4 DISTRIBUTION

Total Lumen Output:	8873
Total Power:	76
Luminaire Efficacy:	117
Color Temp:	4000K
CRI:	80+
BUG Rating:	B2-U1-G2

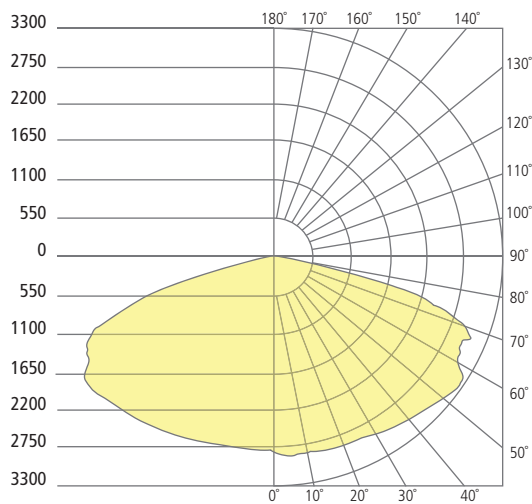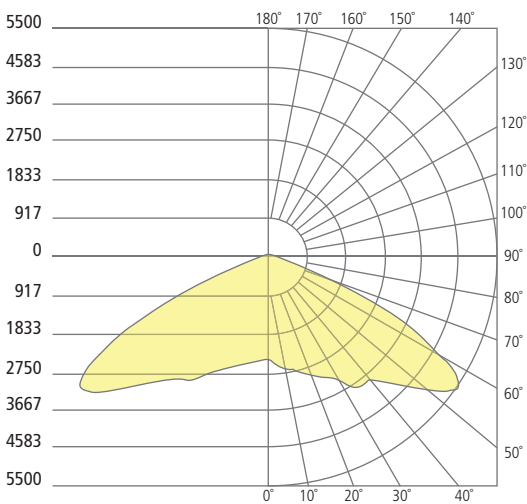

PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES



© 2016 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.



GENERATION BRANDS
7400 Linder Avenue, Skokie, Illinois 60077
T 847.410.4400 F 847.410.4500