

LOW - VOLTAGE PENDANTS

Veil Pendant

DESCRIPTION

Cylindrical shade with crushed glass texture accented with inner layer of gold or silver. Includes low-voltage, 50 watt halogen bi-pin lamp or 8 watt replaceable 500 lumen 80 CRI 3000K LED SORAA® module and six feet of field-cutttable suspension cable. Works with SORAA.

INSTALLATION


Socket terminates with FreeJack male connector, which may be installed into a system connector. Elements ordered with a system prefix include a connector for that system.

ACCESSORIES & OPTICAL CONTROLS

SORAA® LED Bi-Pin Replacement Pendant Module

WEIGHT

2.38lb / 1.08kg ±

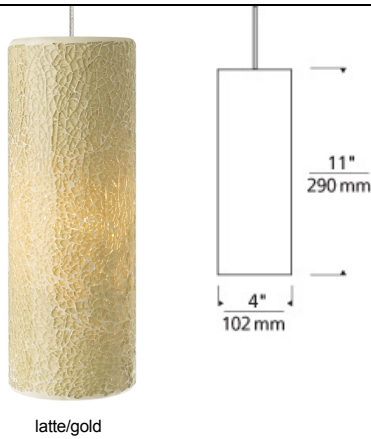

brown/gold



latte/gold



white/silver

ORDERING INFORMATION

| 700 | SYSTEM | VEI | COLOR | FINISH | LAMP |
|-----|----------------------|-----|----------------|------------------|-----------------------------------|
| FJ | FREEJACK | | N BROWN/GOLD | Z ANTIQUE BRONZE | 12 VOLT HALOGEN |
| MP | MONOPOINT | | L LATTE/GOLD | C CHROME | -LEDS830 12 VOLT LED 80 CRI 3000K |
| MO | MONORAIL | | W WHITE/SILVER | S SATIN NICKEL | -24 24 VOLT HALOGEN |
| MO2 | TWO-CIRCUIT MONORAIL | | | | |

Note: MP includes 4" Round Flush Canopy. Note: MP includes 4 Round Flush Canopy.

When installing LED option on MO2 only magnetic transformers may be used.

Chrome not offered on Monorail & Two-Circuit Monorail.



700 ____ VEI ____

FIXTURE TYPE: _____

JOB NAME: _____

NOTES: _____



©2017 Tech Lighting, L.L.C. All Rights Reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.