

With its unassuming minimalist profile, The Vex outdoor LED wall sconce features up and down lighting and delivers a wide range of optical control and illumination options in a unique and deceptively simple design. Independent, up and down beam angles from 10° - 120° are achieved with simple tool-free adjustment. Beams can be set symmetric or asymmetric in both directions and are lockable. Angle markers ensure consistent and precise aiming and adjustment from fixture to fixture. Vex is ideal for indoor or outdoor accent lighting, ambient and/or way-finding applications where beam angle is critical and/or being used to add dramatic effects.

Key features

- Tool-free, independent, up/down beam angle adjustment 10° - 120°
- Asymmetric or Symmetric Beam Shaping
- Lockable
- Angle markers for consistent and precise aiming

SPECIFICATIONS

DELIVERED LUMENS	554
WATTS	18.7
VOLTAGE	Universal 120V - 277V
DIMMING	0-10V, ELV, TRAC, CL
LIGHT DISTRIBUTION	Symmetric or Asymmetric depending on barn doors position
MOUNTING OPTIONS	Wall
OPTICS	Adjustable beam spread
CCT	2700K, 3000K or 4000K
CRI	90+
COLOR BINNING	3-Step
BUG RATING	B0-U3-G0
DARK SKY	Non-Compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 35,000 Hours
WARRANTY*	5 years

* Visit techlighting.com for specific warranty limitations and details.



VEX
shown in black



VEX
shown in bronze




VEX
shown in charcoal



VEX
shown in white

ORDERING INFORMATION

7000WVEX	CRI/CCT	LENGTH	FINISH	INPUT VOLTAGE
	927 90 CRI, 2700K	4 4"	H CHARCOAL	UNV UNV 120V-277V
	930 90 CRI, 3000K		Z BRONZE	
	940 90 CRI, 4000K		W WHITE	
			B BLACK	




Vex

PHOTOMETRICS*

*For latest photometrics, please visit www.techlighting.com/OUTDOOR

VEX

- Total Lumen Output: 554
- Total Power: 18.7
- Luminaire Efficacy: 29.6
- Color Temp: 3000K
- CRI: 90+
- BUG Rating: B0-U3-G0

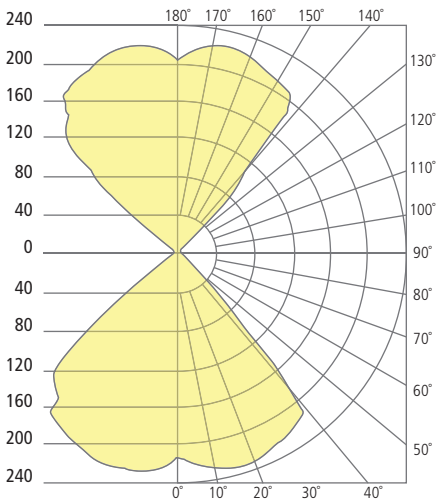

PROJECT INFO

FIXTURE TYPE & QUANTITY	JOB NAME & INFO	NOTES