

In dramatic contrast to the die-cast metal body, two symmetrical reveals cut from a solid piece of optically pure acrylic adorn the top and bottom of the Voto wall sconce. Beautiful LED light pours from the top and bottom of the thick-cut acrylic to provide ample illumination. Also available as a downlight or uplight to meet the needs of all outdoor applications.

### High quality LM80-tested LEDs

for consistent long-life performance and color

### Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

### Up light and down light option

## SPECIFICATIONS

DELIVERED LUMENS	909.1 Up-Downlight / 538.2 Downlight
WATTS	19.9 Up-Downlight / 11.5 Downlight
VOLTAGE	Universal 120-277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric Up/Down Lighting, or Down Only
MOUNTING OPTIONS	Wall
PERFORMANCE OPTIONS	Photocontrol / In-Line Fuse / Surge Protector
CCT	3000K or 4000K
CRI	80+
COLOR BINNING	3 Step
BUG RATING	Up-Downlight B0-U3-G1 / Downlight B0-U2-G0
DARK SKY	Compliant (Downlight)
WET LISTED	IP65
GENERAL LISTING	ETL, Title 24
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years

\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.




VOTO 6, DOWN ONLY  
shown in bronze



VOTO 6, DOWN ONLY  
shown in charcoal



VOTO 6, UP/DOWN  
shown in bronze




VOTO 6, UP/DOWN  
shown in charcoal

## ORDERING INFORMATION


7000WVOT	CRI/CCT	LENGTH	FINISH	FUNCTION*	VOLTAGE	DISTRIBUTION	OPTIONS
	830 80 CRI, 3000K 840 80 CRI, 4000K	6 6"	Z BRONZE H CHARCOAL	DO DOWNLIGHT ONLY UD UPLIGHT /DOWNLIGHT	UNV 120V-277V	S SYMMETRIC	NONE PC BUTTON PHOTOCONTROL LF IN-LINE FUSE SP SURGE PROTECTION PCLF BUTTON PHOTOCONTROL & IN-LINE FUSE PCSP BUTTON PHOTOCONTROL & SURGE PROTECTION LFSP IN-LINE FUSE & SURGE PROTECTION PCLFSP BUTTON PHOTOCONTROL, IN-LINE FUSE & SURGE PROTECTION

\*DOWNLIGHT - 9W/850 LUMENS; UP & DOWNLIGHT - 18W/1500 LUMENS

# VOTO 6 WALL SCNCE



Voto Small, Down Only



Voto Small, Up/Down

## PHOTOMETRICS\*



\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)

### VOTO 6 UP/DOWN

Total Lumen Output: 909  
 Total Power: 19.9  
 Luminaire Efficacy: 45.6  
 Color Temp: 4000K  
 CRI: 80+  
 BUG Rating: B0-U3-G1

### VOTO 6 DOWN

Total Lumen Output: 538.2  
 Total Power: 11.5  
 Luminaire Efficacy: 46.6  
 Color Temp: 4000K  
 CRI: 80+  
 BUG Rating: B0-U2-G0

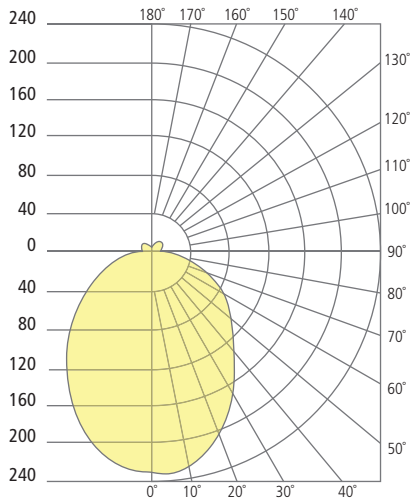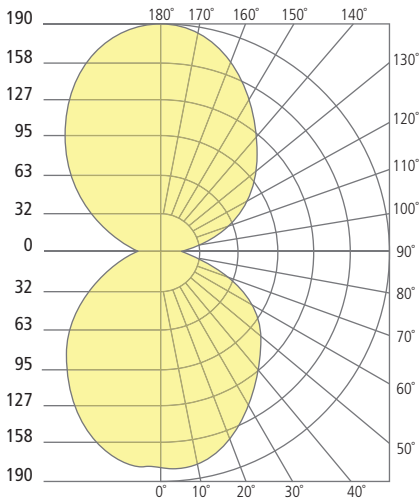

## PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

---



---



---



---



---



---



GENERATION BRANDS

7400 Linder Avenue, Skokie, Illinois 60077

T 847.410.4400 F 847.410.4500



© 2016 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.