

Simple elegance is taken to a whole new level with the Voto bollard. A minimalist die-cast metal body is topped with a symmetrical reveal cut from a solid piece of optically pure acrylic. Beautiful LED light pours from the bottom of the thick-cut acrylic to provide ample illumination.

### High quality LM80-tested LEDs

for consistent long-life performance and color

### Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

## SPECIFICATIONS

DELIVERED LUMENS	683 (120V), 450 (12V)
WATTS	15
VOLTAGE	Universal 120-277V, with integral transient 2.5kV surge protection (driver) or 12V
SECONDARY SURGE PROTECTOR	10kA
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric Downlight
MOUNTING OPTIONS**	Bolt
PERFORMANCE OPTIONS	Photocontrol
CCT	2700K, 3000K or 4000K
CRI	80+
COLOR BINNING	3 Step
BUG RATING	B0-U2-G1
DARK SKY	Compliant (Downlight)
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years
WEIGHT	8.6 lbs.

\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.  
 \*\*Bollard base not suitable for branch circuit through wiring.



VOTO BOLLARD  
shown in bronze

VOTO BOLLARD  
shown in charcoal

### 12V AC TRANSFORMERS\*



(OUTDOOR RATED, ORDERED SEPARATELY)

ITEM	DESCRIPTION	HOUSING	DIMMING
700OT150T	MAGNETIC, 150W, 120V	STAINLESS STEEL	MAGNETIC
700OT150T277	MAGNETIC, 150W, 277V	STAINLESS STEEL	MAGNETIC
700OT300T	MAGNETIC, 300W, 120V	STAINLESS STEEL	MAGNETIC

## ORDERING INFORMATION

7000BVOT	CRI/CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
827	80 CRI, 2700K	42 42"	D DIFFUSE	Z BRONZE	UNV 120V-277V	S SYMMETRIC	NONE
830	80 CRI, 3000K			H CHARCOAL	12 12V		PC BUTTON PHOTOCONTROL
840	80 CRI, 4000K						

\*12V TRANSFORMER ORDERED SEPARATELY.

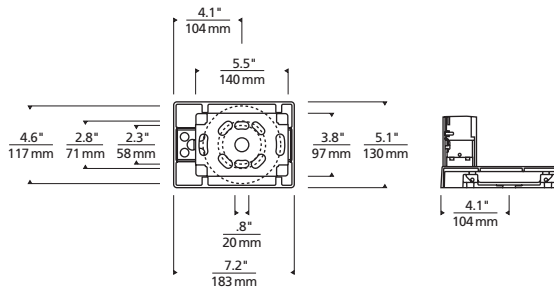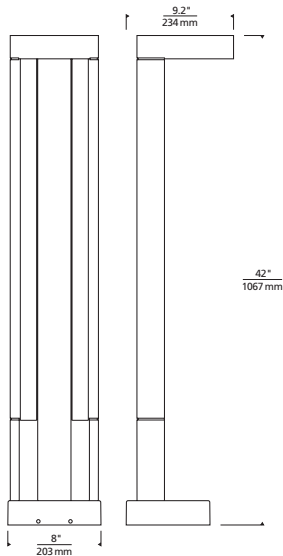

Voto Bollard


Anchor Plate Bolt Pattern

## PHOTOMETRICS\*

\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)

### VOTO BOLLARD

Total Lumen Output: 683.1  
 Total Power: 14.9  
 Luminaire Efficacy: 45.5  
 Color Temp: 4000K  
 CRI: 80+  
 BUG Rating: BO-U2-G1

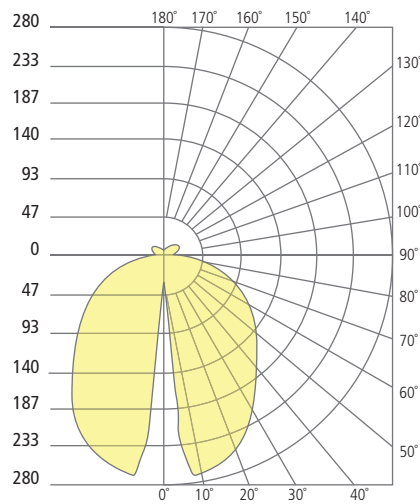

## PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

---



---



---



---



---



---