

Simple elegance is taken to a whole new level with the Voto bollard. A minimalist die-cast metal body is topped with a symmetrical reveal cut from a solid piece of optically pure acrylic. Beautiful LED light pours from the bottom of the thick-cut acrylic to provide ample illumination. For a coordinated look, also available as a wall sconce and path light.

Outstanding protection against the elements:

- Powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

SPECIFICATIONS

DELIVERED LUMENS	683.1 (120V), 450 (12V)
WATTS	15
VOLTAGE	Universal 120-277V, with integral transient 2.5kV surge protection (driver) or 12V
SECONDARY SURGE PROTECTOR	10kA
DIMMING	0-10, ELV, MLV (12V)
LIGHT DISTRIBUTION	Symmetric Downlight
MOUNTING OPTIONS**	Bolt
PERFORMANCE OPTIONS	Photocontrol
CCT	2700K, 3000K or 4000K
CRI	80+
COLOR BINNING	3 Step
BUG RATING	B0-U2-G1
DARK SKY	Compliant (Downlight)
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2019 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Powder Coat
LED LIFETIME	L70; >60,000 Hours
WARRANTY*	5 Years
WEIGHT	8.6 lbs.

* Visit techlighting.com for specific warranty limitations and details.
 **Bollard base not suitable for branch circuit through wiring.



VOTO BOLLARD
shown in bronze

VOTO BOLLARD
shown in charcoal

12V AC TRANSFORMERS*


(OUTDOOR RATED, ORDERED SEPARATELY)

ITEM	DESCRIPTION	HOUSING	DIMMING
700OT150T	MAGNETIC, 150W, 120V	STAINLESS STEEL	MAGNETIC
700OT300T	MAGNETIC, 300W, 120V	STAINLESS STEEL	MAGNETIC


ORDERING INFORMATION

PRODUCT	CRI/CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
7000BVOT	827 80 CRI, 2700K 830 80 CRI, 3000K 840 80 CRI, 4000K	42 42"	D DIFFUSE	Z BRONZE H CHARCOAL	UNV 120V-277V 12 12V*	S SYMMETRIC	NONE PC BUTTON PHOTOCONTROL

*12V TRANSFORMER ORDERED SEPARATELY.

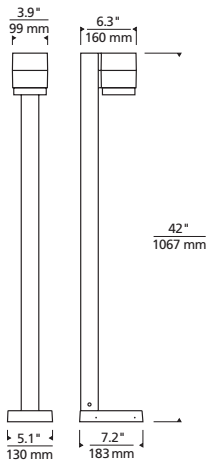

Voto Bollard

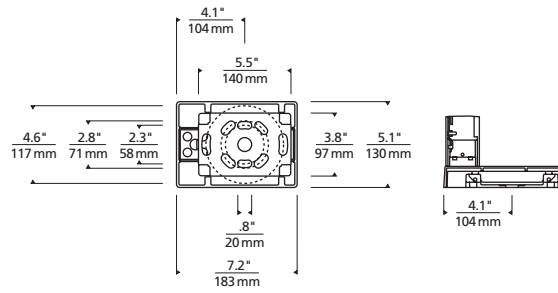


Anchor Plate Bolt Pattern

PHOTOMETRICS*

*For latest photometrics, please visit www.techlighting.com/OUTDOOR

VOTO BOLLARD

Total Lumen Output: 683.1
 Total Power: 14.9
 Luminaire Efficacy: 45.5
 Color Temp: 4000K
 CRI: 80+
 BUG Rating: BO-U2-G1

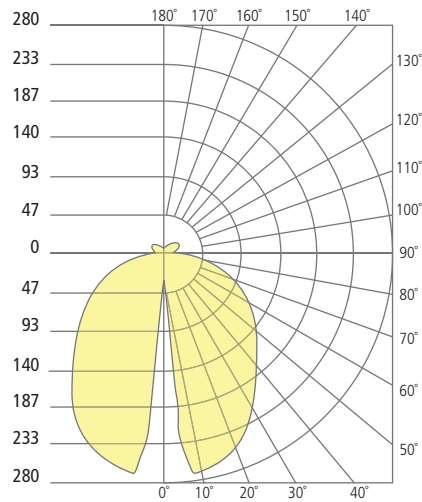

PROJECT INFO

FIXTURE TYPE & QUANTITY	JOB NAME & INFO	NOTES