

In dramatic contrast to the contemporary design, die-cast metal body, one symmetrical reveal cut from a solid piece of optically pure acrylic adorn the bottom of the Voto path. Beautiful LED light pours from the bottom of the thick-cut acrylic to provide ample illumination. Also available as a wall sconce, and bollard to meet the needs of all outdoor applications.

**High quality LM80-tested LEDs**

for consistent long-life performance and color

**Outstanding protection against the elements:**

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

**Bolt or Stake mounting options**

SPECIFICATIONS

DELIVERED LUMENS	418
WATTS	12
VOLTAGE	12V (Transformer sold separately)
DIMMING	MLV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Bolt or Stake
CCT	2700K, 3000K
CRI	90
COLOR BINNING	3 Step
BUG RATING	B0-U2-G0
DARK SKY	Non-compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years
WEIGHT	2.8 lbs.

\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.



VOTO 18 PATH  
shown in bronze



VOTO 18 PATH  
shown in charcoal


**12V AC TRANSFORMERS\***  
(OUTDOOR RATED, ORDERED SEPARATELY)

ITEM	DESCRIPTION	HOUSING	DIMMING
<b>700OT150T</b>	MAGNETIC, 150W, 120V	STAINLESS STEEL	MAGNETIC
<b>700OT150T277</b>	MAGNETIC, 150W, 277V	STAINLESS STEEL	MAGNETIC
<b>700OT300T</b>	MAGNETIC, 300W, 120V	STAINLESS STEEL	MAGNETIC

ORDERING INFORMATION

700OAVOT	CRI/CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
	<b>927</b> 90 CRI, 2700K	<b>18</b> 18"	<b>D</b> DIFFUSE	<b>Z</b> BRONZE	<b>12</b> 12V*	<b>S</b> SYMMETRIC	CONCRETE MOUNT
	<b>930</b> 90 CRI, 3000K			<b>H</b> CHARCOAL			<b>ST</b> STAKE MOUNTING KIT

\*12V TRANSFORMER ORDERED SEPARATELY.




Voto Path

## PHOTOMETRICS\*

\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)

### VOTO PATH

- Total Lumen Output: 418
- Total Power: 12
- Luminaire Efficacy: 35
- Color Temp: 3000K
- CRI: 80+
- BUG Rating: B0-U2-G0

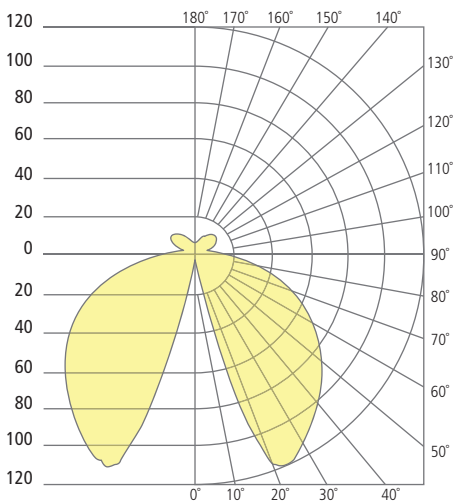

## PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

---



---



---



---



---



---