

WALL COLLECTION

Windrush Wall LED ADA SORAA T20

DESCRIPTION


Twin panes of glass or acrylic extend from the center decorative metal arm of the Windrush bath light fixture as a special co-extruded remote phosphor LED light source backlights the panes with a beautifully smooth wash of light. 1' version includes 14 watt, 238 delivered lumens, 2' version includes 20 watt, 514 delivered lumens of LED's. Both available in 4 CCT options and 2 CRI options. May be mounted horizontally or vertically. ADA compliant. Works with SORAA.

INSTALLATION


This product can mount to either a 4" square electrical box with round plaster ring or an octagonal electrical box (not included).

WEIGHT

7.8-15.6lb / 3.54-7.08kg ±

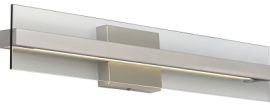

modern detail

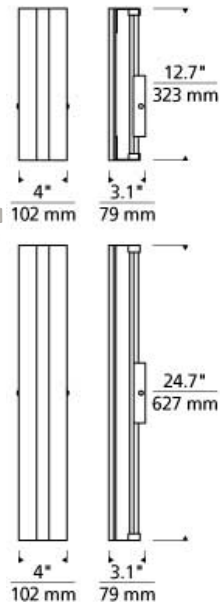

modern detail



water detail

ORDERING INFORMATION

700WSWIN	LENGTH (A)	COLOR	FINISH	LAMP
1	12"	M MODERN DETAIL	Z ANTIQUE BRONZE	-LED824 LED 80 CRI 2400K 120V
2	24"	T WATER DETAIL	C CHROME	-LED824-277 LED 80 CRI 2400K 277V
			Y WHITE ACRYLIC	-LED835 LED 80 CRI 3500K 120V
			W WHITE GLASS	-LED835-277 LED 80 CRI 3500K 277V
				-LED840 LED 80 CRI 4000K 120V
				-LED840-277 LED 80 CRI 4000K 277V
				-LED930 LED 90 CRI 3000K 120V
				-LED930-277 LED 90 CRI 3000K 277V



Tech Lighting, L.L.C.

700WSWIN _____

FIXTURE TYPE: _____

JOB NAME: _____

NOTES: _____



©2018 Tech Lighting, L.L.C. All Rights Reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.