

PRODUCT FEATURES

- Sophisticated modern design
- Mult-layered acrylic shade for an exceptional vanity lighting experience
- Can be mounted horizontally and vertically
- Also available from Tech Lighting is the shorter length Metro Bath light
- Fully-dimmable integrated LED lighting
- Protected by a 5-year warranty



LAMPING

Includes 49 watt, 2008 delivered lumen, 2700K or 3000K LED module. Dimmable with low-voltage electronic or triac dimmer. Mounts vertically or horizontally.

Chrome



Satin Nickel

Chrome

ORDERING INFORMATION

700BCMETL COLOR	FINISH	LAMP
Y WHITE ACRYLIC	C CHROME	-LED927 LED 90 CRI 2700K 120V
	S SATIN NICKEL	-LED927-277 LED 90 CRI 2700K 277V
		-LED930 LED 90 CRI 3000K 120V
		-LED930-277 LED 90 CRI 3000K 277V

700BCMETL _____

JOB NAME _____


NOTES _____



METRO LONG BATH

SPECIFICATIONS

HARDWARE MATERIAL	Metal
SHADE MATERIAL	Acrylic
NET WEIGHT	7 lbs
HEIGHT	4.8in
WIDTH	3.9in
LENGTH	49.5in
WET LISTED	
DAMP LISTED	
DRY LISTED	
GENERAL LISTING	
INCLUDES	

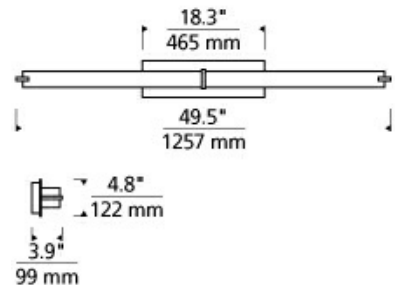

LAMPING SPECIFICATIONS

	LED LAMP	INTEGRATED LED	NON LED	NO LAMP
DELIVERED LUMENS				
WATTS		49		
MAX WATTAGE PER BULB		49W		
INPUT VOLTAGE		120V 277V		
DIMMING TYPE*		White Acrylic : ELV, TRIAC White Acrylic : 0-10V		
CCT		White Acrylic : 2700K White Acrylic : 3000K		
CRI		90 CRI		
LED LIFETIME				
L70				
AVERAGE BULB HOURS		50000		
FIELD SERVICEABLE LED				
LAMP BASE		Integrated LED		
LAMP SHAPE		Integrated LED		
LAMP INCLUDED?		Y		
WARRANTY**		5 Years		

*Dimming information available at www.techlighting.com/Downloads#dimming

** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 INFORMATION

	Integrated LED	Replacement LED Lamp	No Lamp *
This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6.	No		
This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California.	N/A		

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

