

# MONORAIL POWER EXTENDER



## PRODUCT FEATURES

## LAMPING

For dual-feed canopies and transformers, order two. Field-cuttable.



MonoRail Power Extender



MonoRail Power Extender

## ORDERING INFORMATION

| 700MOP | LENGTH (A) | FINISH           |
|--------|------------|------------------|
|        | 03 3"      | Z ANTIQUE BRONZE |
|        | 06 6"      | S SATIN NICKEL   |
|        | 12 12"     |                  |
|        | 24 24"     |                  |
|        | 36 36"     |                  |
|        | 48 48"     |                  |
|        | 96 96"     |                  |

700MOP \_\_\_\_\_

JOB NAME \_\_\_\_\_

NOTES \_\_\_\_\_

\_\_\_\_\_




# MONORAIL POWER EXTENDER



## SPECIFICATIONS

|                           |            |
|---------------------------|------------|
| HARDWARE MATERIAL         |            |
| SHADE MATERIAL            |            |
| NET WEIGHT                | 0.25 lbs   |
| HEIGHT                    | 3in        |
| WIDTH                     | 0.5in      |
| LENGTH                    |            |
| WET LISTED                |            |
| DAMP LISTED               |            |
| DRY LISTED                |            |
| SLOPED CEILING ADAPTABLE? | No         |
| GENERAL LISTING           | ETL Listed |
| INCLUDES                  |            |

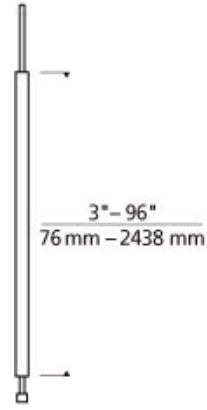

## LAMPING SPECIFICATIONS

|                       | LED LAMP | INTEGRATED LED | NON LED | NO LAMP |
|-----------------------|----------|----------------|---------|---------|
| DELIVERED LUMENS      |          |                |         |         |
| WATTS                 |          |                |         |         |
| MAX WATTAGE PER BULB  |          |                |         |         |
| INPUT VOLTAGE         |          |                |         |         |
| DIMMING TYPE*         |          |                |         |         |
| CCT                   |          |                |         |         |
| CRI                   |          |                |         |         |
| LED LIFETIME          |          |                |         |         |
| L70                   |          |                |         |         |
| AVERAGE BULB HOURS    |          |                |         |         |
| FIELD SERVICEABLE LED |          |                |         |         |
| LAMP BASE             |          |                |         |         |
| LAMP SHAPE            |          |                |         |         |
| LAMP INCLUDED?        |          |                | Y       |         |
| WARRANTY**            |          |                |         |         |

\*Dimming information available at [www.techlighting.com/Downloads#dimming](http://www.techlighting.com/Downloads#dimming)  
 \*\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.

## T20 / T24 INFORMATION

|  | Integrated LED | Replacement LED Lamp | No Lamp * |
|--|----------------|----------------------|-----------|
| This product can be used to comply with California Building Energy Efficiency Standards 2016 <b>Title 24</b> Part 6.                                 |                |                      |           |
| This product can be used to comply with California Appliance Efficiency Standards 2016 <b>Title 20</b> and may be shipped to and sold in California. |                |                      |           |

\* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

