

PRODUCT FEATURES



LAMPING

A sleek plate of glass floats in front of a special co-extruded remote phosphor LED channel to provide flawless, even illumination. 4' version includes 16 watts, 1040 net lumens or 32 watts, 2080 net lumens of LEDs available in 2 CCT options and 2 CRI options.

Clear Chrome



Clear Chrome Smoke Satin Nickel

ORDERING INFORMATION

700BCGIAR SHAPE OR SIZE	LENGTH (A)	COLOR	FINISH	LAMP	VOLTAGE
3 300LMS/FT	48 48"	K SMOKE	C CHROME	-LED835 LED 80 CRI 3500K	120 VOLT
6 600LMS/FT				-LED930 LED 90 CRI 3000K	-277 277 VOLT

700BCGIAR _____

JOB NAME _____


NOTES _____



GIA 48 BATH

SPECIFICATIONS

HARDWARE MATERIAL
SHADE MATERIAL
NET WEIGHT
HEIGHT
WIDTH
LENGTH
WET LISTED
DAMP LISTED
DRY LISTED
GENERAL LISTING
INCLUDES

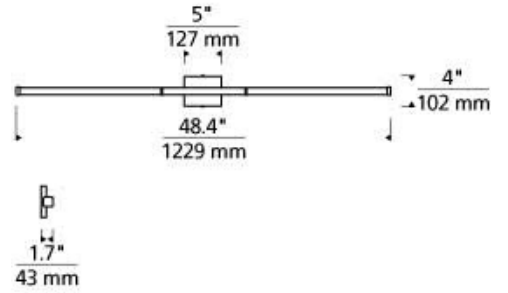

LAMPING SPECIFICATIONS

	LED LAMP	INTEGRATED LED	NON LED	NO LAMP
DELIVERED LUMENS				
WATTS				
MAX WATTAGE PER BULB				
INPUT VOLTAGE				
DIMMING TYPE*				
CCT				
CRI				
LED LIFETIME				
L70				
AVERAGE BULB HOURS				
FIELD SERVICEABLE LED				
LAMP BASE				
LAMP SHAPE				
LAMP INCLUDED?				
WARRANTY**				

*Dimming information available at www.techlighting.com/Downloads#dimming
 ** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 INFORMATION

	Integrated LED	Replacement LED Lamp	No Lamp *
This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6.			
This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California.			

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

