

AUDRA PENDANT

PRODUCT FEATURES

- Mouth-blown thick organic flowing glass
- Modern design style
- Complementary Audra Grande Pendant also available from Tech Lighting
- Fully dimmable LED and Halogen lamping options to create the desired ambiance
- Ideal for kitchen island task lighting, bathroom lighting and home office lighting
- Protected by a 1-year warranty



LAMPING

Includes low-voltage, 35 watt halogen bi-pin lamp or 8 watt, 300 delivered lumen, replaceable LED SORAA® module. Dimmable with low-voltage electronic or magnetic dimmer (based on transformer). Fixture provided with six feet of field-cuttable cable.

Clear



Clear

Smoke

Surf Green

White

ORDERING INFORMATION

| 700 | SYSTEM | ADR | COLOR | FINISH | LAMP |
|-----|-------------------------------------|-----|---|---------------------------|--|
| | TD LINE-VOLTAGE PENDANTS/SUSPENSION | | C CLEAR K SMOKE G SURF GREEN W WHITE | B BLACK S SATIN NICKEL | 12 VOLT HALOGEN (T20) -LED5930 12 VOLT LED 90 CRI 3000K (T20/T24) |

Please note. Not compatible with Low-Voltage systems such as Monorail or FreeJack due to weight.

700 _____ ADR _____

JOB NAME _____


NOTES _____



AUDRA PENDANT

SPECIFICATIONS

| | |
|-------------------------------|------------|
| HARDWARE MATERIAL | Metal |
| SHADE MATERIAL | Glass |
| NET WEIGHT | 6 lbs |
| HEIGHT | 5.9in |
| WIDTH | 5.3in |
| LENGTH | 5.3in |
| UP LIGHT / DOWN LIGHT / BOTH? | |
| WET LISTED | |
| DAMP LISTED | Yes |
| DRY LISTED | |
| MIN. HANGING HEIGHT | 12.4in |
| MAX HANGING HEIGHT | 78.4in |
| TOTAL CORD LENGTH | 72in |
| TOTAL STEM LENGTH | |
| STEM QTY | |
| SLOPED CEILING ADAPTABLE? | Yes |
| GENERAL LISTING | ETL Listed |
| INCLUDES | |

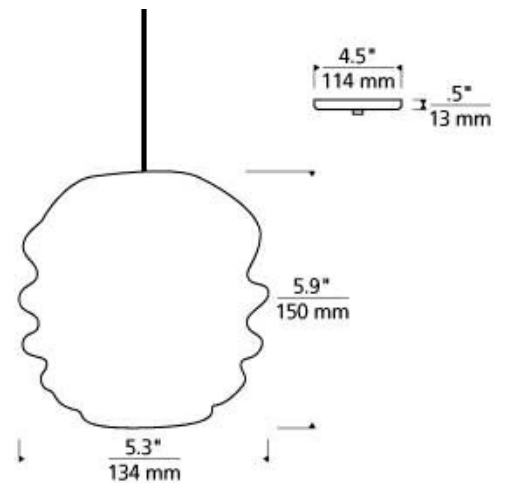

LAMPING SPECIFICATIONS

| | LED LAMP | INTEGRATED LED | NON LED | NO LAMP |
|-----------------------|------------|----------------|------------|---------|
| DELIVERED LUMENS | 300 | | 300 | |
| WATTS | 8 | | 35 | |
| MAX WATTAGE PER BULB | 35W | | 35W | |
| INPUT VOLTAGE | 120V | | 120V | |
| DIMMING TYPE* | ELV, TRIAC | | ELV, TRIAC | |
| CCT | 3000K | | | |
| CRI | 90 CRI | | | |
| LED LIFETIME | | | | |
| L70 | | | | |
| AVERAGE BULB HOURS | 25000 | | | |
| FIELD SERVICEABLE LED | | | | |
| LAMP BASE | GU5.3 | | GY 6.35 | |
| LAMP SHAPE | LED Bi-Pin | | T4 | |
| LAMP INCLUDED? | Y | | Y | |
| WARRANTY** | 5 Years | | 1 Year | |

*Dimming information available at www.techlighting.com/Downloads#dimming

** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 INFORMATION

| | Integrated LED | Replacement LED Lamp | No Lamp * |
|--|----------------|----------------------|-----------|
| This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6. | | Yes | |
| This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California. | | Yes | |

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

